



R I D E

B E Y O N D

DEALER PROGRAM 2019
ENGLISH



#RIDEBEYOND

ENGINEERED IN GERMANY
SINCE 1993

SMART
PERFORMANCE
BIKES

THE FOCUS BRAND
PAGE 02

WHAT'S NEW
PAGE 24

TECHNOLOGY
PAGE 32

GEOMETRY
PAGE 192

E-MTB FULLY	ALL-MOUNTAIN ENDURO	JAM² FOCUS SAM²	PAGE 56 PAGE 64
E-MTB HARDTAIL	RACE EVERYDAY & FITNESS TOURING & SPORT TRAIL	RAVEN² WHISTLER² JARIFA² JAM² HT	PAGE 70 PAGE 74 PAGE 78 PAGE 86
E-ROAD	ENDURANCE	PARALANE²	PAGE 94
E-ALLROUND	CITY TREKKING	PLANET² AVENTURA²	PAGE 102 PAGE 106
JUNIOR & KIDS	TRAIL	JAM² HT JUNIOR	PAGE 186

PURE BIKES

MTB FULLY	CROSS-COUNTRY & MARATHON	FOCUS 01E	PAGE 112
	ALL-MOUNTAIN ENDURO	JAM FOCUS SAM	PAGE 116 PAGE 122
MTB HARDTAIL	CROSS-COUNTRY SPORT & EVERYDAY	RAVEN WHISTLER	PAGE 128 PAGE 134
ROAD & CYCLO-CROSS	RACE	IZALCO MAX IZALCO RACE	PAGE 144 PAGE 152
	ENDURANCE CYCLO-CROSS	PARALANE MARES	PAGE 158 PAGE 164
ALLROUND	CITY FITNESS & CITY HYBRID	PLANET ARRIBA CRATER LAKE	PAGE 172 PAGE 176 PAGE 180

R I D E

RAVEN® Pro, FOCUS Transalp36, Tremalzo Pass (IT)

B E Y O N D







RIDE BEYOND

Push your boundaries – we build bikes for riders who want more. More performance. More experience. More inspiration. Whether you're hitting asphalt or trails, alone or in a team, or simply riding with your friends, you'll outperform yourself. In these moments, you share everything. The riding fun. The ambition. The desire to go further than ever before. You push one another to achieve peak performance, forever searching for new experiences. Just ride beyond!

SQUARED EXPERIENCES

To ensure that your rides take you even further, we've developed the FOCUS Squared range. Our high-performance E-Bikes have everything that makes our Pure range so successful: innovative technology, performance-oriented geometry, perfect handling ... and, to top it all off, an enhanced riding experience. For extended trips, better uphill flow and reliable energy reserves. Pure or Squared? The choice is yours. You'll be sweating either way.




ENGINEERED IN GERMANY

For us, development is also about pushing boundaries. To build good bikes, you have to be close. Close to the sport, close to the market, close to the customer. That's why we develop all our bikes in Germany, where we pool the skills of our designers and engineers to drive product innovations forward and to deliver unquestionable all-round quality. But don't just take our word for it! Test one of the multi-award-winning FOCUS bikes for yourself today!

SMART PERFORMANCE BIKES

The people behind FOCUS have turned their passions into their professions. One of these people is the World Cyclo-Cross Champion, Mike Kluge, who founded the brand in 1993 to pour all his bicycle racing experience into product development. To this day, our E-Bikes are created outside, on the road. Developed and tested by the FOCUS team riders. Uncompromising performance; smart technology and design. We work hard so that everything feels easy for you.



S I N C E 1 9 9 3



ENGINEERED IN GERMANY


BIKES ARE ONLY AS GOOD AS THE WAY THEY'RE PUT TOGETHER

German engineering has a centuries long heritage of precision, craftsmanship, and durability. At Focus we're proud of carrying on that long-standing tradition by how we design and develop our bikes. Every engineer at Focus Bikes is a passionate bike rider first and foremost.

You can see or understand this when you cast a glance at our development program. At the foundation of every design is you, the rider, that is central to all design input and ideas. Every model is designed around you. But we don't stop there, we push ourselves to progress our bikes to the next level, and along the way create the forward-thinking designs and products that we have come to be known for. Our engineering is done to the typical high standards of German precision and attention to details.

Final designs are then tested above and beyond industry standards and legal regulations, to make sure they hold up in real-world use and the reality of the roads and trails out there. Final production is carried out with the latest technologies and finest methods available in the cycling industry.

This is why we are proud to say that we are Engineered in Germany.



25 YRS **XXV** FOCUS

25 YRS FOCUS BIKES

STRIVING FOR THE OPTIMUM

EVEN AT THE BEGINNING OF HIS CAREER, MIKE KLUGE WAS SURE OF ONE THING: THE RIGHT BIKE IS CRUCIAL TO HEALTH, FUN AND SUCCESS. FROM THE VERY OUTSET, HE SAW CRITICAL FEEDBACK ON MATERIAL AS JUST AS MUCH A PART OF HIS RESPONSIBILITY VIS-À-VIS SPONSORS AS WINNING RACES. DISSATISFIED WITH THE TIME IT TOOK TO IMPLEMENT ANY SUGGESTED IMPROVEMENTS, HE DECIDED TO TAKE MATTERS INTO HIS OWN HANDS.

AT THE TIME, HE HAD WON COUNTLESS GERMAN CHAMPIONSHIPS AND TWO WORLD CHAMPION TITLES IN CYCLOCROSS AT AMATEUR LEVEL. HOWEVER, IN 1990, WHEN HE LOST THE UNOFFICIAL MOUNTAIN BIKE WORLD CHAMPION TITLE IN ITALY BY A WHISKER AS A RESULT OF A MATERIAL DEFECT, HE DECIDED SOMETHING HAD TO GIVE.



Mike Kluge, Cyclo-Cross-World-Championship 1985, Munich (DE)

25 YRS



FOCUS



PROFESSIONAL WORLD CHAMPION – 1992 IN LEEDS

No sooner said, than done: in 1992, Mike Kluge won the professional world champion title in Leeds, Great Britain, on a self-built cyclocross bike. On the back of this success, he decided it must be now or never and founded the bike brand FOCUS together with Hans-Jörg Furrer in the Black Forest in Germany. As a successful professional cyclist on the road, track, in cyclocross, and on the XC and downhill mountain bike, he was able to leverage his extensive knowledge of the advantages of the various bike types and incorporate them into other areas.

The branding was inspired by the autofocus of a camera that hones in on the centre of an object, getting right to the heart of things. From then on, he focussed exclusively on the development of bicycle frames, the correct combination of components and nurturing a close cooperation with local part manufacturers. For a while his professional career took a back seat, with brand rights and development devouring huge amounts of time and money. And while giving up simply wasn't an option, the dream of getting back to the top of the cycling profession with FOCUS was never far from his thoughts.



THE BIRTH OF FOCUS BIKES

And his tenacity paid off. His new, self-made bikes were hugely successful and, in 1993, Mike Kluge won two mountain bike World Cups for FOCUS with many more titles to follow. 1993 also saw the achievement of another significant milestone: the sale of the first FOCUS bike – the birth of FOCUS as a bike manufacturer.

In 1994, Mike Kluge started his own FOCUS team, which included Jörg Arenz, Tobias Nestle and Jens Reuker, who still help shape the company. A new brand – and a rising star – was born, a star that continues to rise to this day.



Mike Kluge, Cyclo-Cross-World-Championship 1985, Munich (DE)

FOCUS DESIGN STUDY 25

INNOVATION FOR TOMORROW

Their ambition as a team to achieve the best in design, build and material has always been the driving force, both then and now. Innovation also plays a key role – as demonstrated by the pioneering SQUARED EXPERIENCE. The FOCUS engineers have opened the door to a whole new dimension of bike riding: the advantages of the E-Bike coupled with the unique ride characteristics that only FOCUS E-Bikes offer – giving cyclists an unprecedented riding experience. A new dimension, that remains a labour of love for Mike Kluge to this day.

It goes without saying that the development of FOCUS is an ongoing process: working together, the FOCUS designers have brought their vision of the future to life. But it's not about setting things in stone – the design study consciously leaves room for inspiration and technical innovation. Even specifying wheels would restrict this vision too much as it is intended to serve merely as a guideline of the type of design to be found in all future products.

FOCUS is unpretentious: nothing stands in the way of unadulterated riding pleasure. FOCUS is smart: each element of the frame has a purpose, nothing is over-designed, no gimmicks mar the bike experience.

FOCUS is technical: the streamlined design proudly exposes all sources of power at the heart of your ride; nothing is hidden behind add-on frippery. Exceptions are only made if there are (aerodynamic) advantages to be gained. Form and Function go hand in hand – a perfect collaboration design.






PROJECT Y



PROJECT Y forums to date

THE LIGHTEST RACING E-MOUNTAINBIKE – IS CURRENTLY THE RAVEN®
THE FIRST REAL E-RACING BIKE – IS THE PARALANE®

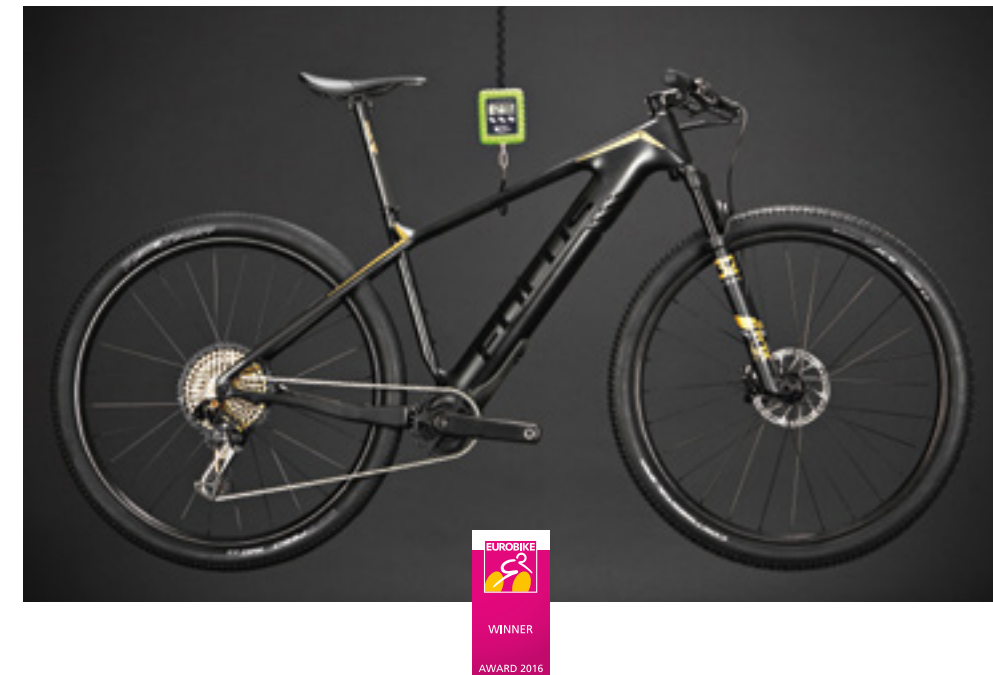

ABOUT PROJECT Y

PROJECT Y is our platform for the electric future. A playground for innovations and a forum where dreams are the topic of conversation. Here is where we showcase what is possible. Designs and ideas conceived by passionate cyclists – our engineers and product managers. We offer approaches without strict definitions. The Y in PROJECT Y stands for 'Why': Why is the current technology going in only one direction? We scrutinise the developments in our industry and blaze new trails when the cycling industry is already following established well-travelled routes. We want to inspire, collect feedback and encourage discussion. The right arm of the Y symbolizes the new paths we are taking.

The actual implementation of the project plays a decisive role in this respect. In the past, we have

seen a wealth of ideas concerning E-Bikes – both futuristic utopias and viable project sketches. However, the majority of these visions never make it off the drawing board. Concepts with no practical implementation are not open to assessment. Drawings are easier to visualise, but a rideable model is the only way of truly evaluating an E-Bike.

That's why the PROJECT Y always also looks finished, even though it's actually still in the prototype phase. After all, a test ride reveals the faults and issues that we cannot see in drawings. Despite everything, it is an ongoing project and we would like to invite you to get involved and provide us with your feedback. The PROJECT Y concepts don't strictly ever have to make it to mass production ... but they can, if they rouse enough interest.



AWARD WINNING PRODUCTS



FOCUS SAM ²

"It's a superb E-MTB with such a balanced handling package that it'll be a hit with newbies and pros in equal measure."

Design & Innovation Award 2018



PARALANE ²

"Until now, the trend towards electrification had largely passed road bikes by. We are convinced that this is set to change with Project Y."

GOLD winner Eurobike 2017



JAM ²

"Clear winner with impressive performance on difficult trails."

BIKE BILD 01/2017



PARALANE

"This is a bike that guarantees fun, offers hours of pure riding pleasure and is characterised particularly by both its high level of comfort and its handling."

Ciclista #21



JAM

"It acts immediately and agily in challenging terrain." Verdict: The new JAM fights in the battle for the best and most versatile mountain bike.

BIKE WORLD, NO. 40, 01/17



RAVEN ²

"A real innovation on the market of electric MTB race bikes..."

Eurobike winner 2016



RAVEN

"The new FOCUS RAVEN MAX is technically one of the best XC bikes currently on the market."

MTB News User Award 2015



MARES

"The FOCUS MARES FORCE 1 is an exceptional cyclocross race bike."

Bikeradar Oktober 2016



Our bikes are subjected to the most rigorous tests. We test them to their limits under the harshest conditions – both in the laboratory and on the road and the trail. As passionate bikers ourselves, we only design bikes that we ourselves would want to ride. But don't just take our word for it – a large amount of positive feedback and success in independent tests underscore the fact that we must be doing something right. Read for yourself what the press has to say about our bikes.

WHAT'S NEW

NEW IZALCO MAX IN THE WIND TUNNEL

The IZALCO MAX continues to advance and now perfectly masters all the requirements of a racing bike. Light on the mountain, nippy in the sprint, streamlined in the wind. In order to minimise aerodynamic drag, we optimised the racing bike in the wind tunnel and developed our own aerodynamic solutions.

In detail, this means that: all cables are run inside the frame and the handlebar stem. With this in mind, we specially developed a handlebar stem with a fully integrated headset. The seatpost was developed specially

for the IZALCO MAX and is an integral part of the design. The seatpost and handlebar stem, as is the entire IZALCO MAX, are made from carbon. This ensures an aerodynamic racing bike that is ultra-lightweight and super stiff. The IZALCO MAX is fitted with reliable disc brakes that give the rider ultimate control at high speeds, while the tweaks required to accommodate the brakes enabled FOCUS to create the perfect frame design.

PROJECT Y ROAD IS BECOMING A REALITY

Our pioneering work in the E-Racing segment has paid off. PROJECT Y Road has produced the PARALANE². From model year 2019, the FOCUS portfolio will include six PARALANE² models with a range of different features. Paramount with FOCUS is always the ride characteristics: the FOCUS PARALANE² is as agile and light as a racing bike without assistance. What's more, the motor/battery unit can be completely decoupled from the drivetrain, which ensures that the PARALANE² also rides really well without assistance. You only notice the motor and its assistance when you need it.

A true revolution in the racing segment are our wide 148mm and 110mm R.A.T. axles – the Road-Boost standard. The wide axles ensure an optimum chain line – in spite of the slightly protruding chainring on the E-Racing bikes – which in turn ensures an optimum gearshift and less wear and tear. The wider axles also improve stability and the durability of the wheels. In fact, everything you need for an unprecedented riding experience.



WHAT'S NEW

FOCUS SAM NOW WITH F.O.L.D.

The new FOCUS SAM now sees the last member of our full-suspension family fitted with our patented F.O.L.D. kinematics. F.O.L.D. stands for FOCUS Optimized Linkage Design. Optimised specially for the very high demands of the Enduro, the F.O.L.D. chassis on the FOCUS SAM ensures a perfectly balanced combination: F.O.L.D. is extremely sensitive while being progressive enough to prevent a harsh bottom out.

Our new FOCUS SAM is just at home in the bike park as in tough Enduro races. This is because the FOCUS SAM geometry is now specifically tailored to the requirements of the modern Enduro: a longer wheelbase and a flatter stem angle have made the FOCUS SAM king of descents. In addition, we have extended suspension travel by 10 mm – so that the new FOCUS SAM is now running 170 mm of travel both front and rear.



F.O.L.D. FOCUS OPTIMIZED LINKAGE DESIGN

WELCOME

GEOFF GULEVICH

NEW ATHLETE GEOFF GULEVICH RIDES FOCUS


From 2018, North Shore local and Rampage legend, Geoff Gulevich, will be riding FOCUS. What makes him special? Gully is the epitome of mountain biking. Bikes and the Canadian – a natural symbiosis. Nothing seems forced and he has a deep and diverse set of skills. Known for his super smooth and clean style, he almost always makes the right decisions. And if not, he just gets back up again. We are absolutely delighted to welcome him to the FOCUS family.

GEOFF: "I am unbelievably excited to join the FOCUS family. They have a rich and successful racing heritage for the past 25 years, filled with outstanding talent and products. I am honoured to help grow the brand and push the beautifully crafted German machines to their limits. The #ridebeyond mantra is a seamless fit to my vision and riding style; around the world and at home in BC. I can't wait to show the cycling community the capabilities of the FOCUS products!"

"IT'S GOING TO BE ONE HELL OF A RIDE!"



GEOFF GULEVICH
CA

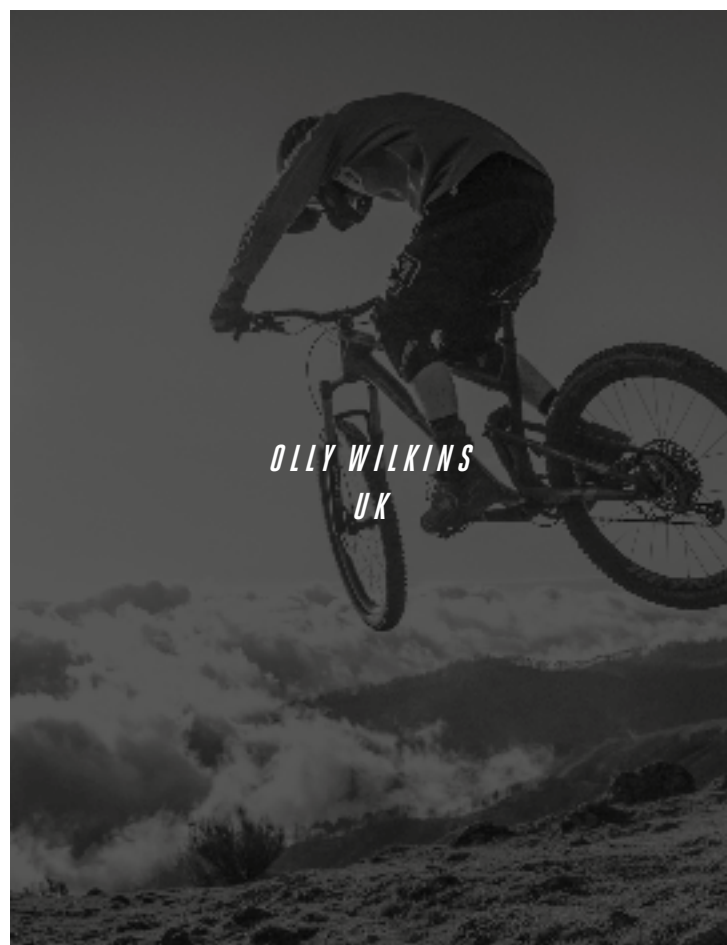

OLLY WILKINS
UK



STEPHANIE TELTSCHER
GER



FOCUS MTB RACING TEAM
FR



JOE CONNELL
UK



FABIAN SCHOLZ
GER

MEET THE TEAM

FOUNDED BY A RACING CYCLIST,
PROFESSIONAL SPORT HAS ALWAYS
PLAYED A KEY ROLE AT FOCUS.

There is bit of racing background in all of our products. Each development is designed for performance and meets the highest quality standards. Stage wins, national titles and world championships speak for our products and their performance in the toughest conditions. Our athletes expose the unforeseeable by testing under the harshest conditions. Pushing the boundaries – for bike and top athlete alike. Continuous feedback from our professional cyclists ensures that our products get progressively better with each development.

TESTED BY TOP ATHLETES. FOR YOU.

SQUARED EXPERIENCE

EXPERIENCE
SO MUCH MORE





A NEW DIMENSION IN RIDING

SQUARED EXPERIENCE

SQUARED EXPERIENCE adds a new dimension to your experience of our E-Bikes. And that's what makes our E-Bikes stand out from the crowd. So much more than just uphill and downhill, you will experience something completely different – a new dimension. You'll conquer new trails like never before and enjoy an unprecedented riding experience thanks to the advantages of the E-Bike coupled with the unique ride characteristics that only FOCUS E-Bikes offer. Your usual riding efforts will suddenly see you breaking new ground. More trails, more mountains, more fun. In the same time and with the same effort. The riding experience always comes first – and that is simply from another dimension. Expand your horizons.

PARALANE²
E-ROADBIKE

RAVEN²
RACE-HARDTAIL 100MM

JAM² HT JUNIOR
TRAIL-HARDTAIL 80MM

WHISTLER²
EVERYDAY & FITNESS

JARIFA²
TOURING & SPORT

REVOLUTIONARY PRODUCTS

This new dimension of riding is enabled by our pioneering engineers. Our products have revolutionised the world of E-Mountain bikes. The lightest E-MTB, the first true E-Racing bike, the most agile E-All-Mountain. Our technologies offer integration and smart technical details. The Tailored Energy Concept means you're only ever carrying as much energy as you actually need. Our innovations are always designed to offer the perfect riding experience and generate added value that transports you to a new dimension in biking. Our innovative E-Bikes have been honoured with many awards. The clear overall message from all test reviews: no E-Bike is as agile and dynamic as the FOCUS.

AVENTURA²
TREKKING

PLANET²
CITY

JAM² HT
TRAIL-HARDTAIL 120MM

JAM²
TRAIL- ALL-MOUNTAIN 150MM

FOCUS SAM²
ENDURO 170MM



ALWAYS AS MUCH ENERGY AS YOU NEED



T.E.C. - TAILORED ENERGY CONCEPT




Uncompromising. At FOCUS, the ride characteristics are the top priority. The new SHIMANO STEPS MTB generation of motors enabled the FOCUS engineers to develop a Tailored Energy System to suit your needs. The energy concept offers you an adjustable battery

capacity of up to 756 Wh – cleverly distributed over two equally powerful batteries. You choose the battery features that suit your requirements.




WITH THE TAILORED ENERGY CONCEPT (T.E.C.),
THERE ARE THREE POSSIBILITIES AVAILABLE TO YOU

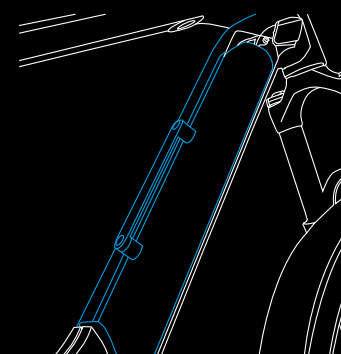


VERSION 1

Either you ride along as many trails as possible with only the beautifully integrated battery, and make the most of the benefits of a low centre of gravity and outstanding handling.

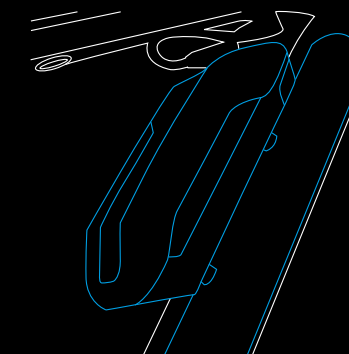

VERSION 2

Or you expand your SQUARED EXPERIENCE to include an additionally available battery (T.E.C. Pack). It can be fitted with ease and allows you to ride up and down trails even more often.

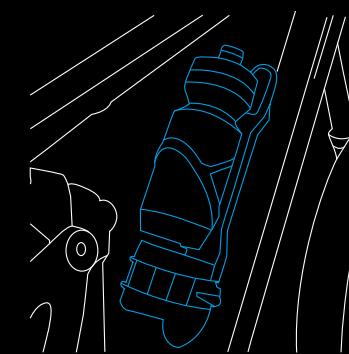

VERSION 3

You can also use an adapter (Smart Rack) to practically attach a bottle cage and equipment instead of the T.E.C. Pack.



378 Wh



378 Wh

INTEGRATED RECHARGEABLE BATTERY
FULL THROTTLE / HOME TRAILS / AGILE + LIGHT

**INTEGRATED RECHARGEABLE BATTERY + T.E.C. PACK
(REMOVABLE ADDITIONAL BATTERY)**
TOUR / WEEKEND / HOLIDAY




YOUR FAVOURITE TRAIL²

JAM² EXPERIENCE PROFILE



LISA'S LOCAL TOUR


Lisa weighs 63 kg and is a real biking enthusiast. She loves riding her JAM² in her free time, but also uses it to commute to work too. She incorporates easy trails into her ride time and time again. Most of the time she uses Eco mode, but she also switches to Trail mode too.



TEMPERATURE 18°C **BATTERY** INTERN (378WH)
DISTANCE 50 KM **MODE** ECO, TRAIL
ELEVATION GAIN 248 M **SPEED** 20 KM/H
DURATION 2 H 20 MIN **RESIDUAL CAPACITY**

CHRIS' TRAIL TOUR

Chris weighs 75 kg and is a mountain biker through and through. He's all about riding as many trails as possible – both uphill and downhill. He uses the assistance in a rather specific way. He rides in Eco, Trail or Boost mode depending on the situation, and occasionally also rides without any assistance too.



TEMPERATURE 0°C **BATTERY** INTERN (378WH)
DISTANCE 27,5 KM **MODE** MIXED (OFF, ECO, TRAIL, BOOST)
ELEVATION GAIN 1.000 M **SPEED** 15 KM/H
DURATION 1 H 51 MIN **RESIDUAL CAPACITY**

PHIL'S MOUNTAIN TOUR

Phil weighs 100 kg and is forever looking to make elevation gains. He loves conquering the mountains. For long mountain tours, he uses the T.E.C. Pack. While he certainly makes use of every trail opportunity that presents itself, he paces himself and makes economical use of the assistance too. And that's why he mainly rides in Eco mode.



TEMPERATURE 14°C **BATTERY** INTERN+ T.E.C. PACK (756WH)
DISTANCE 67 KM **MODE** ECO
ELEVATION GAIN 2.200 M **SPEED** 15 KM/H
DURATION 4 H 3 MIN **RESIDUAL CAPACITY**

MAXIMUM BIKE CONTROL IN EVERY SITUATION



F.O.L.D. · FOCUS OPTIMIZED LINKAGE DESIGN





The precise functioning of the rear suspension is crucial for the design of a full suspension bike. It has a significant impact on the ride characteristics of the bike and is its core component.

With its proprietary F.O.L.D. (FOCUS OPTIMIZED LINKAGE DESIGN) kinematics, FOCUS has developed and patented a rear triangle system that offers several advantages and can be used for all full-suspension FOCUS mountain bikes; Enduro, All-Mountain, Trail or Cross Country – it doesn't matter.

The design of F.O.L.D. is such that the suspension travel is divided into two phases. In the first phase, the characteristic curve of the rear triangle is degressive: the suspension responds extremely sensitively and absorbs even the smallest of bumps and dips, which produces the noticeable extra traction, compared to other rear triangle systems, that is typical of our F.O.L.D. system.

In the second phase, the characteristic curve is progressive in order to offer sufficient control even with stronger impacts, as well as prevent rim damage. Thanks to F.O.L.D., the suspension travel of the rear triangle feels longer than it is and ensures the rider has full control in any riding situation.

At FOCUS, we also use shocks that are specially tailored to the wheel, in order to tease the ultimate in performance from our bikes.

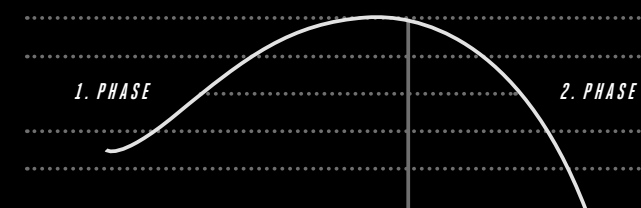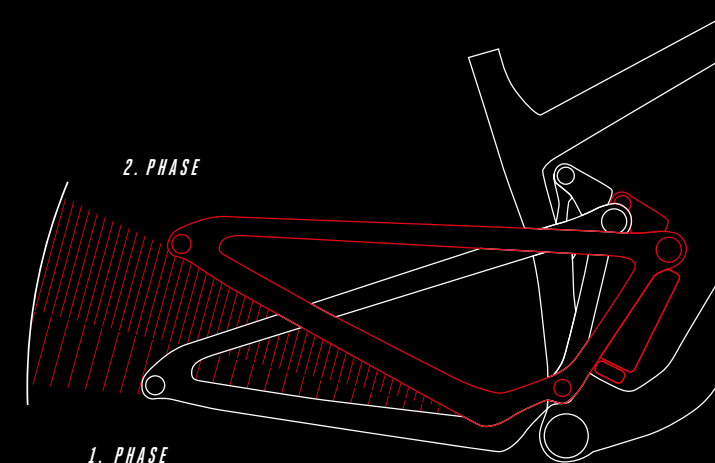

- SUPER SENSITIVE WITH AMPLE RESERVES OVER ROUGH TERRAIN – THANKS TO THE SOPHISTICATED DESIGN OF THE TWO-PHASE KINEMATICS

- SUPERB TRACTION, EVEN IN ROUGH CURVES – THANKS TO THE SPECIALLY CUSTOMISED CHASSIS FLEX

- WELL-BALANCED AND AGILE RIDE DYNAMICS – THANKS TO THE LOW AND CENTRAL POINT OF GRAVITY

"WHILE SMALL BUMPS AND DIPS ARE ABSORBED AS IF BY A SPONGE, THE SUSPENSION SYSTEM OFFERS IMPRESSIVE RESERVES, THANKS TO THE RESPECTIVE END PROGRESSION."

However, the perfect interplay of MAINLINK and GUIDELINK – the main components of F.O.L.D. – does not ensure the optimum functionality of the kinematics alone. A further key aspect is the chassis-flex of the rear triangle, already well-known from the world of motor sport.

The chassis flex is of huge importance: for example, the rear wheel often loses traction in rough curves because the suspension can only absorb vertical impacts. Thanks to the optimised F.O.L.D. stiffness of the rear triangle, the rear wheel is able to generate enough traction in spite of transverse impacts. Result: the bike offers a much gentler ride. The precise optimisation of the rear triangle is not just calculated at the computer, but is primarily the result of many test rides across a wide range of terrains. This deliberate chassis flex has been well established in the world of motor sport for many years and is a key component in the race to shave seconds off performances. With F.O.L.D., we use this knowledge to good effect – for you.

OPTIMISED RIDING DYNAMICS

Shocks, linkages and bearings are arranged as low and centrally as possible over the bottom bracket. The resulting low and central centre of gravity maximises dynamic and agile handling, without making the bike seem nervous – in particular when it comes to technically demanding terrain and curves. And this is one advantage of F.O.L.D. that you will feel after just a few metres in the saddle. All bearings are also arranged centrally in the main frame, protecting them against mud and dirt.

BIKES WITH F.O.L.D.

FOCUS SAM², JAM², JAM, FOCUS SAM, FOCUS 01E

GREATER COMFORT MEANS LESS FATIGUE

 **C.I.A.** · COMFORT IMPROVING AREAS



We are continuously developing new solutions for the perfect riding experience. Comfort has a considerable influence on the ride characteristics of your bike and significantly impacts your riding experience. In order to optimise that comfort, the FOCUS engineers have developed C.I.A. technology. Thanks to years of frame analyses, we have been able to identify and optimise key comfort points of the frameset, the so-called Comfort Improving Areas (C.I.A.).

Out and about on your bike, particularly on rough terrain, your bike and subsequently your body are subjected to constant vertical forces. Compensating these vertical

forces takes energy and depletes reserves you may need later during your ride. Our FOCUS engineers carried out finite element analyses (FEA) in order to find out how, and exactly where, these forces affect the frame and how the design of the frame could be adapted to increase comfort. This saw the development of not only comfort-enhancing tube cross-sections and forms, but also special frame designs capable of deflecting those forces and ensuring a smooth ride even on uneven ground.


KEY FACTOR – TUBE CROSS-SECTIONS

The forces caused by the terrain need to be absorbed by the rear triangle of the bike frame, which means the rear triangle needs to offer greater vertical flexibility. The three key areas are located at the seat stay, the chainstay and the seat tube. In the course of these analyses, it became clear that the optimum cross-section of the tubes in all three areas need to be as flat and as elliptical as possible.

As well as the seat stay offsetting these movements, your movement is also absorbed by the special design of the seat tube. At the same time, the butted tube shape in the transition to the bottom bracket increases the stiffness of the bracket, thus ensuring optimum power transmission.

Thanks to the interaction of these key areas, the frame absorbs the acting forces and offers significantly enhanced comfort. But we haven't just optimised the tube cross-section – we have designed the seat stay and chainstay so that they are concavely braced towards the rear triangle, which further enhances absorption of the vertically acting forces.

“BECAUSE VERTICAL FORCES FROM UNEVEN SURFACES AFFECT THE RIDER TOO, YOUR MOVEMENTS ALSO NEED TO BE OFFSET BY THE FRAME SET.”

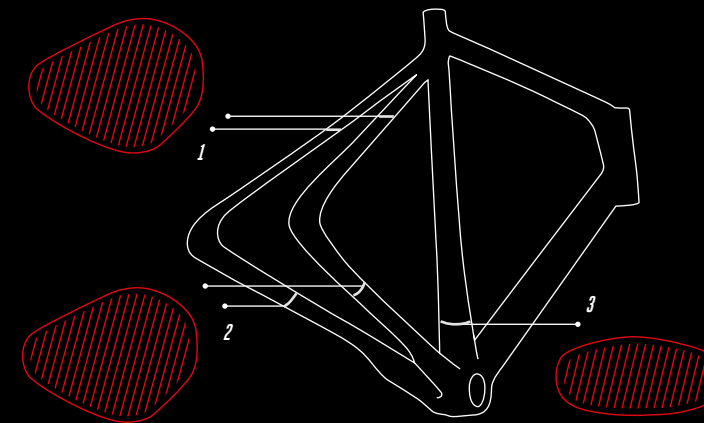

The images show the three areas and their unique tube cross-sections.

CROSS-SECTION 1 AND 2

The cross-sections of the chainstay become increasingly flatter towards the dropouts. This enables optimum absorption by the frame of any vertical forces from uneven surfaces.

CROSS-SECTION 3

Because vertical forces from uneven surfaces affect the rider too, your movements also need to be offset by the frame set, as otherwise your body's attempts to compensate these forces would similarly speed up the onset of fatigue. The central flattening of the seat stay absorbs these movements. The frame absorbs the forces, thus keeping you fresh and strong for longer.

BIKES WITH C.I.A.

RAVEN², PARALANE², RAVEN, PARALANE

THE FASTEST THRU-AXLE IN THE WORLD



R.A.T. · RAPID AXLE TECHNOLOGY



13,3
SECONDS

UNOFFICIAL
WORLD RECORD!

Disc brakes are both the present and future in cycling – and for their optimum function, floating axles are a must. Because no floating axle on the market met the demands that we place on a thru-axle system, our FOCUS engineers were galvanised into action and developed the Rapid Axle Technology (R.A.T.) – the fastest thru-axle in the world.

Disc brakes require the stiffness and stability of a thru-axle to ensure optimum function. Because no thru-axle system met our wheel change speed requirements, however, we developed our own patented Rapid Axle Technology (R.A.T.) for mountain bikes, racing bikes and Cyclo Cross bikes. Our development of the R.A.T. floating axle focussed on a quick and easy wheel change.

As a result, Rapid Axle Technology combines the stability and stiffness of a thru-axle and all the advantages of a quick-release. As the quickest and easiest wheel change system on the market, it puts even classic quick-release devices in the shade. Thanks to its outstanding features, even renowned competitors now rely on the R.A.T. thru-axle system for their disc models.

PROVEN IN THE RACING FIELD

The XC World Cup in Albstadt in 2016 demonstrated just how successfully our development goals were implemented. FOCUS XC team mechanic Fabian Haug changed the rear wheel of Florian Vogel's RAVEN in 13.3 seconds – an unofficial world record! The wheel change took a whole five seconds off the reigning record. The simple operation of the R.A.T. thru-axle enables an intuitive wheel change, even in stressful situations – such as bike racing.

BIKES WITH R.A.T.

PARALANE², RAVEN², FOCUS 01E, IZALCO MAX, RAVEN, IZALCO RACE, PARALANE, MARES

AWARDED THE EUROBIKE AWARD 2014

THE ADVANTAGES OF RAPID AXLE TECHNOLOGY

ABRASION-FREE ALIGNMENT OF THE DISC IN THE BRAKE BODY

ULTRA-QUICK WHEEL CHANGE

EXCELLENT STIFFNESS

MAXIMUM LIGHTWEIGHT

✕ MAX CARBON TECHNOLOGY



MAX Carbon Technology pushes the boundaries of lightweight construction: we use highly rigid high modulus carbon fibres in a fibre-based design to optimise the weight-to-stiffness ratio which, when coupled with our high-pressure moulding process,

achieves maximum strength and withstands test procedures significantly above the standard. This has enabled us to construct the world's lightest frame.

BATTERY AND MOTOR INTEGRATION WITH CARBON LIGHTWEIGHT TECHNOLOGY

✕ F.I.T. · FOCUS INTEGRATION TECHNOLOGY



System integration and lightweight design are key features of F.I.T. carbon. High-strength fibres are dimensioned in such a way that they offer stability, stiffness and minimum weight, all neatly packaged in an unusual and unique frame design. This has enabled

us to incorporate the battery and motor in an ultra-lightweight carbon frame. The intelligent solution for our pioneering E-Bikes.

SMART TECHNICAL DETAILS



≡ AIRFLOW

The AIRFLOW system provides optimal ventilation for the integrated battery and fresh, cool air flows through the Airflow Intakes into the down tube where the battery is installed. Heat produced is removed through this air flow via the down tube.

⇒ INTERNAL CABLE ROUTING

The cables and hydraulic lines are routed inside the frame for protection, creating a neat look and extending the service life of the lines for perfect gear shifting and braking at all times.



▧ STABLE STIFFNESS PER SIZE

In order to ensure that all bike sizes offer the same ride characteristics, all available frame heights are individually designed and feature a specially developed carbon lay-up. This Stable Stiffness Per Size (SSPS) production method ensures that all sizes provide the perfect weight-to-stiffness ratio.

THE PERFECT DRIVE SYSTEM
FOR YOUR SQUARED EXPERIENCE



SHIMANO
STOPS | MTB

COMPACT AND INTEGRATED
FOR MAXIMUM PERFORMANCE
OUT IN THE COUNTRYSIDE

Super-slim, full T.E.C. battery integration for a high level of stiffness, a low weight and outstanding weight distribution | Perfect geometry and kinematics due to compact motor design for maximum riding fun | Much shorter chainstays due to the drive shaft's position for more agile handling | Narrow Q factor for a real MTB riding experience | Highly dynamic performance of 70 Nm (max.) // 250 watts | Lightweight (under 3.2 kg)



FAZUA

SILENT AND RESISTANCE-FREE
FOR A NATURAL RIDING
EXPERIENCE

Very natural yet powerful assistance, with up to 400 watts | Natural transition to the 25 km/h threshold due to a decoupled gear unit | Resistance-free pedalling without power assist | Virtually silent assistance | Super-light, removable motor and battery unit | Powerful support for approx. two hours – and recharged in just two hours

MOTOR	CENTRE MOTOR, SHIMANO E8000 // 250 WATT // 70 NM	CENTRE MOTOR, FAZUA EVATION // 250 WATT // 55 NM
ASSISTANCE	up to 25 km / h	up to 25 km / h
ASSIST LEVEL	3 assist levels: ECO // TRAIL // BOOST	3 assist levels: GREEN // BLUE // PURPLE
BATTERY VERSIONS	756 Wh (2x 378Wh T.E.C.)	250 Wh
CHARGING TIME	approx. 3 hours per battery	approx. 2 hours
CHARGE CYCLES	1100 complete cycles	1100 complete cycles
DISPLAY	Shimano Display (E8000): compact, coloured, with Bluetooth	No display, coloured indication on the Evation Remote
CONTROLS	Shimano Firebolt Remote with the ergonomics and logic of a Shimano shifting lever	Evation Remote with indication using assistance and battery status



BOSCH

POWERFUL AND SMOOTH RUNNING
FOR A RELIABLE PERFORMANCE

Safe on the road with particularly robust motor unit | Gentle start-up behaviour for the comfort-conscious rider | Powerful 500 Wh battery | Powerful and smooth running with short charging times | Shift detection for smooth shifting processes



BOSCH

SMOOTH AND SILENT RUNNING
FOR A RELIABLE PERFORMANCE

Safe on the road with particularly robust motor unit | Gentle start-up behaviour for the comfort-conscious rider | Powerful 400 // 500 Wh battery | Smooth and silent running with short charging times | Shift detection for smooth shifting processes



GROOVE GO

SMALL AND EFFICIENT FOR
GREAT VERSATILITY


Direct feel due to compact hub engine | Smooth support for comfort-oriented riders | efficient 250 Wh battery | quiet and smooth running with short charging times | minimalistic integration at its best

CENTRE MOTOR, BOSCH PERFORMANCE CX, 250 WATT // 75 NM	CENTRE MOTOR, BOSCH ACTIVE // 250 WATT // 50 NM	HUB ENGINE // GROOVE GO, 250 WATT // 32 NM
up to 25 km / h	up to 25 km / h	up to 25 km / h
4 assist levels: ECO // TOUR // SPORT // TURBO	4 assist levels: ECO // TOUR //SPORT // TURBO	4 assist levels: ECO // TOUR //SPORT // TURBO
500 Wh	400 Wh // 500 Wh	250 Wh
up to 5 hours	up to 5 hours	up to 4 hours
1100 complete cycles	1100 complete cycles	1100 complete cycles
Bosch Intuvia, Bosch Purion	Bosch Intuvia, Bosch Purion	LED in the top tube
Control panel with pushing assistance	Control panel with pushing assistance	Control panel with pushing assistance

E-BIKE
RANGE OVERVIEW

E-MTB FULLY		E-MTB HARDTAIL				E-ROAD	E-ALLROUND				JUNIOR & KIDS	
FOCUS SAM² ENDURO		JAM² ALL-MOUNTAIN	RAVEN² RACE	JAM² HT TRAIL	JARIFA² TOURING & SPORT	WHISTLER² EVERYDAY & FITNESS	PARALANE² ENDURANCE	PLANET² CITY	PLANET² CITY	AVENTURA² TREKKING	AVENTURA² TREKKING	JAM² HT JUNIOR TRAIL
												
MODEL	6.9/6.8/6.7	NINE: 9.9/9.6/6.8/6.7 PLUS: 9.7/9.6/6.8/6.7 DRIFTER: 9.8/6.9	9.9/9.8	NINE: 6.9/6.8 PLUS: 6.9/6.8 SEVEN: 6.8	PLUS: 6.9/6.8/6.7/3.8 6.9/6.8/6.7	3.9/ Integrated/ Integrated EQP	6.9/6.8 9.9/9.7/9.6	9.8	6.8/6.7	9.8	6.8/6.7	3.8 Junior
MOTOR	Shimano Steps MTB (E 8000)	Shimano Steps MTB (E 8000)	FAZUA Evation	Shimano Steps MTB (E 8000)	Bosch Performance CX, Bosch Active Plus	Groove Go	FAZUA Evation	Shimano Steps MTB (E 8000)	Bosch Performance CX Bosch Performance	Shimano Steps MTB (E 8000)	Bosch Performance CX Bosch Performance	Shimano Steps MTB (E 8000)
BATTERY	FOCUS T.E.C. 756Wh	FOCUS T.E.C. 756Wh	FAZUA Evation 250Wh	FOCUS T.E.C. 756Wh	BOSCH POWERTUBE 500Wh	Grove Go 250Wh	FAZUA Evation 250Wh	FOCUS T.E.C. 756Wh	Bosch Powertube 500Wh	FOCUS T.E.C. 756Wh	Bosch Powertube 500Wh	FOCUS T.E.C. 378Wh
FRAME	ALUMINUM	ALUMINUM CARBON	CARBON	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM CARBON	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
HIGHLIGHTS	F.O.L.D., T.E.C., AIRFLOW	F.O.L.D., T.E.C., AIRFLOW	F.I.T., C.I.A., R.A.T.	T.E.C., Airflow, Fender and Kickstandmount	Mountingpossibility for Fender and Kickstands	Mountingpossibility for Fender and Kickstands	F.I.T., C.I.A., R.A.T. Road Boost	T.E.C., Airflow, Fender and Kickstandmount	Fender, Light and Kickstandmount	T.E.C., Airflow, Fender and Kickstandmount	Light	Airflow, low standover height
WHEELSIZE	27,5"	29"/27,5+	29"	27,5"(XS/S)/ 29"/ 27,5+	27,5" (XS / S) / 29"	27,5"/ 29"/ 27,5+	28"	27,5+	28"	27,5+	28"	26"

E-MTB
FULLY

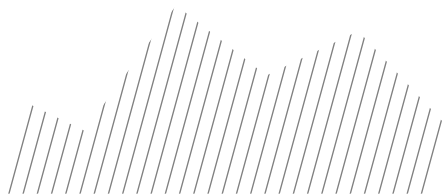

ALL-MOUNTAIN



ENDURO



JAM²



FOCUS SAM²



FOCUS SAM² Pro, Olly Wilkins, Joe Connell (SI)

CONQUER NEW MOUNTAINS
MORE MOUNTAINS,
MORE TRAILS,
MORE EXCITEMENT



TOP FEATURES



AIRFLOW



F.O.L.D.
FOCUS OPTIMIZED LINKAGE DESIGN



S.S.P.S.
STABLE STIFFNESS PER SIZE



T.E.C.
TAILORED ENERGY CONCEPT

JAM²

- 150 MM SUSPENSION TRAVEL
- F.O.L.D. FULL SUSPENSION
- 27+, 29" OR 29"/27+ (DRIFTER) WHEELS/TYRES

ALWAYS
AS MUCH ENERGY AS
YOU NEED

The easy-to-install TEC pack puts up to 756 Wh at your disposal for those longer tours. Pack your equipment on the smart rack and store your bottle on the down tube. You can tailor your bike to your own requirements.

OPTIMUM SUSPENSION
PERFORMANCE FOR EVERY
SITUATION

Our F.O.L.D. chassis is specially designed to meet the very high demands of an E-MTB. So we can guarantee that our E-All-Mountain JAM² is also the perfect combination: F.O.L.D. is extremely sensitive while being progressive enough to prevent a harsh bottom out.

IT'S THE RIDE
CHARACTERISTICS
THAT COUNT

Thanks to the compact design of the Shimano E8000 motor and our battery, we were able to create a modern, agile and aggressive geometry for the JAM². This ensures that you have just as much fun on the trail as with our JAM without assistance.

SIZE	S	M	L	XL
WHEEL SIZE	29"/27.5" +	29"/27.5" +	29"/27.5" +	29"/27.5" +
SEAT TUBE LENGTH	410	440	470	500
TOP TUBE LENGTH	584	604	624	649
HEAD TUBE ANGLE	65,6	65,6	65,6	65,6
SEAT TUBE ANGLE	73,6	73,6	73,6	73,6
CHAIN STAY LENGTH	457	457	457	457
BB DROP	18	18	18	18
HEAD TUBE LENGTH	120	120	140	160
FORK LENGTH	557	557	557	557
FORK RAKE	51	51	51	51
WHEEL BASE	1188	1204	1219	1250
STACK	624	624	634	652
REACH	405	425	440	455

Example: JAM² 6.9 DRIFTER

JAM² ALL-MOUNTAIN



JAM² 9.9 NINE

Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic	FOX 34 Float Factory, 3-position remote w/ open mode, 15 mm QR, 150 mm travel	FOX Float DPS Factory, 3-position lever, 210x55 mm, hardware: 25,0 x 8mm, custom tune	DT Swiss HXC 1200 SPLINE 30



JAM² 9.8 DRIFTER

Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic	DT Swiss Hybrid F535 One, 110x15 mm QR, 150mm travel	DT Swiss Hybrid R535 One, 210 / 55 mm, Hardware: 25,0 x 8 mm, custom tune	DT Swiss H1501 Spline One, rear: 584-35, front: 622-30, 148x12 mm / 100x15 mm



JAM² 9.7 PLUS

Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic	FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel	FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AFFECT PLUS, 584-40, 148x12 mm / 110x15 mm



JAM² 9.6 PLUS

Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic	RockShox Revelation RC, 110x15 mm QR, 150 mm travel	RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm



JAM² 9.6 NINE

Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic	RockShox Revelation RC, 110x15 mm QR, 150 mm travel	RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AR30, 622-30, Novatec, 148x12 mm / 110x15 mm



JAM² 6.9 DRIFTER

7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle	FOX 36 Float Performance, 3-position micro adjust lever, 110x15 mm mm QR, 150 mm travel	FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Mavic E-XA Drifter [29" Front, 27,5" + rear]



JAM² 6.8 PLUS

7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic	FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel	FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm



JAM² 6.8 NINE

7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle	FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel	FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AFFECT R, 622-30, 148x12 mm / 110x15 mm



JAM² 6.7 PLUS

7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle	RockShox Recon RL, 110x15 mm QR, 140 mm travel	RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm



JAM² 6.7 NINE

7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing	RockShox Recon RL, 110x15 mm QR, 140 mm travel	RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AR30, 622-30, Novatec, 148x12 mm / 110x15 mm



Black/Red

JAM² 9.9 NINE

WHEELSIZE	29	29	29
SIZE / CM	S / 41	M / 44	L / 47
ARTICLE NO. EU / BLK	633514030	633514031	633514032



Petrol

JAM² 9.8 DRIFTER

WHEELSIZE	DRIFTER	DRIFTER	DRIFTER
SIZE / CM	S / 41	M / 44	L / 47
ARTICLE NO. EU / PTL	633514040	633514041	633514042

- Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- Fox 34 Float Factory, 3-position remote w/open mode, 15 mm QR, 150 mm travel
- Fox Float DPS Factory, 3-position lever, 210x55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano XTR 9100, 12-speed
- Shimano XTR 9100, 12-speed
- Shimano XTR 9100, 12-speed, 10-51T
- FC-E8050-34T Hollow
- RaceFace Next R 35, carbon, 800mm, rise: 10mm, backsweep: 8degree
- RaceFace Turbine R, 50 mm
- Acros AIX-322 R1
- Prologo Dimension 143 Carbon
- Fox Transfer Factory, 31.6 mm
- Shimano XTR 9120 [4-piston], 203 mm / 180 mm
- DT Swiss HXC 1200 SPLINE 30
- Maxxis Rekon 2.6 3C EXO TR
- Black/Red

- Carbon front triangle, 7005 Aluminium rear triangle, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- DT Swiss Hybrid F535 One, 110x15 mm QR, 150mm travel
- DT Swiss Hybrid R535 One, 210 / 55 mm, Hardware: 25,0 x 8 mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano SW-E-8000
- Shimano Deore XT 8050, Di2, 11-speed
- Shimano XT 8000, 11-46T, 11-speed
- FC-E8050-34T Hollow
- BBB, Aluminium, Di2, riserbar, 780mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminium, Di2, 31.8 mm, 55 mm
- Acros AIX-322 R1
- Prologo Dimension NDR
- Fox Transfer Performance, 31.6 mm
- Shimano Deore XT 8020, 200mm / 200 mm
- DT Swiss H1501 Spline One, rear: 584-35, front: 622-30, 148x12 mm / 100x15 mm
- Maxxis Ardent 2.4 3C EXO TR
- Maxxis Rekon 2.8 3C EXO TR
- Petrol

JAM² ALL-MOUNTAIN



Black/Lime

JAM² 9.7 PLUS

WHEELSIZE	27	27	27
SIZE / CM	S / 41	M / 44	L / 47
ARTICLE NO. EU / GRY	633514050	633514051	633514052
ARTICLE NO. EU / BLK	633514055	633514056	633514057

- Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel
- FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano SW-E-8000
- Shimano Deore XT 8050, Di2, 11-speed
- Shimano SLX 11S, 11-46T
- FC-E8050-34T Hollow
- BBB, Aluminum, Di2, flatbar, 760mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AIX-322 R1
- FOCUS Trail Saddle
- FOX Transfer Performance, 31.6 mm
- Shimano Deore XT 8020, 200mm / 200 mm
- Race Face AFFECT PLUS, 584-40, 148x12 mm / 110x15 mm
- Maxxis Rekon 2.8 3C EXO TR
- Maxxis Rekon 2.8 Dual EXO TR
- Black/Lime, Grey



Grey

JAM² 9.6 NINE

WHEELSIZE	29	29	29
SIZE / CM	S / 41	M / 44	L / 47
ARTICLE NO. EU / PTL	633514080	633514081	633514082
ARTICLE NO. EU / GRY	633514085	633514086	633514087

- Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RockShox Revelation RC, 110x15 mm QR, 150 mm travel
- RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FC-E8050-34T Hollow
- BBB, Aluminum, Di2, flatbar, 760mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AIX-322 R1
- FOCUS Trail Saddle
- KindShock E30i, 31,6mm, internal
- Shimano BR-M520, 200 mm / 200 mm
- Race Face AR30, 622-30, Novatec, 148x12 mm / 110x15 mm
- Maxxis Rekon 2.6 3C EXO TR
- Grey, Petrol



Grey

JAM² 9.6 PLUS

WHEELSIZE	27	27	27
SIZE / CM	S / 41	M / 44	L / 47
ARTICLE NO. EU / GRY	633514070	633514071	633514072
ARTICLE NO. EU / PTL	633514075	633514076	633514077

- Carbon front triangle, 7005 Aluminum rear triangle, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RockShox Revelation RC, 110x15 mm QR, 150 mm travel
- RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FC-E8050-34T Hollow
- BBB, Aluminum, Di2, flatbar, 760mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AIX-322 R1
- FOCUS Trail Saddle
- KindShock E30i, 31,6mm, internal
- Shimano BR-M520, 200 mm / 200 mm
- Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm
- Maxxis Rekon 2.8 3C EXO TR
- Maxxis Rekon 2.8 Dual EXO TR
- Grey, Petrol



Petrol

JAM² 6.9 DRIFTER

WHEELSIZE	DRIFTER	DRIFTER	DRIFTER	DRIFTER
SIZE / CM	M / 44	L / 47	XL / 50	S / 41
ARTICLE NO. EU / PTL	633514101	633514102	633514103	633514100

- 7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- FOX 36 Float Performance, 3-position micro adjust lever, 110x15 mm mm QR, 150 mm travel
- FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- SRAM GX Eagle
- SRAM GX
- Sram PG-1230 Eagle, 10-50T
- FC-E8050-34T Hollow
- BBB, Aluminum, Di2, riserbar, 780mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AXZ-212 R5AH
- Prologo Dimension NDR
- KindShock E30i, 31,6mm, internal
- Magura MT Trail Sport, 203 mm / 203 mm
- Mavic E-XA Drifter (29" Front, 27,5" + rear)
- Maxxis DHF 2.6 3C EXO TR
- Maxxis DHR 2.8 Dual EXO TR
- Petrol

JAM² ALL-MOUNTAIN



Grey

JAM² 6.8 PLUS

WHEELSIZE	27	27	27	27
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / PTL	633514120	633514121	633514122	633514123
ARTICLE NO. EU / GRY	633514125	633514126	633514127	633514128

- 7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel
- FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- Shimano FC-E8000, 34T
- BBB, Aluminum, Di2, flatbar, 760mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail Saddle
- KindShock E30i, 31,6mm, internal
- Shimano BR-M520, 200 mm / 200 mm
- Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm
- Maxxis Rekon 2.8 3C EXO TR
- Maxxis Rekon 2.8 Dual EXO TR
- Grey, Petrol



Black/Lime

JAM² 6.7 PLUS

WHEELSIZE	27	27	27	27
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / BLK	633514140	633514141	633514142	633514143
ARTICLE NO. EU / GRY	633514145	633514146	633514147	633514148

- 7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RockShox Recon RL, 110x15 mm QR, 140 mm travel
- RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano Deore M6000
- Shimano Deore M6000, 10-speed
- Shimano HG500 10-speed, 11-42T
- FC-E8000-34T
- BBB, Aluminum, Di2, flatbar, 760mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail Saddle
- JD low dropper YSP 15, 31.6 mm, internal
- Magura MT5 (vorne) / MT4 (hinten), 203 mm / 203 mm
- Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm
- Maxxis Rekon 2.8 3C EXO TR
- Maxxis Rekon 2.8 Dual EXO TR
- Black/Lime, Grey



Grey

JAM² 6.8 NINE

WHEELSIZE	29	29	29	29
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / PTL	633514110	633514111	633514112	633514113
ARTICLE NO. EU / GRY	633514115	633514116	633514117	633514118

- 7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel
- FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- Shimano FC-E8000, 34T
- BBB, Aluminum, Di2, flatbar, 760mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail Saddle
- KindShock E30i, 31,6mm, internal
- Shimano BR-M520, 200 mm / 200 mm
- Race Face AFFECT R, 622-30, 148x12 mm / 110x15 mm
- Maxxis Rekon 2.6 3C EXO TR
- Maxxis Rekon 2.6 Dual EXO TR
- Grey, Petrol



Black/Lime

JAM² 6.7 NINE

WHEELSIZE	29	29	29	29
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / BLK	633514130	633514131	633514132	633514133
ARTICLE NO. EU / GRY	633514135	633514136	633514137	633514138

- 7005 hydroformed Aluminum, 3D forging, 150 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RockShox Recon RL, 110x15 mm QR, 140 mm travel
- RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano Deore M6000
- Shimano Deore M6000, 10-speed
- Shimano HG500, 11-42T
- FC-E8000-34T
- BBB, Aluminum, Di2, flatbar, 760mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail Saddle
- JD low dropper YSP 15, 31.6 mm, internal
- Magura MT5 (vorne) / MT4 (hinten), 203 mm / 203 mm
- Race Face AR30, 622-30, Novatec, 148x12 mm / 110x15 mm
- Maxxis Rekon 2.6 3C EXO TR
- Maxxis Rekon 2.6 Dual EXO TR
- Black/Lime, Grey

REDISCOVER ENDURO

BACK TO THE
ENDURO CORE



TOP FEATURES


F.O.L.D.
FOCUS OPTIMIZED LINKAGE DESIGN


AIRFLOW


T.E.C.
TAILORED ENERGY CONCEPT

FOCUS SAM²

- 170 MM SUSPENSION TRAVEL
- F.O.L.D. FULL SUSPENSION
- 27,5" WHEELS

ALWAYS
AS MUCH ENERGY AS
YOU NEED

The new and easy-to-install TEC pack puts up to 756 Wh at your disposal for those longer tours. Pack your equipment on the smart rack and store your bottle on the down tube. You can tailor your bike to your own requirements.

OPTIMUM SUSPENSION
PERFORMANCE FOR EVERY
SITUATION

Our F.O.L.D. chassis is specially designed to meet the very high demands of an E-MTB. So we can guarantee that our E-Enduro FOCUS SAM² is also the perfect combination: F.O.L.D. is extremely sensitive while being progressive enough to prevent a harsh bottom out.

IT'S THE RIDE
CHARACTERISTICS
THAT COUNT

Thanks to the compact design of the Shimano E8000 motor and our battery, we were able to create a modern, agile and aggressive geometry for the FOCUS SAM². This ensures that you have just as much fun on the trail as with our FOCUS SAM without assistance.

SIZE	S	M	L
WHEEL SIZE	27.5"	27.5"	27.5"
SEAT TUBE LENGTH	420	440	480
TOP TUBE LENGTH	585	604	624
HEAD TUBE ANGLE	65	65	65
SEAT TUBE ANGLE	75	75	75
CHAIN STAY LENGTH	455	455	455
BB DROP	12	12	12
HEAD TUBE LENGTH	118	118	138
FORK LENGTH	562	562	562
FORK RAKE	42	42	42
WHEEL BASE	1196	1217	1240
STACK	607	607	625
REACH	425	440	455

Example: FOCUS SAM² 6.9

FOCUS
SAM² ENDURO



7005 hydroformed Aluminum, 3D forging, 170 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing	RockShox Lyrik RC2, 15x110mm QR, 170 mm travel	RockShox Super Deluxe RC3, 230x65 mm, Hardware: 25,0x8 mm, custom tune	Race Face Turbine 584-30, 148x12 mm / 110x15 mm	7005 hydroformed Aluminum, 3D forging, 170 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing	FOX 36 Performance Elite, 3-position micro adjust lever, 110x15 mm mm QR, 170 mm travel	Fox Float DPS Performance EVOL	DT-Swiss H1900, 27,5" 584-30, 148x12 mm / 110x15 mm	7005 hydroformed Aluminum, 3D forging, 170 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing	RockShox Yari RC, 110x15 mm QR, 170 mm travel	RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Race Face AR30, 584-30, Novatec, 148x12 mm / 110x15 mm



FOCUS SAM² 6.9

WHEELSIZE	27	27	27
SIZE / CM	S / 42	M / 44	L / 48
ARTICLE NO. EU / OLI	633514000	633514001	633514002

- 7006 hydroformed Aluminum, 3D forging, 170 mm F.O.L.D. Kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RockShox Lyrik RC2, 15x110mm QR, 170 mm travel
- RockShox Super Deluxe RC3, 230 / 65 mm, Hardware: 25.0 x 8 mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- SRAM GX Eagle
- SRAM GX Eagle, 12-speed
- SRAM PG-1230 Eagle, 10-50T
- FC-E8050-34T Hollow
- BBB, Aluminum, Di2, riserbar, 780mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros BlockLock
- FOCUS Trail Saddle
- RockShox Reverb Stealth 31.6
- SRAM Code RSC
- Race Face Turbine 584-30, 148x12 mm / 110x15 mm
- Maxxis DHF 2.6 3C EXO TR
- Maxxis DHR II 2.6 Dual EXO TR
- Olive / Orange



FOCUS SAM² 6.8

WHEELSIZE	27	27	27
SIZE / CM	S / 42	M / 44	L / 48
ARTICLE NO. EU / GRY	633514010	633514011	633514012
ARTICLE NO. EU / RED	633514015	633514016	633514017

- 7006 hydroformed Aluminum, 3D forging, 170 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- FOX 36 Performance Elite, 3-position micro adjust lever, 110x15 mm QR, 170 mm travel
- FOX Float DPS Performance EVOL
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FC-E8050-34T Hollow
- BBB, Aluminum, Di2, riserbar, 780mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros BlockLock
- FOCUS Trail Saddle
- KindShock E30i, 31,6mm, internal
- Shimano Zee BR-M640
- DT-Swiss H1900, 27,5" 584-30, 148x12 mm / 110x15 mm
- Maxxis DHF 2.6 3C EXO TR
- Maxxis DHR II 2.6 Dual EXO TR
- Grey / Blue, Red



FOCUS SAM² 6.7

WHEELSIZE	27	27	27
SIZE / CM	S / 42	M / 44	L / 48
ARTICLE NO. EU / GRY	633514020	633514021	633514022
ARTICLE NO. EU / RED	633514025	633514026	633514027

- 7006 hydroformed Aluminum, 3D forging, 170 mm F.O.L.D. kinematic, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RockShox Yari RC, 110x15 mm QR, 170 mm travel
- RockShox Deluxe R, 210 / 55 mm, hardware: 25.0 x 8mm, custom tune
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- SRAM NX Eagle
- SRAM NX, 12-speed
- SRAM PG-1230 Eagle, 10-50T
- FC-E8000-34T
- BBB, Aluminum, Di2, riserbar, 780mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros BlockLock
- FOCUS Trail Saddle
- KindShock E30i, 31,6mm, internal
- Magura MT5
- Race Face AR30, 584-30, Novatec, 148x12 mm / 110x15 mm
- Maxxis DHF 2.6 3C EXO TR
- Maxxis DHR II 2.6 Dual EXO TR
- Grey / Blue, Red

*E - MTB
HARDTAIL*



CROSS-COUNTRY



RAVEN²



EVERYDAY & FITNESS



WHISTLER²




TOURING & SPORT



JARIFA²



TRAIL

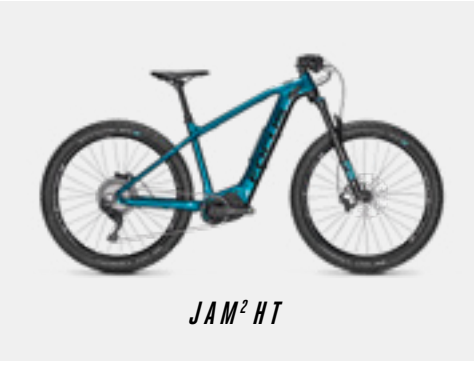

JAM² HT



Stephanie Teltscher, JARIFA², Ludwigsburg (DE)

BREAKS RECORDS

THE FIRST
E-RACING BIKE



TOP FEATURES



C.I.A.
COMFORT IMPROVING AREAS



S.S.P.S.
STABLE STIFFNESS PER SIZE



R.A.T.
RAPID AXLE TECHNOLOGY



F.I.T.
FOCUS INTEGRATION TECHNOLOGY

RAVEN²

- 100 MM SUSPENSION FORK AND 29" WHEELS
- HOLDS THE TRACK RECORD FOR THE CLASSIC TRANSALP ROUTE
- EXTREMELY LIGHTWEIGHT E-MTB THAT OFFERS A GREAT RIDE EVEN WITHOUT BATTERY ASSISTANCE

IT'S THE RIDE
CHARACTERISTICS
THAT COUNT

The RAVEN² is unbelievably light and perfectly balanced. A real race bike – that offers a great ride even without battery assistance because there is no motor-related pedal resistance.

RACE POWER
EVERY DAY

With an extra 250 Wh under the saddle, you get a real World Cup feeling that sweetens any ride. This will ensure that all your efforts are channelled directly into speed and flow.

GREATER COMFORT MEANS
LESS FATIGUE

Careful attention has been paid to the lay of the fibres and the pipe dimensions of the seat tube, seat stays, bottom bracket and headset – as rigid as necessary, as comfortable as possible.

SIZE	S	M	L
WHEEL SIZE	29"	29"	29"
SEAT TUBE LENGTH	420	460	500
TOP TUBE LENGTH	592	608	629
HEAD TUBE ANGLE	69,8	69,8	69,8
SEAT TUBE ANGLE	74,5	74,5	74,5
CHAIN STAY LENGTH	435	435	435
BB DROP	68	68	68
HEAD TUBE LENGTH	104	107	130
FORK LENGTH	501	501	501
FORK RAKE	44	44	44
WHEEL BASE	1100	1116	1139
STACK	620	623	644
REACH	420	435	450

Example: RAVEN² 9.9

RAVEN² RACE



F.I.T. Technology Carbon frame, 148x12 mm through axle, internal cable routing, Post Mount 160 mm	RockShox SID RL, 15 mm QR, Oneloc remote, 100mm travel	Shimano Deore XT 8000, 11-speed	DT Swiss M1650, 622-25, 148x12 mm / 110x15 mm	F.I.T. Technology Carbon frame, 148x12 mm through axle, internal cable routing, Post Mount 160 mm	FOX 32 Rhythm, 2-position remote, 110x15 mm QR, 100 mm travel	Shimano Deore XT 8000, 11-speed	Rodi Ready 27, 622-27, Novatec, 148x12 mm / 110x15 mm



Black / Red
RAVEN² 9.9

WHEELSIZE	29	29	29
SIZE / CM	S / 42	M / 46	L / 50
ARTICLE NO. EU / BLK	633618000	633618001	633618002

- F.I.T. Technology Carbon frame, 148x12 mm through axle, internal cable routing, Post Mount 160 mm
- RockShox SID RL, 15 mm QR, Oneloc remote, 100mm travel
- FAZUA evation, 60 Nm, 250 W
- FAZUA evation, 250 Wh, removeable
- FAZUA evation 1.0 remote
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano XT 8000, 11-46T, 11-speed
- FSA Hollow Carbon, direct mount
- BBB, carbon, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- Prologo Scratch X8, 7x9mm carbon rail
- BBB, carbon, 27.2 mm
- Shimano Deore XT M8000, 180 mm / 160 mm
- DT Swiss M1650, 622-25, 148x12 mm / 110x15 mm
- Schwalbe Racing Ralph Evo Addix Speed 2.25
- Schwalbe Racing Ray Evo Addix Speedgrip 2.25
- Black/Red



Blue
RAVEN² 9.8

WHEELSIZE	29	29	29
SIZE / CM	S / 42	M / 46	L / 50
ARTICLE NO. EU / BLU	633618010	633618011	633618012

- F.I.T. Technology Carbon frame, 148x12 mm through axle, internal cable routing, Post Mount 160 mm
- FOX 32 Rhythm, 2-position remote, 110x15 mm QR, 100 mm travel
- FAZUA evation, 60 Nm, 250 W
- FAZUA evation, 250 Wh, removeable
- FAZUA evation 1.0 remote
- Shimano SLX 7000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FSA Alu
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- Prologo Scratch X8
- BBB, carbon, 27.2 mm
- Shimano SLX BR-M7000, 180 mm / 160 mm
- Rodi Ready 27, 622-27, Novatec, 148x12 mm / 110x15 mm
- Schwalbe Nobby Nic Evo Addix Speedgrip, 2.25"
- Schwalbe Racing Ray Performance 2.25
- Blue

*Subject to change



SUPPORTS YOUR LIFESTYLE

THE FAST AND
STRESS-FREE WAY TO GET
FROM A TO B



WHISTLER²

- 100 MM SUSPENSION FORK
- 27,5" AND 29" WHEELS
- MORE FUN FOR RECREATIONAL RIDERS

LESS IS MORE

Keep it simple, no overcomplications.
That is your maxim. And that is why we have
kept the WHISTLER² as simple as possible.
Switch on and go!

EXPERIENCE EVEN MORE
WITH THE SAME EFFORT

Your everyday is chock-a-block – so every
minute for your hobby counts. The WHISTLER²
makes getting from A to B a quick and easy.
252 Wh takes the stress out of biking.

CONSISTENT BRAKE
PERFORMANCE

You need a reliable partner to handle
hairy situations. That's why we've equipped
our WHISTLER² model with disc brakes –
for a consistent braking performance and
optimum braking behaviour.

SIZE	S	M	L	XL
WHEEL SIZE	29"	29"	29"	29"
SEAT TUBE LENGTH	400	440	480	520
TOP TUBE LENGTH	563	586	611	637
HEAD TUBE ANGLE	69	69	69	69
SEAT TUBE ANGLE	74	74	74	74
CHAIN STAY LENGTH	455	455	455	455
BB DROP	62	62	62	62
HEAD TUBE LENGTH	100	110	130	150
FORK LENGTH	516	516	516	516
FORK RAKE	46	46	46	46
WHEEL BASE	1097	1120	1147	1175
STACK	621	630	649	669
REACH	385	405	425	445

Example: WHISTLER² 6.9 EQP / 6.9

WHISTLER² EVERYDAY & FITNESS



WHISTLER² 6.9 EQP



WHISTLER² 6.9



WHISTLER² 3.9

6061 Aluminum, BSA BB, international Disc brake standard	RockShox XC30 TK silver, 100 mm travel	Shimano Deore XT 781, 10-speed	Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR	6061 Aluminum, BSA BB, international Disc brake standard	RockShox XC30 TK silver, 100 mm travel	Shimano Deore XT 781, 10-speed	Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR	6061 Aluminum, BSA BB, international disc brake standard	SR Suntour XCM RL, 9 mm QR	Shimano Altus M2000	Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR



Green

WHISTLER² 6.9 EQP

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / RED	633617010	633617011	633617012	633617013
ARTICLE NO. EU / BLK	633617015	633617016	633617017	633617018
ARTICLE NO. EU / GRN	633617040	633617041	633617042	633617043

	6061 Aluminum, BSA BB, international Disc brake standard
	SR Suntour XCM RL, 9 mm QR
	Groove Go, 250 W
	Groove Next, removeable, 252 Wh
	Shimano Altus M2000
	Shimano Altus M2000
	Shimano HG-200, 11-36T
	Samox AF-38, 34T
	Sport Riser, Aluminum, risebar, 700 mm, rise: 20mm
	Aluminum, 90mm, 31,8mm
	VP Components
	FOCUS Sport Saddle
	Sport Components SP-DC1, 27.2x350 mm
	Shimano BR-MT200, 160 mm / 160mm
	Rodi Viper 21, 29" 622-21, Shimano DH3D37, 9mm QR
	Schwalbe Rapid Rob 2.25"
	Hebie Viper 64 mm
	Axa Blueline 30 Lux
	Büchel Beetle
	Black, Green, Red



Red

WHISTLER² 6.9

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / RED	633617020	633617021	633617022	633617023
ARTICLE NO. EU / BLK	633617025	633617026	633617027	633617028
ARTICLE NO. EU / GRN	633617030	633617031	633617032	633617033

	6061 Aluminum, BSA BB, international Disc brake standard
	SR Suntour XCM RL, 9mm QR
	Groove Go, 250 W
	Groove Next, removeable, 252 Wh
	Shimano Altus M2000
	Shimano Altus M2000
	Shimano HG-200, 11-36T
	Samox AF-38, 34T
	Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
	Aluminum, 31.8mm
	VP Components
	FOCUS Sport Saddle
	Sport Components SP-DC1, 27.2x350 mm
	Shimano BR-MT200, 160 mm / 160mm
	Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
	Schwalbe Rapid Rob 2.25"
	Hebie Viper 64 mm
	Black, Green, Red



Black / Lime

WHISTLER² 3.9

WHEELSIZE	27	27	29	29	29	29
SIZE / CM	XS / 38	S / 42	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / BLK	633617000	633617001	633617002	633617003	633617004	633617005

	6061 Aluminum, BSA BB, international disc brake standard
	SR Suntour XCM RL, 9 mm QR
	Shimano Altus M2000
	Shimano Altus M2000
	Shimano HG200, 11-36T
	Samox AF38, 34T
	Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
	Aluminum, 31.8mm
	VP Components
	FOCUS Sport Saddle
	Sport Components SP-DC1, 27.2x350 mm
	Shimano BR-MT200, 180 mm / 160 mm
	Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
	Schwalbe Rapid Rob 2.25
	Black/Lime

INSPIRES YOU TO GET AWAY

EXTRA POWER ON EVERY
TOUR



TOP FEATURES



INTERNAL
CABLE ROUTING

RIDE BEYOND

JARIFA²

- 100 MM SUSPENSION FORK
- 27+ OR 27,5" AND 29" WHEELS/TYRES
- INTEGRATED LIGHTING SYSTEM

THE CHOICE
IS YOURS

You can choose from a range of different wheel sizes to best suit your individual requirements. Furthermore, the battery is removable on all models to enable easy charging in the comfort of your home.

PREPARED
FOR ANYTHING

The integrated lighting system from Supernova on your handlebar not only looks cool, it will get you safely through the dark.

IT'S THE RIDE
CHARACTERISTICS
THAT COUNT

The path to your ultimate goal should be full of laughter and fun. Which is why our JARIFA² is designed with mountain bike geometry and excellent off-road capability.

SIZE	XS	S	S	M	L	XL
WHEEL SIZE	27.5"	27.5"	29"	29"	29"	29"
SEAT TUBE LENGTH	360	400	400	440	480	520
TOP TUBE LENGTH	554	567	578	588	608	623
HEAD TUBE ANGLE	69	69	70	70	70	70
SEAT TUBE ANGLE	73,5	73,5	74	74	74	74
CHAIN STAY LENGTH	475	475	490	490	490	490
BB DROP	48	48	60	60	60	60
HEAD TUBE LENGTH	120	130	120	120	140	160
FORK LENGTH	489	489	509	509	509	509
FORK RAKE	42	42	51	51	51	51
WHEEL BASE	1106	1120	1145	1155	1177	1194
STACK	604	614	636	636	655	674
REACH	375	385	395	405	420	430

Example: JARIFA² 6.9



JARIFA² TOURING AND SPORT



JARIFA² 6.9 PLUS

6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm	SR Suntour Raidon Air, 100x15mm, 100mm travel	Shimano Deore XT 8000, 11-speed	DT Swiss H1900, 584-35, 148x12 mm / 110x15 mm



JARIFA² 6.9

6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm	SR Suntour Raidon Air, 100x15mm, 100mm travel	Shimano Deore XT 8000, 11-speed	DT Swiss H1900, 622-30, 148x12 mm / 110x15 mm



JARIFA² 6.8 PLUS

6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm	SR Suntour Raidon Air, 100x15mm, 100mm travel	Shimano Deore 6000, 10-speed	Rodi Tryp 35, 584-35, Novatec, 148x12 mm / 100x15 mm



JARIFA² 6.8

6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm	SR Suntour Raidon Air, 100x15mm, 100mm travel	Shimano Deore 6000, 10-speed	Rodi Tryp 25, 27": 584-25, 29": 662-25, Novatec, 148x12 mm / 110x15 mm



JARIFA² 6.7 PLUS

6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm	RST Alpha MLC, 100x15mm, 100mm travel	Shimano Deore 6000, 10-speed	Rodi Tryp 35, 584-35, Novatec, 148x12 mm / 100x15 mm



JARIFA² 6.7

6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm	RST Alpha MLC, 100x15mm, 100mm travel	Shimano Deore 6000, 10-speed	Rodi Tryp 25, 27": 584-25, 29": 662-25, Novatec, 148x12 mm / 110x15 mm



JARIFA² 3.9

6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm	SR Suntour XCM RL DS, 100 mm travel	Shimano Deore 592, 9-speed	Rodi Viper 21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR



Grey

JARIFA² 6.9 PLUS

WHEELSIZE	27	27	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / GRY	633518000	633518001	633518002	633518003



Grey

JARIFA² 6.9

WHEELSIZE	27	27	29	29	29	29
SIZE / CM	XS / 36	S / 40	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / GRY	633518010	633518011	633518012	633518013	633518014	633518015

- 6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm
- SR Suntour Raidon Air, 100x15mm, 100mm travel
- Bosch Performance CX, 36 V / 250 W
- Bosch PowerTube Li-Ionen 36 V
- Bosch Purion, LCD display with walk assist
- Shimano SLX 7000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FSA CK-745
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, 65mm
- Acros AZX-212 R5AH
- FOCUS Sport Saddle
- JD low dropper YSP 15, 31.6 mm, internal
- Shimano BR-M520, 200 mm / 180 mm
- DT Swiss H1900, 584-35, 148x12 mm / 110x15 mm
- Schwalbe Rocket Ron 2.8
- Supernova Mini 2, power LED, custom
- Grey

- 6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm
- SR Suntour Raidon Air, 100x15mm, 100mm travel
- Bosch Performance CX, 36 V / 250 W
- Bosch PowerTube Li-Ionen 36 V
- Bosch Purion, LCD display with walk assist
- Shimano SLX 7000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FSA CK-745
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, 65mm
- Acros AZX-212 R5AH
- FOCUS Sport Saddle
- JD low dropper YSP 15, 31.6 mm, internal
- Shimano BR-M520, 200 mm / 180 mm
- DT Swiss H1900, 622-30, 148x12 mm / 110x15 mm
- Schwalbe Racing Ralph Performance 2.25
- Supernova Mini 2, power LED, custom
- Grey

JARIFA² TOURING AND SPORT



JARIFA² 6.8 PLUS

WHEELSIZE	27	27	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / GRY	633518020	633518021	633518022	633518023
ARTICLE NO. EU / BLU	633518040	633518041	633518042	633518043

- 6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm
- SR Suntour Raidon Air, 100x15mm, 100mm travel
- Bosch Performance CX, 36 V / 250 W
- Bosch PowerTube Li-Ionen 36 V
- Bosch Purion, LCD display with walk assist
- Shimano Deore 6000
- Shimano Deore 6000, 10-speed
- Shimano HG500, 11-42T
- FSA CK-745
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, 65mm
- Acros AZX-212 R5AH
- FOCUS Sport Saddle
- JD low dropper YSP 15, 31.6 mm, internal
- Magura MT5 (vorne) / MT4 (hinten), 180 mm / 180 mm
- Rodi Tryp 35, 584-35, Novatec, 148x12 mm / 100x15 mm
- Schwalbe Rocket Ron 2.8
- Supernova Mini 2, power LED, custom
- Blue, Grey



JARIFA² 6.7 PLUS

WHEELSIZE	27	27	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / GRY	633518080	633518081	633518082	633518083
ARTICLE NO. EU / RED	633518100	633518101	633518102	633518103

- 6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RST Alpha MLC, 100x15mm, 100mm travel
- Bosch Active Plus, 36 V / 250 W
- Bosch PowerTube Li-Ionen 36 V
- Bosch Purion, LCD display with walk assist
- Shimano Deore 6000
- Shimano Deore 6000, 10-speed
- Shimano HG500, 11-42T
- FSA CK-200
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, 65mm
- VP Components
- FOCUS Sport Saddle
- BBB-BSP-20, 31.6 mm, 350mm
- Magura MT4, 180 mm / 180 mm
- Rodi Tryp 35, 584-35, Novatec, 148x12 mm / 100x15 mm
- Schwalbe Rocket Ron 2.8
- Grey, Red



JARIFA² 6.8

WHEELSIZE	27	27	29	29	29	29
SIZE / CM	XS / 36	S / 40	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / GRY	633518030	633518031	633518032	633518033	633518034	633518035
ARTICLE NO. EU / BLU	633518050	633518051	633518052	633518053	633518054	633518055

- 6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm
- SR Suntour Raidon Air, 100x15mm, 100mm travel
- Bosch Performance CX, 36 V / 250 W
- Bosch PowerTube Li-Ionen 36 V
- Bosch Purion, LCD display with walk assist
- Shimano Deore 6000
- Shimano Deore 6000, 10-speed
- Shimano HG500, 11-42T
- FSA CK-745
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, 65mm
- Acros AZX-212 R5AH
- FOCUS Sport Saddle
- JD low dropper YSP 15, 31.6 mm, internal
- Magura MT5 (vorne) / MT4 (hinten), 180 mm / 180 mm
- Rodi Tryp 25, 27": 584-25, 29": 662-25, Novatec, 148x12 mm / 110x15 mm
- Schwalbe Racing Ralph Performance 2.25
- Supernova Mini 2, power LED, custom
- Blue, Grey



JARIFA² 6.7

WHEELSIZE	27	27	29	29	29	29
SIZE / CM	XS / 36	S / 40	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / GRY	633518090	633518091	633518092	633518093	633518094	633518095
ARTICLE NO. EU / RED	633518110	633518111	633518112	633518113	633518114	633518115

- 6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm
- RST Alpha MLC, 100x15mm, 100mm travel
- Bosch Active Plus, 36 V / 250 W
- Bosch PowerTube Li-Ionen 36 V
- Bosch Purion, LCD display with walk assist
- Shimano Deore 6000
- Shimano Deore 6000, 10-speed
- Shimano HG500, 11-42T
- FSA CK-200
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB, Aluminum, 65mm
- VP Components
- FOCUS Sport Saddle
- BBB-BSP-20, 31.6 mm, 350mm
- Magura MT4, 180 mm / 180 mm
- Rodi Tryp 25, 27": 584-25, 29": 662-25, Novatec, 148x12 mm / 110x15 mm
- Schwalbe Smart Sam Performance 2.8
- Grey, Red

JARIFA² TOURING AND SPORT



Silver

JARIFA² 3.9

WHEELSIZE	27	27	29	29	29	29
SIZE / CM	XS / 40	S / 44	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / SIL	633517000	633517001	633517002	633517003	633517004	633517005

- 6061 Aluminum, 148x12 mm through axle, internal cable routing, post mount 180 mm
- SR Suntour XCM RL DS, 100 mm travel
- Bosch Performance CX, 36 V / 250 W
- Bosch PowerPack Li-Ionen 36 V
- Bosch Purion, LCD display with walk assist
- Shimano SL-M200
- Shimano Deore 592, 9-speed
- Shimano HG400 9S, 12-36T
- FSA CK-310
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-MT200, 180 mm / 160 mm
- Rodi Viper 21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe Rapid Rob 2.25
- Silver



*Subject to change



EXTENDS THE HOME TRAILS

MORE TRAIL
WITH E-HARDTAIL



TOP FEATURES


INTERNAL CABLE
ROUTING


T.E.C.
TAILORED ENERGY CONCEPT


AIRFLOW

RIDE BEYOND

JAM² HT

- 120 MM SUSPENSION FORK
- 27+ AND 29" WHEELS/TYRES
- RANGE CAN BE DOUBLED THANKS TO AN ADDITIONAL EXTERNAL BATTERY

ALWAYS AS MUCH ENERGY
AS YOU NEED

The new and easy-to-install TEC pack puts up to 756 Wh at your disposal for those longer tours. Pack your equipment on the smart rack and store your bottle on the down tube. You can tailor your bike to your own requirements.

MADE FOR THE
TRAIL

Vario seatpost and chain guide show the direction you're headed: ready for the trail.

IT'S THE RIDE CHARACTERIS-
TICS THAT COUNT

Thanks to the compact design of the Shimano E8000 motor and our battery, we were able to create a super agile geometry for the JAM² HT.

SIZE	S	M	L	XL
WHEEL SIZE	29" / 27,5"+	29" / 27,5"+	29" / 27,5"+	29" / 27,5"+
SEAT TUBE LENGTH	410	440	470	500
TOP TUBE LENGTH	589	602	622	638
HEAD TUBE ANGLE	67,5°	67,5°	67,5°	67,5°
SEAT TUBE ANGLE	74°	74°	74°	74°
CHAIN STAY LENGTH	460	460	460	460
BB DROP	60	60	60	60
HEAD TUBE LENGTH	100	110	130	150
FORK LENGTH	531	531	531	531
FORK RAKE	51	51	51	51
WHEEL BASE	1156	1170	1192	1215
STACK	626	635	654	672
REACH	410	420	435	450

Example: JAM² HT 6.9 Plus



JAM² TRAIL
HARDTAIL



JAM² HT 6.9 PLUS



JAM² HT 6.9 NINE



JAM² HT 6.8 PLUS



JAM² HT 6.8 NINE

7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm	FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 120 mm travel	Shimano Deore XT 8000, 11-speed	DT Swiss H1900, 584-35, 148x12 mm / 110x15 mm	7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm	FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 120 mm travel	Shimano Deore XT 8000, 11-speed	DT Swiss H1900, 622-30, 148x12 mm / 110x15 mm	7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm	RockShox Recon RL, 110x15 mm QR, 120 mm travel	Shimano Deore 6000, 10-speed	Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm	7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm	RockShox Recon RL, 110x15 mm QR, 120 mm travel	Shimano Deore 6000, 10-speed	Race Face AR30, 622-30, Novatec, 148x12 mm / 110x15 mm



JAM² HT 6.9 PLUS

WHEELSIZE	27	27	27	27
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / GRY	633514200	633514201	633514202	633514203
ARTICLE NO. EU / BLU	633514205	633514206	633514207	633514208

- 7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm
- FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 120 mm travel
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano SLX 7000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FC-E8000-34T
- BBB, Aluminum, Di2, riserbar, 760mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail SL
- KindShock E30i, 31,6mm, internal
- Shimano BR-M520, 200 mm / 180 mm
- DT Swiss H1900, 584-35, 148x12 mm / 110x15 mm
- Schwalbe Nobby Nic 2.8
- Blue, Grey



JAM² HT 6.9 NINE

WHEELSIZE	29	29	29	29
SIZE / CM	L / 47	S / 41	M / 44	XL / 50
ARTICLE NO. EU / PTL	633514212	633514210	633514211	633514213
ARTICLE NO. EU / BLU	633514217	633514215	633514216	633514218

- 7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm
- FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 120 mm travel
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano SLX 7000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 11S, 11-46T
- FC-E8000-34T
- BBB, Aluminum, Di2, riserbar, 760mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail SL
- KindShock E30i, 31,6mm, internal
- Shimano BR-M520, 200 mm / 180 mm
- DT Swiss H1900, 622-30, 148x12 mm / 110x15 mm
- Schwalbe Nobby Nic 2.35
- Blue, Grey

JAM² TRAIL
HARDTAIL



JAM² HT 6.8 PLUS

WHEELSIZE	27	27	27	27
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / GRY	633514220	633514221	633514222	633514223
ARTICLE NO. EU / LIME	633514225	633514226	633514227	633514228

- 7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm
- RockShox Recon RL, 110x15 mm QR, 120 mm travel
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano Deore 6000
- Shimano Deore 6000, 10-speed
- Shimano HG500, 11-42T
- FC-E8000-34T
- BBB, Aluminum, Di2, riserbar, 760mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail SL
- BBB-BSP-20, 31.6 mm, 350mm
- Magura MT2 Plus, 203 mm / 203 mm
- Race Face AR40, 584-40, Novatec, 148x12 mm / 110x15 mm
- Schwalbe Nobby Nic 2.8
- Grey, Lime



JAM² HT 6.8 NINE

WHEELSIZE	29	29	29	29
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / GRY	633514230	633514231	633514232	633514233
ARTICLE NO. EU / LIME	633514235	633514236	633514237	633514238

- 7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm
- RockShox Recon RL, 110x15 mm QR, 120 mm travel
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano Deore 6000
- Shimano Deore 6000, 10-speed
- Shimano HG500, 11-42T
- FC-E8000-34T
- BBB, Aluminum, Di2, riserbar, 760mm, rise: 20mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail SL
- BBB-BSP-20, 31.6 mm, 350mm
- Magura MT2 Plus, 203 mm / 203 mm
- Race Face AR30, 622-30, Novatec, 148x12 mm / 110x15 mm
- Schwalbe Nobby Nic 2.35
- Grey, Lime

*Subject to change

E-ROAD



ENDURANCE



PARALANE²



SUPPORT AT THE RIGHT MOMENT

SHIFT TO
NEXT LEVEL



TOP FEATURES



C.I.A.
COMFORT IMPROVING AREAS



F.I.T.
FOCUS INTEGRATION TECHNOLOGY



R.A.T.
RAPID AXLE TECHNOLOGY



ROAD BOOST

RIDE BEYOND

PARALANE²

- ENDURANCE GEOMETRY
- MOTOR/BATTERY UNIT THAT CAN BE COMPLETELY DECOUPLED FROM THE DRIVE
- WITH DISC BRAKES AND FITTED MUDGUARDS

COMBINES THE
ADVANTAGES OF RACING
BIKES AND E-BIKES

Light and agile, but with an extra push, when support is needed: the removable motor/battery unit is decoupled from the drive and only noticeable when it makes the ride easier.

MORE TYRE CLEARANCE
OFFERS GREATER FREEDOM

The maximum tyre clearance of up to 35 mm gives you the freedom to ride on any type of surface – whether asphalt or gravel tracks.

OPTIMUM
GEARSHIFT

Our pioneering road-boost standards with wide 148 and 110 mm R.A.T. axles ensure an optimum chain line on E-Racing bikes – which in turn ensures an optimum gearshift and less wear and tear.

SIZE	S	M	L	XL
WHEEL SIZE	28"	28"	28"	28"
SEAT TUBE LENGTH	480	516	540	570
TOP TUBE LENGTH	525	547	568	591
HEAD TUBE ANGLE	71,5	72	72,5	72,5
SEAT TUBE ANGLE	74,5	73,5	73,5	73,5
CHAIN STAY LENGTH	415	415	415	415
BB DROP	75	75	75	75
HEAD TUBE LENGTH	150	165	190	215
FORK LENGTH	380	380	380	380
FORK RAKE	46	46	46	46
WHEEL BASE	990	996	1014	1036
STACK	564	580	605	630
REACH	370	375	390	405

Example: PARALANE² 9.7



PARALANE² ENDURANCE



PARALANE² 9.9

Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano Dura-Ace R9150 Di2	DT Swiss ERC 1450 DB, 47mm height, road boost	FAZUA evation, 60 Nm, 250 W



PARALANE² 9.8

Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology	Shimano Ultegra R8050, Di2	DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub	FAZUA evation, 60 Nm, 250 W



PARALANE² 9.7

Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology	Shimano Ultegra R8020	DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub	FAZUA evation, 60 Nm, 250 W



PARALANE² 9.6

Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano 105 R7000	DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub	FAZUA evation, 60 Nm, 250 W



PARALANE² 6.9

Alloy E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing	Shimano Ultegra R8000	DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub	FAZUA evation, 60 Nm, 250 W



PARALANE² 6.8

Alloy E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing	Shimano 105 R7000	DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub	FAZUA evation, 60 Nm, 250 W



Silver

PARALANE² 9.9

WHEELSIZE	28	28	28	28
SIZE / CM	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / SIL	633618500	633618501	633618502	633618503



Anthracite

PARALANE² 9.8

WHEELSIZE	28	28	28	28
SIZE / CM	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / ANT	633618510	633618511	633618512	633618513
ARTICLE NO. EU / OLI	633618515	633618516	633618517	633618518
ARTICLE NO. UK / ANT	633728510	633728511	633728512	633728513



Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing



Carbon, Disc, road boost 110x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing



FAZUA evation, 60 Nm, 250 W



FAZUA evation, 250 Wh, removeable



FAZUA evation 1.0 remote



Shimano Dura Ace R9170, Di2



Shimano Dura-Ace R9150 Di2



Shimano Dura Ace R9100, 11-30T



FSA Carbon Arm, 52-36T



Easton EC90 Aero, Carbon, drop: 125mm, reach: 80mm



BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree



1-1/8", tapered, IH 50 / 33



Prologo Scratch



BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm



Shimano Dura Ace R9120 hydraulic Disc, 160 / 160 mm



DT Swiss ERC 1450 DB, 47mm height, road boost



Continental GRAND PRIX 4000 S II, 28-622



Curana C-Lite



Silver



Silver



Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing



Carbon, Disc, road boost 110x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing



FAZUA evation, 60 Nm, 250 W



FAZUA evation, 250 Wh, removeable



FAZUA evation 1.0 remote



Shimano Ultegra R8070, Di2



Shimano Ultegra R8050, Di2



Shimano Ultegra R8000, 11-34T



FSA Carbon Arm, 52-36T



BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm



BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree



1-1/8", tapered, IH 50 / 33



Prologo Scratch



BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm



Shimano Ultegra R8020 hydraulic Disc, 160 / 160 mm



DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub



Continental GRAND PRIX 4000 S II, 28-622



Curana C-Lite



Anthracite, Olive / Orange

PARALANE² ENDURANCE



Blue

PARALANE² 9.7

WHEELSIZE	28	28	28	28
SIZE / CM	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / BLK	633618520	633618521	633618522	633618523
ARTICLE NO. EU / BLU	633618525	633618526	633618527	633618528
ARTICLE NO. UK / BLU	633728525	633728526	633728527	633728528

- Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing
- Carbon, Disc, road boost 110x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- FAZUA evation, 60 Nm, 250 W
- FAZUA evation, 250 Wh, removeable
- FAZUA evation 1.0 remote
- Shimano Ultegra R8020
- Shimano Ultegra R8000
- Shimano Ultegra R8000, 11-34T
- FSA Aluminium Arm, 50-34T
- BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm
- BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo Scratch
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano Ultegra R8020 hydraulic Disc, 160 / 160 mm
- DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub
- Continental GRAND PRIX, 28-622
- Curana C-Lite
- Black/Anthracite, Blue



Silver

PARALANE² 6.9

WHEELSIZE	28	28	28	28
SIZE / CM	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / SIL	633618540	633618541	633618542	633618543

- Alloy E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing
- Carbon, disc, road boost 110x12 mm RAT through axle, RAT Evo Technology, flat mount 140 mm, internal brake cable routing
- FAZUA evation, 60 Nm, 250 W
- FAZUA evation, 250 Wh, removeable
- FAZUA evation 1.0 remote
- Shimano Ultegra R8020
- Shimano Ultegra R8000
- Shimano Ultegra R8000, 11-34T
- FSA Aluminium Arm, 50-34T
- BBB Deluxe, Aluminium, drop: 125mm, reach: 70mm
- BBB Deluxe, aluminium, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo Scratch
- BBB Deluxe, Aluminium, 27,2mm, 350mm, set-back 20mm
- Shimano Ultegra R8020 hydraulic disc, 160 / 160 mm
- DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub
- Continental Ultra Sport II, 700 x 28C
- Silver



Black/Anthracite

PARALANE² 9.6

WHEELSIZE	28	28	28	28
SIZE / CM	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / RED	633618530	633618531	633618532	633618533
ARTICLE NO. EU / BLK	633618535	633618536	633618537	633618538
ARTICLE NO. UK / RED	633728530	633728531	633728532	633728533
ARTICLE NO. UK / BLK	633728535	633728536	633728537	633728538

- Carbon SL E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing
- Carbon, Disc, road boost 110x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- FAZUA evation, 60 Nm, 250 W
- FAZUA evation, 250 Wh, removeable
- FAZUA evation 1.0 remote
- Shimano 105 R7020
- Shimano 105 R7000
- Shimano 105, 11-34T
- FSA Aluminium Arm, 50-34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo Scratch
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano 105 R7020 hydraulic Disc, 160 / 160 mm
- DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub
- Continental Ultra Sport II, 700 x 28C
- Curana C-Lite
- Black/Anthracite, Red




Red

PARALANE² 6.8


WHEELSIZE	28	28	28	28
SIZE / CM	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / RED	633618550	633618551	633618552	633618553

- Alloy E-Road, Disc, road boost 148x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing
- Carbon, disc, road boost 110x12 mm RAT through axle, RAT Evo Technology, flat mount 140 mm, internal brake cable routing
- FAZUA evation, 60 Nm, 250 W
- FAZUA evation, 250 Wh, removeable
- FAZUA evation 1.0 remote
- Shimano 105 R7020
- Shimano 105 R7000
- Shimano 105, 11-34T
- FSA Aluminium Arm, 50-34T
- BBB Basic, Aluminium, drop: 125 mm, reach: 70mm
- BBB Basic, aluminium, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo Scratch
- BBB Basic, Aluminium, 27,2mm, 350mm, set-back 20mm
- Shimano 105 R7020 hydraulic disc, 160 / 160 mm
- DT Swiss RR521 SPLINE DB, 32mm height w/ DT Swiss 370 boost hub
- Continental Ultra Sport II, 700 x 28C
- Red


E-ALLROUND

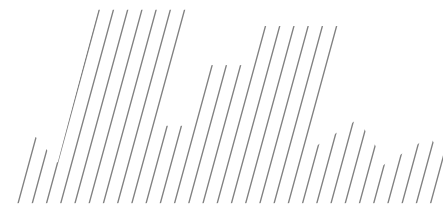


CITY

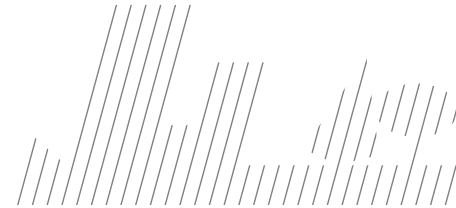

TREKKING

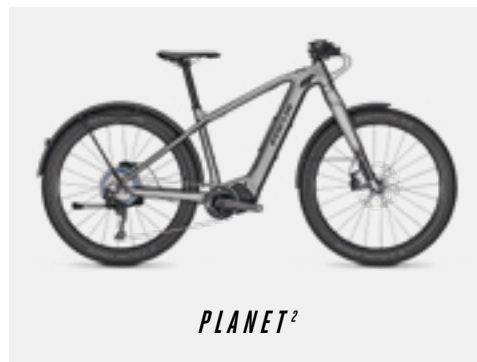

PLANET²

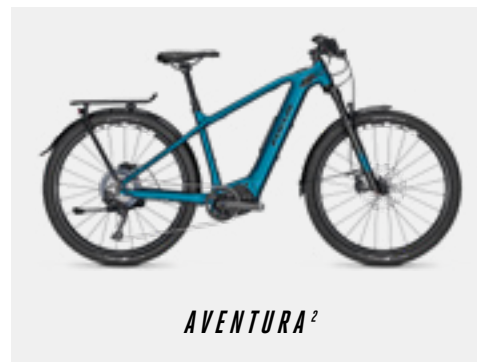

AVENTURA²



FULLY EQUIPPED
FOR EVERYDAY
CHALLENGES



TOP FEATURES



AIRFLOW



T.E.C.
TAILORED ENERGY CONCEPT



INTERNAL
CABLE ROUTING

RIDE BEYOND

PLANET²

- 29" (TOP-OF-THE-RANGE MODEL) OR 28" WHEELS
- AVAILABLE WITH TRAPEZIUM OR DIAMOND FRAME DESIGN
- RANGE CAN BE DOUBLED ON THE TOP-OF-THE RANGE MODEL THANKS TO AN ADDITIONAL EXTERNAL BATTERY

PREPARED FOR ANYTHING

Pannier rack, mudguards, lighting system, chain guard, bike stand – the list of equipment for the PLANET² is long and comprehensive.

THE INTEGRATED BATTERY
ENSURES A SLEEK DESIGN

Our battery is discreetly integrated in the down tube and can be removed at any time (excluding the top-of-the-range model).

DRY & CLEAN

Matching mudguards keep you and your clothes clean and dry.

SIZE	S	M	L	XL
WHEEL SIZE	28"	28"	28"	28"
SEAT TUBE LENGTH	410	440	470	500
TOP TUBE LENGTH	586	599	619	635
HEAD TUBE ANGLE	67,8	67,8	67,8	67,8
SEAT TUBE ANGLE	74,3	74,3	74,3	74,3
CHAIN STAY LENGTH	460	460	460	460
BB DROP	70	70	70	70
HEAD TUBE LENGTH	110	120	130	150
FORK LENGTH	505	505	505	505
FORK RAKE	51	51	51	51
WHEEL BASE	1146	1160	1182	1205
STACK	617	627	645	663
REACH	423	433	448	463

Example: PLANET² 9.8



PLANET² CITY



PLANET² 9.8



PLANET² 6.8



PLANET² 6.7

7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm	Rigid fork, alloy	Shimano Deore XT	Shimano MT500	6061 Aluminum	SR Suntour NEX E25, lockout, 15mm QR	Shimano SLX	Rodi Corsa 29" 662-23, Shimano Deore, 148x12 mm / 110x15 mm	6061 Aluminum	SR Suntour NEX E25, lockout, 9mm QR	Shimano Alivio	Rodi Corsa 29" 662-23, Shimano M3000, 9 mm QR / 9 mm QR



Anthrachte

PLANET² 9.8

WHEELSIZE	29	29	29	29
FRAME TYPE	DI	DI	DI	DI
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / ANT	633514560	633514561	633514562	633514563

- 7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm
- Rigid fork, alloy
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano Deore XT
- Shimano Deore XT
- Shimano SLX 7000, 11-46T
- FC-E8050-38T Hollow
- Aluminum, flatbar
- Aluminum, 31.8mm
- Acros AZX-212 R3AH
- Ergon SMC40 Sport Gel
- BBB, Aluminum, 31,6 mm
- Shimano Deore M6000, 200 mm / 180 mm
- Shimano MT500
- Schwalbe Supermoto X, 62-584
- Tubus Wingee
- Tubus Wingee panel rails
- Supernova Mini 2, power LED, custom
- Supernova E3 Tail Light, 6V, fender mount
- Ursus Queen, rear stand
- Anthrachte



Red

PLANET² 6.8

WHEELSIZE	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	TR	TR	TR
SIZE / CM	M / 48	L / 53	XL / 58	S / 43	M / 48	L / 53
ARTICLE NO. EU / BLK	633518310	633518311	633518312	633518313	633518314	633518315
ARTICLE NO. EU / RED	633518320	633518321	633518322	633518323	633518324	633518325

- 6061 Aluminum
- SR Suntour NEX E25, lockout, 15mm QR
- Bosch Performance CX, 75 Nm, 250 W, 50-300% support power
- BOSCH Powertube, 500 Wh, removeable
- BOSCH Purion with Control panel, walk assist
- Shimano Deore
- Shimano SLX
- Shimano HG500, 11-34T
- FSA CK-310
- Aluminum, flatbar
- Aluminum, 31.8mm
- VP Components
- FOCUS Urban
- BBB, Aluminum, 31,6 mm
- Shimano MT400, 180 mm / 180 mm
- Rodi Corsa 29" 662-23, Shimano Deore, 148x12 mm / 110x15 mm
- Continental Contact Speed, 42-622
- Tubus Wingee
- Tubus Wingee panel rails
- Busch Müller Ayy, 40 Lux
- Hermans rear light, integrated
- Rear stand, adjustable
- Black, Red



Black

PLANET² 6.7

WHEELSIZE	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	TR	TR	TR
SIZE / CM	M / 48	L / 53	XL / 58	S / 43	M / 48	L / 53
ARTICLE NO. EU / RED	633518330	633518331	633518332	633518333	633518334	633518335
ARTICLE NO. EU / BLK	633518340	633518341	633518342	633518343	633518344	633518345

- 6061 Aluminum
- SR Suntour NEX E25, lockout, 9mm QR
- Bosch Performance Cruise, 36 V / 250 W
- BOSCH Powertube, 500 Wh, removeable
- BOSCH Purion with Control panel, walk assist
- Shimano Acera
- Shimano Alivio
- Shimano HG200, 11-34T
- FSA CK-310
- Aluminum, flatbar
- Aluminum, 31.8mm
- VP Components
- FOCUS Urban, Kalkhoff Sport Comfort
- BBB, Aluminum, 31,6 mm
- Shimano BR-MT200, 180 mm / 180 mm
- Rodi Corsa 29" 662-23, Shimano M3000, 9 mm QR / 9 mm QR
- Continental Contact Speed, 42-622
- Tubus Wingee
- Tubus Wingee panel rails
- Busch Müller Ayy, 40 Lux
- Hermans rear light, integrated
- Rear stand, adjustable
- Black, Red

FINDS YOUR INNER ADVENTURER

ALL-ROUND
CAREFREE PACKAGE



TOP FEATURES

INTERNAL
CABLE ROUTING

T.E.C.
TAILORED ENERGY CONCEPT

AVENTURA²

- 29" WHEELS (27,5" FOR SMALL SIZES)
- 100 MM SUSPENSION FORK
- RANGE CAN BE DOUBLED ON THE TOP-OF-THE RANGE MODEL THANKS TO AN ADDITIONAL EXTERNAL BATTERY

PREPARED FOR ANYTHING

Whether you're planning a multi-day tour, or simply transporting stuff: the AVENTURA² is just as ideal for bike-packing trips as for transporting stuff around the city.

THE INTEGRATED BATTERY
ENSURES A SLEEK DESIGN

Our battery is discreetly integrated in the down tube and can be removed at any time (excluding the top-of-the-range model).

LONG RANGE

The powerful drive assistance is capable of record ranges for long excursions.

SIZE	S	M	L	XL
WHEEL SIZE	29"	29"	29"	29"
SEAT TUBE LENGTH	410	440	470	500
TOP TUBE LENGTH	585	599	619	635
HEAD TUBE ANGLE	68,7	68,7	68,7	68,7
SEAT TUBE ANGLE	75,2	75,2	75,2	75,2
CHAIN STAY LENGTH	460	460	460	460
BB DROP	69,4	69,4	69,4	69,4
HEAD TUBE LENGTH	110	120	130	150
FORK LENGTH	505	505	505	505
FORK RAKE	51	51	46	51
WHEEL BASE	1146	1160	1182	1205
STACK	616	625	644	662
REACH	420	430	445	460

Example: AVENTURA² 9.8

AVENTURA² TREKKING



7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm	SR Suntour Raidon 32 RLR DS, 15 x 110 mm QR, lockout	Shimano Deore XT	Shimano MT500	6061 Aluminum, internal cable routing, international disc brake standard	SR Suntour Raidon 32 RLR DS, 15 x 110 mm QR, lockout	Shimano Deore	Shimano MT500	6061 Aluminum, internal cable routing, international disc brake standard	SR Suntour Raidon 32 RL, 110x15 mm QR	Shimano Alivio	Rodi Tryp 25, 27" 584-25, 29" 662-25, Novatec, 148x12 mm / 110x15 mm



Petrol

AVENTURA² 9.8

WHEELSIZE	29	29	29	29
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / PTL	633514510	633514511	633514512	633514513

- 7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm
- SR Suntour Raidon 32 RLR DS, 15 x 110 mm QR, lockout
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano Deore XT
- Shimano Deore XT
- Shimano SLX 7000, 11-46T
- FC-E8050-38T Hollow
- Aluminum, riserbar
- Aluminum, 31.8mm
- Acros AZX-212 R3AH
- Ergon SMC40 Sport Gel
- KindShock E30i, 31,6mm, internal
- Shimano Deore M6000, 200 mm / 180 mm
- Shimano MT500
- Schwalbe Rocket Ron, Performance fold, 65-584
- Büchel
- Tubus, w/ integrated rear light
- Hermans Berleen
- Ursus Queen, rear stand
- Petrol

WHEELSIZE	29	29	29	29
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / PTL	633514510	633514511	633514512	633514513



Anthracite

AVENTURA² 6.8

WHEELSIZE	27	27	29	29	29	29
SIZE / CM	XS / 36	S / 40	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / RED	633518210	633518211	633518212	633518213	633518214	633518215
ARTICLE NO. EU / ANT	633518220	633518221	633518222	633518223	633518224	633518225



Anthracite

AVENTURA² 6.7

WHEELSIZE	27	27	29	29	29	29
SIZE / CM	XS / 36	S / 40	S / 40	M / 44	L / 48	XL / 52
ARTICLE NO. EU / SND	633518230	633518231	633518232	633518233	633518234	633518235
ARTICLE NO. EU / ANT	633518240	633518241	633518242	633518243	633518244	633518245

- 6061 Aluminum, internal cable routing, international disc brake standard
- SR Suntour Raidon 32 RLR DS, 15 x 110 mm QR, lockout
- Bosch Performance CX, 75 Nm, 250 W, 50-300% support power
- BOSCH Powertube, 500 Wh, removeable
- BOSCH Purion with Control panel, walk assist
- Shimano Deore
- Shimano Deore
- Shimano HG500, 11-42T
- FSA CK-745
- Aluminum, riserbar
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle, Kalkhoff Sport Comfort
- BBB, Aluminum, 31,6 mm
- Shimano MT435, 180 mm / 180 mm
- Shimano MT500
- Continental X King, 55-622
- Büchel
- Tubus, w/ integrated rear light
- Hermans Berleen
- Rear stand, adjustable
- Anthracite, Red


- 6061 Aluminum, internal cable routing, international disc brake standard
- SR Suntour Raidon 32 RL, 110x15 mm QR
- Bosch Performance Cruise, 36 V / 250 W
- BOSCH Powertube, 500 Wh, removeable
- BOSCH Purion with Control panel, walk assist
- Shimano Acera
- Shimano Alivio
- Shimano HG200, 11-36T
- FSA CK-745
- Aluminum, riserbar
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle, Kalkhoff Sport Comfort
- BBB, Aluminum, 31,6 mm
- Shimano BR-MT200, 180 mm / 180 mm
- Rodi Tryp 25, 27" 584-25, 29" 662-25, Novatec, 148x12 mm / 110x15 mm
- Continental X King, 55-622
- Büchel
- Tubus, w/ integrated rear light
- Hermans Berleen
- Rear stand, adjustable
- Anthracite, Sand

*Subject to change


MTB FULLY




XC & MARATHON RACE

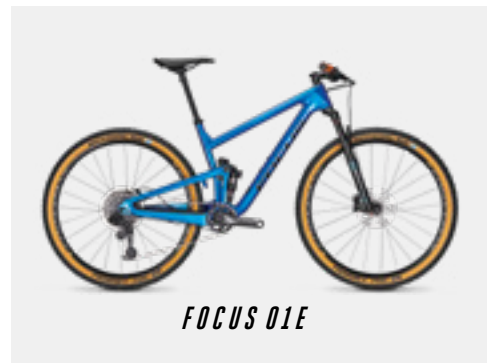

FOCUS D1E

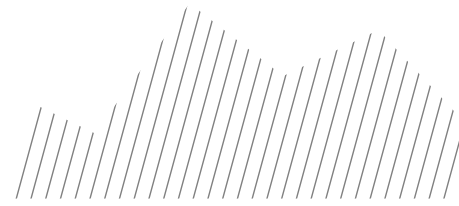


ALL-MOUNTAIN

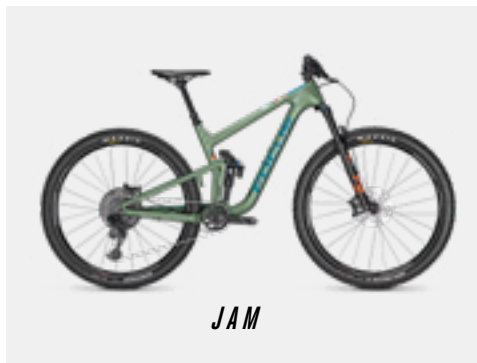

JAM



ENDURO

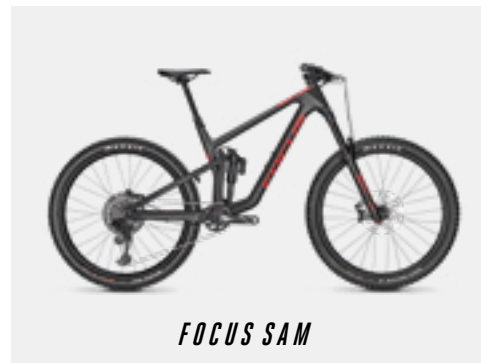

FOCUS SAM

JAM C SL, Fabian Scholz, Oberammergau (DE)



JAM C SL, Olly Wilkins, Madeira (PT)

SHIFTS RACING REQUIREMENTS

FULL-SUSPENSION
RACE BIKE FOR
DIFFICULT XC COURSES



TOP FEATURES

MAX
CARBON TECHNOLOGY

F.O.L.D.
FOCUS OPTIMIZED LINKAGE DESIGN

S.S.P.S.
STABLE STIFFNESS PER SIZE

R.A.T.
RAPID AXLE TECHNOLOGY

FOCUS 01E

- 100 MM OR 120 MM SUSPENSION FORK AND 29" WHEELS
- 100 MM F.O.L.D. FULL SUSPENSION
- FOR TECHNICALLY SOPHISTICATED RACE TRACKS AND ENERGY-SAPPING STAGE RACES, LIKE CAPE EPIC

LOVED BY
PROFESSIONALS

XC world-class athletes oversaw the development of the FOCUS 01E – ensuring that the highest demands were met.

OPTIMUM SUSPENSION
PERFORMANCE FOR EVERY
SITUATION

The F.O.L.D. kinematics specially tailored to the demands of cross-country helps you push the boundaries and reach the finish line faster.

SETS THE BENCHMARK IN
LIGHTWEIGHT CONSTRUCTION

The extremely lightweight frame and kinematics make every uphill climb a breeze.

SIZE	S	M	L
WHEEL SIZE	29"	29"	29"
SEAT TUBE LENGTH	420	450	480
TOP TUBE LENGTH	589	605	625
HEAD TUBE ANGLE	68,4	68,4	68,4
SEAT TUBE ANGLE	74,2	74,2	74,2
CHAIN STAY LENGTH	448	448	448
BB DROP	31,5	31,5	31,5
HEAD TUBE LENGTH	100	112	125
FORK LENGTH	531	531	531
FORK RAKE	51	51	51
WHEEL BASE	1139	1158	1179
STACK	604	611	628
REACH	410	426	441

Example: FOCUS 01E 8.9

FOCUS
ONE CROSS-COUNTRY & MARATHON



FOCUS 01E 9.9

MAX technology Carbon frame, 100 mm F.O.L.D. kinematic, PF30 BB, 148x12 mm through axle, internal cable routing, Post Mount 160 mm	FOX 32 Float SC Factory, 2-position remote w/ open mode, 15 x 110 mm QR, 100 mm travel	FOX Float DPS Factory, 2-position lockout, EVOL	Shimano XTR 9100



FOCUS 01E 8.9

Carbon frame, 100 mm F.O.L.D. kinematic, PF30 BB, 148x12 mm through axle, internal cable routing, Post Mount 160 mm	RockShox SID RL, 15 mm QR, Oneloc remote, 120mm travel	RockShox Monarch RT3	SRAM GX



FOCUS 01E 8.8

Carbon frame, 100 mm F.O.L.D. kinematic, PF30 BB, 148x12 mm through axle, internal cable routing, Post Mount 160 mm	Fox 32 Rhythm, sweep adjust, 15 mm QR, 120 mm travel	Fox Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune	SRAM NX, 12-speed



Petrol

FOCUS 01E 8.9

WHEELSIZE	29	29	29
SIZE / CM	S / 42	M / 45	L / 48
ARTICLE NO. EU / PTL	633013080	633013081	633013082

- Carbon frame, 100 mm F.O.L.D. kinematic, PF30 BB, 148x12 mm through axle, internal cable routing, Post Mount 160 mm
- RockShox SID RL, 15 mm QR, Oneloc remote, 120mm travel
- RockShox Monarch RT3
- SRAM GX Eagle
- SRAM GX
- Sram PG-1230 Eagle, 10-50T
- Sram Stylo Carbon DUB, 32T
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- Prologo Scratch X8
- Kind Shock Zeta, 31.6mm, 50mm travel
- Sram Level TL, 180 mm / 160 mm
- Mavic Crossmax Light
- Schwalbe Nobby Nic Evo Addix Speedgrip, 2.25"
- Schwalbe Racing Ray Performance 2.25
- Petrol



Tinted Black/red

FOCUS 01E 9.9

WHEELSIZE	29	29	29
SIZE / CM	S / 42	M / 45	L / 48
ARTICLE NO. EU / BLK	633013070	633013071	633013072

- MAX technology Carbon frame, 100 mm F.O.L.D. kinematic, PF30 BB, 148x12 mm through axle, internal cable routing, Post Mount 160 mm
- FOX 32 Float SC Factory, 2-position remote w/ open mode, 15 x 110 mm QR, 100 mm travel
- FOX Float DPS Factory, 2-position lockout, EVOL
- 100/100 mm
- Shimano XTR 9100, 12-speed
- Shimano XTR 9100
- Shimano XTR 9100, 12-speed, 10-51T
- Shimano XTR 9100, 32T
- BBB, carbon, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- Prologo Scratch X8, 7x9mm carbon rail
- BBB, carbon, 27.2 mm
- Shimano XTR
- DT Swiss XRC1200, 622-25
- Schwalbe Racing Ralph Evo Addix Speed 2.25
- Schwalbe Racing Ray Evo Addix Speedgrip 2.25
- Tinted Black/Red



Black

FOCUS 01E 8.8

WHEELSIZE	29	29	29
SIZE / CM	S / 42	M / 45	L / 48
ARTICLE NO. EU / BLK	633013090	633013091	633013092

- Carbon frame, 100 mm F.O.L.D. kinematic, PF30 BB, 148x12 mm through axle, internal cable routing, Post Mount 160 mm
- Fox 32 Rhythm, sweep adjust, 15 mm QR, 120 mm travel
- Fox Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- SRAM NX Eagle
- SRAM NX, 12-speed
- Sram PG-1230 Eagle, 10-50T
- Sram Stylo 6K, 32T
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- FOCUS Race SL
- BBB, Aluminum, 27,2 mm
- Sram Level TL, 180 mm / 160 mm
- DT Swiss M1900, 622-25
- Schwalbe Racing Ralph Performance 2.25
- Schwalbe Racing Ray Performance 2.25
- Black

CONQUERS ALL MOUNTAINS

PARTNER FOR ENDLESS ALPINE ADVENTURES



TOP FEATURES



S.S.P.S.
STABLE STIFFNESS PER SIZE



F.O.L.D.
FOCUS OPTIMIZED LINKAGE DESIGN



INTERNAL
CABLE ROUTING

RIDE BEYOND

JAM

- 140 MM SUSPENSION TRAVEL WITH 29" WHEELS OR 150 MM SUSPENSION TRAVEL WITH 27,5" WHEELS
- F.O.L.D. FULL SUSPENSION
- FOR TRANSALP RIDES (50/50 UPHILL AND DOWNHILL)

OPTIMUM SUSPENSION PERFORMANCE FOR EVERY SITUATION

The F.O.L.D. chassis, specially tailored to All-Mountain requirements, ensures a perfectly balanced combination: F.O.L.D. is extremely sensitive while being progressive enough to prevent a harsh bottom out.

LIGHT, ROBUST & LOW-MAINTENANCE

High-quality bearing, closed rear triangle and a shock that is protected against mud – we leave nothing to chance. It goes without saying that we also thought to add a bottle cage.

IT'S THE RIDE CHARACTERISTICS THAT COUNT

We want mountain biking to be a truly joyful experience, which is why we created the JAM with a modern, agile and aggressive geometry.

SIZE	S	M	L	XL
WHEEL SIZE	29"	29"	29"	29"
SEAT TUBE LENGTH	420	440	480	510
TOP TUBE LENGTH	585	605	632	657
HEAD TUBE ANGLE	67,3	67,3	67,3	67,3
SEAT TUBE ANGLE	74,2	74,2	74,2	74,2
CHAIN STAY LENGTH	440	440	440	440
BB DROP	29	29	29	29
HEAD TUBE LENGTH	110	110	140	160
FORK LENGTH	551	551	551	551
FORK RAKE	51	51	51	51
WHEEL BASE	1143	1172	1201	1229
STACK	622	622	645	662
REACH	410	430	450	470

Example JAM 8.9 NINE



JAM ALL-MOUNTAIN



JAM 8.9 NINE

Carbon front triangle, 6066 Aluminum rear triangle, 140mm F.O.L.D. kinematic, PF30 BB	FOX 34 Float Performance, 3-position micro adjust lever, 110x15 mm mm QR, 140 mm travel	FOX Float DPX2 Performance, 3-position lever, EVOL	SRAM GX



JAM 6.8 NINE

6066 Aluminum, 140mm F.O.L.D. kinematic, BSA BB, 148x12 through axle	RockShox Revelation RC, 110x15 mm QR, 140 mm travel	RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Sram NX, 12-speed



JAM 6.9 SEVEN

6066 Aluminum, 150mm F.O.L.D. kinematic, BSA BB, ISCG 05, 148x12 through axle	FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel	FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Shimano Deore XT 8000, 11-speed



JAM 6.9 NINE

6066 Aluminum, 140mm F.O.L.D. kinematic, BSA BB, 148x12 through axle	FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 140 mm travel	FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Shimano Deore XT 8000, 11-speed



JAM 6.8 SEVEN

6066 Aluminum, 150mm F.O.L.D. kinematic, BSA BB, ISCG 05, 148x12 through axle	RockShox Revelation RC, 110x15 mm QR, 150 mm travel	RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune	Sram NX, 12-speed



Mineral Green Metallic

JAM 8.9 NINE

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 44	L / 48	XL / 51
ARTICLE NO. EU / GRN	633013030	633013031	633013032	633013033

- Carbon front triangle, 6066 Aluminum rear triangle, 140mm F.O.L.D. kinematic, PF30 BB, 148x12 through axle, internal cable routing, Post Mount 180 mm
- FOX 34 Float Performance, 3-position micro adjust lever, 110x15 mm mm QR, 140 mm travel
- Fox Float DPX2 Performance, 3-position lever, EVOL
- SRAM GX Eagle
- SRAM GX
- Sram GX Eagle
- Sram Descendant 6K, 32T
- BBB, Aluminum, riserbar, 780mm, rise: 20mm, backsweep: 9 degree
- BBB, Aluminum, 55 mm
- Acros AIX-322 R1
- Focus Trail Saddle
- KindShock E30i, 31,6mm, internal
- SRAM Guide R
- Mavic XA, 622-30, 148x12 mm / 110x15 mm
- Maxxis HighRoller II 2.5 3C EXO TR
- Maxxis Aggressor 2.3 Dual EXO TR
- Mineral Green Metallic



Petrol

JAM 6.9 SEVEN

WHEELSIZE	27	27	27	27
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / PTL	633013045	633013046	633013047	633013048

- 6066 Aluminum, 150mm F.O.L.D. kinematic, BSA BB, ISCG 05, 148x12 through axle, internal cable routing, Post Mount 180 mm
- FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 150 mm travel
- FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano XT 8000, 11-46T, 11-speed
- Shimano XT 8000, 32T
- BBB, Aluminum, riserbar, 780mm, rise: 20mm, backsweep: 9 degree
- BBB, Aluminum, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail SL
- KindShock E30i, 31,6mm, internal
- Shimano Deore XT 8020/8000, 200mm / 180 mm
- DT Swiss M1900, 584-30, 148x12 mm / 110x15 mm
- Maxxis HighRoller II 2.5 3C EXO TR
- Maxxis Aggressor 2.3 Dual EXO TR
- Petrol

JAM ALL-MOUNTAIN



Petrol

JAM 6.9 NINE

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 44	L / 48	XL / 51
ARTICLE NO. EU / PTL	633013040	633013041	633013042	633013043

- 6066 Aluminum, 140mm F.O.L.D. kinematic, BSA BB, 148x12 through axle, internal cable routing, Post Mount 180 mm
- FOX 34 Rhythm, sweep adjust, 110x15 mm QR, 140 mm travel
- FOX Float DPS Performance, 3-position lever, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano XT 8000, 11-46T, 11-speed
- Shimano XT 8000, 32T
- BBB, Aluminum, riserbar, 780mm, rise: 20mm, backsweep: 9 degree
- BBB, Aluminum, 55 mm
- Acros AZX-212 R5AH
- FOCUS Trail SL
- KindShock E30i, 31,6mm, internal
- Shimano Deore XT 8020/8000, 200mm / 180 mm
- DT Swiss M1900, 622-30, 148x12 mm / 110x15 mm
- Maxxis HighRoller II 2.5 3C EXO TR
- Maxxis Aggressor 2.3 Dual EXO TR
- Petrol



Grey

JAM 6.8 NINE

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 44	L / 48	XL / 51
ARTICLE NO. EU / LIME	633013050	633013051	633013052	633013053
ARTICLE NO. EU / GRY	633013060	633013061	633013062	633013063

- 6066 Aluminum, 140mm F.O.L.D. kinematic, BSA BB, 148x12 through axle, internal cable routing, Post Mount 180 mm
- RockShox Revelation RC, 110x15 mm QR, 140 mm travel
- RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Sram NX Eagle
- Sram NX, 12-speed
- Sram PG-1230 Eagle, 10-50T
- Sram NX Eagle DUB, 32T
- BBB, Aluminum, riserbar, 780mm, rise: 20mm, backsweep: 9 degree
- BBB, Aluminum, 55 mm
- Acros AZX-212 R3AH
- FOCUS Trail SL
- KindShock E30i, 31,6mm, internal
- Magura MT5 (vorne) / MT4 (hinten), 203 mm / 180 mm
- Race Face AR30, 622-30, Novatec, 148x12 mm / 110x15 mm
- Maxxis HighRoller II 2.5 3C EXO TR
- Maxxis Aggressor 2.3 Dual EXO TR
- Grey, Lime/Olive



Grey

JAM 6.8 SEVEN

WHEELSIZE	27	27	27	27
SIZE / CM	S / 41	M / 44	L / 47	XL / 50
ARTICLE NO. EU / LIME	633013055	633013056	633013057	633013058
ARTICLE NO. EU / GRY	633013065	633013066	633013067	633013068

- 6066 Aluminum, 150mm F.O.L.D. kinematic, BSA BB, ISCG 05, 148x12 through axle, internal cable routing, Post Mount 180 mm
- RockShox Revelation RC, 110x15 mm QR, 150 mm travel
- RockShox Deluxe R, 210/55 mm, hardware: 25,0 x 8mm, custom tune
- Sram NX Eagle
- Sram NX, 12-speed
- Sram PG-1230 Eagle, 10-50T
- Sram NX Eagle DUB, 32T
- BBB, Aluminum, riserbar, 780mm, rise: 20mm, backsweep: 9 degree
- BBB, Aluminum, 55 mm
- Acros AZX-212 R3AH
- FOCUS Trail SL
- KindShock E30i, 31,6mm, internal
- Magura MT5 (vorne) / MT4 (hinten), 203 mm / 180 mm
- Race Face AR30, 584-30, Novatec, 148x12 mm / 110x15 mm
- Maxxis HighRoller II 2.5 3C EXO TR
- Maxxis Aggressor 2.3 Dual EXO TR
- Grey, Lime/Olive



NO OBSTACLE IS TOO GREAT
FOR ENDURO
RIDERS WITH RACING
AMBITIONS



TOP FEATURES


S.S.P.S.
STABLE STIFFNESS PER SIZE


F.O.L.D.
FOCUS OPTIMIZED LINKAGE DESIGN


INTERNAL
CABLE ROUTING

FOCUS SAM

- 170 MM SUSPENSION TRAVEL AND 27,5" WHEELS
- OVERALL MORE DOWNHILL THAN UPHILL
- FOR ENDURO RACING AND BIKE PARKS

LIGHT, ROBUST &
LOW-MAINTENANCE

High-quality bearing, closed rear triangle and a shock that is protected against mud – we leave nothing to chance. It goes without saying that we also thought to add a bottle cage.

OPTIMUM SUSPENSION
PERFORMANCE FOR EVERY
SITUATION

The F.O.L.D. chassis, specially tailored to demanding Enduro requirements, ensures a perfectly balanced combination: F.O.L.D. is extremely sensitive while being progressive enough to prevent a harsh bottom out.

LOVED BY
PROFESSIONALS

The FOCUS SAM geometry is optimised for Enduro use. Uncompromising, tried and tested, super successful.

SIZE	S	M	L
WHEEL SIZE	27.5"	27.5"	27.5"
SEAT TUBE LENGTH	400	425	450
TOP TUBE LENGTH	581	603	623
HEAD TUBE ANGLE	64,8	64,8	64,8
SEAT TUBE ANGLE	75	75	75
CHAIN STAY LENGTH	428	428	428
BB DROP	13	13	13
HEAD TUBE LENGTH	106	115	130
FORK LENGTH	562	562	562
FORK RAKE	42	42	42
WHEEL BASE	1170	1195	1221
STACK	600	610	623
REACH	420	440	460

Example: FOCUS SAM 9.9

FOCUS
SAM ENDURO



							
Carbon front and rear triangle, 170mm F.O.L.D. kinematic, ISCG 05, PF30 BB, 142x12 through axle	FOX 36 Rhythm, 110x15 mm QR, 170mm travel	RockShox Super Deluxe RCT, 230x65 mm, Hardware: 25,0x8 mm, custom tune	Sram GX Eagle, 12-speed	Carbon front and alloy rear triangle, 170mm F.O.L.D. kinematic, ISCG 05, PF30 BB, 142x12 through axle	FOX 36 Float Rhythm, sweep adjust, 110x15 mm QR, 170mm travel	FOX Van Performance	Sram GX Eagle, 12-speed



Black / Red
FOCUS SAM 9.9

WHEELSIZE	27	27	27
SIZE / CM	S / 41	M / 44	L / 46
ARTICLE NO. EU / BLK	633013000	633013001	633013002

- Carbon front and rear triangle, 170mm F.O.L.D. kinematic, ISCG 05, PF30 BB, 142x12 through axle, internal cable routing, Post Mount 180 mm
- RockShox Lyrik RC2, 15x110mm QR, 170 mm travel
- RockShox Super Deluxe RCT, 230x65 mm, Hardware: 25,0x8 mm, custom tune
- Sram GX Eagle
- Sram GX Eagle, 12-speed
- Sram PG-1275, 12-speed, 10-50T
- Truvativ Descendant Carbon DUB, 32T
- BBB, Aluminum, riserbar, 780mm, rise: 20mm, backsweep: 9 degree
- BBB, Aluminum, 55 mm
- Acros AIX-322 R1
- Prologo Dimension NDR
- RockShox Reverb Stealth 31.6
- SRAM Guide RSC
- Race Face Turbine 584-30, 148x12 mm / 110x15 mm
- Maxxis HighRoller II 2.5 3C EXD TR
- Maxxis DHF 2.5 3C EXD TR
- Black/Red



Olive / Orange
FOCUS SAM 8.9

WHEELSIZE	27	27	27
SIZE / CM	S / 41	M / 44	L / 46
ARTICLE NO. EU / OLI	633013010	633013011	633013012


- Carbon front and alloy rear triangle, 170mm F.O.L.D. kinematic, ISCG 05, PF30 BB, 142x12 through axle, internal cable routing, Post Mount 180 mm
- FOX 36 Float Rhythm, sweep adjust, 110x15 mm QR, 170mm travel
- FOX Van Performance
- Sram GX Eagle
- Sram GX Eagle, 12-speed
- Sram GX Eagle
- Truvativ Descendant 6K DUB, 32T
- BBB, Aluminum, riserbar, 780mm, rise: 20mm, backsweep: 9 degree
- BBB, Aluminum, 55 mm
- Acros AIX-322 R1
- FOCUS Trail Saddle
- KindShock E30i, 31,6mm, internal
- SRAM Guide R
- DT-Swiss E1900, 584-25, 15x110 MM / 12x148 MM
- Maxxis HighRoller II 2.5 3C EXD TR
- Maxxis DHF 2.5 3C EXD TR
- Olive/Orange

MTB-FULLY


MTB HARDTAIL



CROSS-COUNTRY

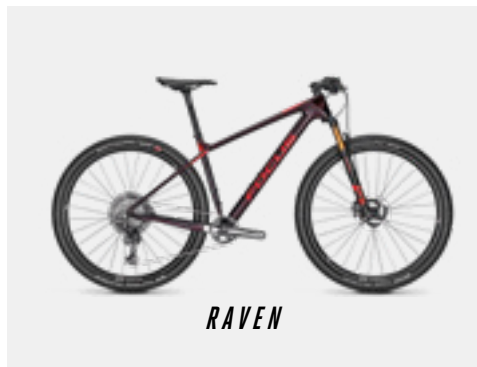

RAVEN

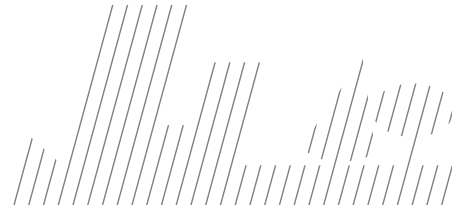

EVERYDAY & FITNESS



WHISTLER



INCREDIBLE ACCELERATION

UNCOMPROMISING CARBON
HARDTAIL



TOP FEATURES

MAX
CARBON TECHNOLOGY

C.I.A.
COMFORT IMPROVING AREAS

S.S.P.S.
STABLE STIFFNESS PER SIZE

R.A.T.
RAPID AXLE TECHNOLOGY

RAVEN

- 100 MM SUSPENSION FORK
- EXTREMELY LIGHT, RIGID AND COMFORTABLE IN ALL THE RIGHT PLACES
- DECORATED WITH WORLD AND EUROPEAN CHAMPION TITLES

SETS THE BENCHMARK IN
LIGHTWEIGHT CONSTRUCTION

Thanks to our high-end carbon technology, our RAVEN weighs just 885 grams. One of the lightest frames in the racing world – with the best performance.

RECOMMENDED BY
PROFESSIONALS

Our RAVEN is regularly represented at the World Cup. Only models that successfully survive our endurance test are good enough for you.

GREATER COMFORT
MEANS LESS FATIGUE

Careful attention has been paid to the lay of the fibres and the pipe dimensions of the seat tube, seat stays, bottom bracket and headset – as rigid as necessary, as comfortable as possible.

SIZE	S	M	L	XL
WHEEL SIZE	29"	29"	29"	29"
SEAT TUBE LENGTH	420	460	500	540
TOP TUBE LENGTH	592	608	629	649
HEAD TUBE ANGLE	69,8	69,8	69,8	69,8
SEAT TUBE ANGLE	74,5	74,5	74,5	74,5
CHAIN STAY LENGTH	435	435	435	435
BB DROP	68	68	68	68
HEAD TUBE LENGTH	104	107	130	150
FORK LENGTH	501	501	501	501
FORK RAKE	44	44	44	44
WHEEL BASE	1100	1116	1139	1160
STACK	620	623	644	663
REACH	420	435	450	465

Example: RAVEN 9.9

RAVEN *CROSS-COUNTRY*



RAVEN 9.9

MAX technology Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing	FOX 32 Float SC Factory, 2-position remote w/ open mode, 15 x 110 mm QR, 100 mm travel	Shimano XTR 9100, 12-speed	Shimano XTR



RAVEN 8.9

Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm	RockShox SID RL, 15 mm QR, Oneloc remote, 100mm travel	Shimano Deore XT 8000, 11-speed	Shimano Deore XT M8000, 180 mm / 160 mm



RAVEN 8.8

Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm	Fox 32 Rhythm, sweep adjust, 15 mm QR, 100 mm travel	SRAM GX	SRAM Level TL, 180 mm / 160 mm



RAVEN 8.7

Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm	Fox 32 Rhythm, sweep adjust, 15 mm QR, 100 mm travel	Shimano Deore XT 8000, 11-speed	Shimano SLX BR-M7000, 180 mm / 160 mm



RAVEN 8.6

Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm	RockShox Judy Gold, OneLoc, 15x100 mm	SRAM NX, 12-speed	Magura MT2 Plus, 160 mm / 160 mm



Tinted Black/Red

RAVEN 9.9

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / BLK	633013100	633013101	633013102	633013103



Blue

RAVEN 8.9

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / BLU	633013110	633013111	633013112	633013113

- MAX technology Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm
- FOX 32 Float SC Factory, 2-position remote w/ open mode, 15 x 110 mm QR, 100 mm travel
- Shimano XTR 9100, 12-speed
- Shimano XTR 9100, 12-speed
- Shimano XTR 9100, 12-speed, 10-51T
- Shimano XTR 9100, 32T
- BBB, carbon, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- Prologo Scratch X8, 7x9mm carbon rail
- BBB, carbon, 27.2 mm
- Shimano XTR
- DT Swiss XRC1200, 622-25
- Schwalbe Racing Ralph Evo Addix Speed 2.25
- Schwalbe Racing Ray Evo Addix Speedgrip 2.25
- Tinted Black/Red

- Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm, RAVEN, carbon frame, PF30 BB, 142 mm dropouts, internal cable routing, PM 160 rear brake
- RockShox SID RL, 15 mm QR, Oneloc remote, 100mm travel
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano XT 8000, 11-46T, 11-speed
- Shimano XT M8000, 36/26T
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- Prologo Scratch
- BBB, carbon, 27.2 mm
- Shimano Deore XT M8000, 180 mm / 160 mm
- Mavic Crossmax Light
- Schwalbe Nobby Nic Evo Addix Speedgrip, 2.25"
- Schwalbe Racing Ray Performance 2.25
- Blue

RAVEN *CROSS-COUNTRY*



RAVEN 8.8

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / BLK	633013120	633013121	633013122	633013123
ARTICLE NO. EU / RED	633013125	633013126	633013127	633013128

- Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm
- Fox 32 Rhythm, sweep adjust, 15 mm QR, 100 mm travel
- SRAM GX Eagle
- SRAM GX
- SRAM GX Eagle
- SRAM Stylo 6K, 32T
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- FOCUS Race SL
- BBB, Aluminum, 27,2 mm
- SRAM Level TL, 180 mm / 160 mm
- DT Swiss M1900, 622-25
- Schwalbe Racing Ralph Performance 2.25
- Black, Red



RAVEN 8.6

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / BLK	633013140	633013141	633013142	633013143

- Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm
- RockShox Judy Gold, OneLoc, 15x100 mm
- Sram NX Eagle
- Sram NX, 12-speed
- Sram PG-1230 Eagle, 10-50T
- Sram NX Eagle DUB, 32T
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- FOCUS Race SL
- BBB, Aluminum, 27,2 mm
- Magura MT2 Plus, 160 mm / 160 mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Novatec, 142x12 mm / 110x15 mm
- Schwalbe Racing Ralph Performance 2.25
- Black/White



RAVEN 8.7

WHEELSIZE	29	29	29	29
SIZE / CM	S / 42	M / 46	L / 50	XL / 54
ARTICLE NO. EU / BLK	633013130	633013131	633013132	633013133
ARTICLE NO. EU / GRN	633013135	633013136	633013137	633013138

- Carbon frame, PF30 BB, 142x12 mm through axle, internal cable routing, Post Mount 160 mm
- Fox 32 Rhythm, sweep adjust, 15 mm QR, 100 mm travel
- Shimano SLX 7000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 7000, 11-42T
- Shimano XT M8000, 36 / 26T
- BBB, Aluminum, flatbar, 720mm, rise: 0mm, backsweep: 9degree
- BBB Race, Aluminum, 31.8 mm
- Acros AIX-322 R1
- FOCUS Race SL
- BBB, Aluminum, 27,2 mm
- Shimano SLX BR-M7000, 180 mm / 160 mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Novatec, 9 mm QR / 9 mm QR
- Schwalbe Racing Ralph Performance 2.25
- Black, Green / Lime



SPORT COMES NATURALLY

MTB FOR
EVERYDAY USE



WHISTLER

- 100 MM SUSPENSION FORK
- DEPENDING ON SIZE, 29" (S, M, L, XL) OR 27,5" (XS, S) WHEELS
- MOUNTING OPTIONS FOR PANNIER RACK, MUDGUARD, LIGHT AND BIKE STAND

THE CHOICE IS YOURS

With the WHISTLER, you can choose between 27.5" and 29" wheelsets. Opt for the wheelset size that best suits your height and your requirements.

PREPARED FOR ANYTHING

Mounting options for pannier rack, mudguard, light and stand allow you to tailor the bike to your own individual requirements.

CONSISTENT BRAKE
PERFORMANCE

You need a reliable partner to handle hairy situations. That's why we've equipped our WHISTLER model with disc brakes – for a consistent braking performance and optimum braking behaviour.

SIZE	S	M	L
WHEEL SIZE	29"	29"	29"
SEAT TUBE LENGTH	420	470	520
TOP TUBE LENGTH	600	618	632
HEAD TUBE ANGLE	70	70	70
SEAT TUBE ANGLE	73	73	73
CHAIN STAY LENGTH	440	440	440
BB DROP	46	46	46
HEAD TUBE LENGTH	108	110	125
FORK LENGTH	515	515	515
FORK RAKE	46	46	46
WHEEL BASE	1092	1111	1126
STACK	640	642	655
REACH	404	422	432

Example: WHISTLER 6.9

WHISTLERSPORT & EVERYDAY



WHISTLER 6.9

6061 Aluminum, BSA BB, 142mm, Post Mount 160mm	RockShox Sektor RL, 110x15 mm QR, 100 mm travel	Shimano Deore XT 8000, 11-speed	Magura MT2, 160mm / 160 mm



WHISTLER 6.8

6061 Aluminum, BSA BB, 142mm, Post Mount 160mm	RockShox Recon RL, 100x15 mm QR, 100 mm travel	Shimano SLX 7000, 11-speed	Magura MT2, 160mm / 160 mm



WHISTLER 3.9

6061 Aluminum, BSA BB, international disc brake standard	RockShox Recon RL, 100x15 mm QR, 100 mm travel	Shimano Deore XT 8000, 11-speed	Shimano BR-MT200, 160 mm / 160mm



WHISTLER 3.8

6061 Aluminum, BSA BB, international Disc brake standard	RockShox 30 Silver TK, 9 mm QR	Shimano Deore XT 781, 10-speed	Shimano BR-MT200, 160 mm / 160mm



WHISTLER 3.7

6061 Aluminum, BSA BB, international Disc brake standard	SR Suntour XCM RL, 9 mm QR	Shimano Deore 592, 9-speed	Shimano BR-MT200, 180 mm / 160 mm



WHISTLER 3.6 EQP

6061 Aluminum, BSA BB, international Disc brake standard	SR Suntour XCT DS, 100 mm travel	Shimano Acera 360, 8-speed	Shimano BR-MT200, 160 mm / 160mm



WHISTLER 3.6

6061 Aluminum, BSA BB, international Disc brake standard	SR Suntour XCT HLO DS, 9 mm QR, coil spring, 100 mm travel	Shimano Acera 360, 8-speed	Shimano BR-MT200, 160 mm / 160mm



WHISTLER 3.5

6061 Aluminum, BSA BB, international Disc brake standard	SR Suntour XCT DS, 100 mm travel	Shimano TX800, 8-speed	Shimano BR-MT200, 160 mm / 160mm



WHISTLER 3.4 EQP

6061 Aluminum, BSA BB, international Disc brake standard	SR Suntour XCT DS, 100 mm travel	Shimano TY300, 7-speed	Shimano BR-M375, 160 mm / 160 mm



Red

WHISTLER 6.9

WHEELSIZE	29	29	29
SIZE / CM	S / 42	M / 47	L / 52
ARTICLE NO. EU / RED	633013200	633013201	633013202

- 6061 Aluminum, BSA BB, 142mm, Post Mount 160mm
- RockShox Sektor RL, 110x15 mm QR, 100 mm travel
- Shimano XT 8000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 7000, 11-42T
- Shimano XT M8000, 38 / 28T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Race SL
- Sport Components SP-DC1, 27.2x350 mm
- Magura MT2, 160mm / 160 mm
- Shimano WH-MT500, 27,5" 584-30, 29" 622-30, 9 mm QR / 9 mm QR
- Schwalbe Rapid Rob 2.1
- Red



Blue

WHISTLER 6.8

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 42	M / 47	L / 52	XL / 52	S / 42	M / 46
ARTICLE NO. EU / BLU	633013210	633013211	633013212	633013213	633013310	633013311

- 6061 Aluminum, BSA BB, 142mm, Post Mount 160mm
- RockShox Recon RL, 100x15 mm QR, 100 mm travel
- Shimano SLX 7000
- Shimano SLX 7000, 11-speed
- Shimano SLX 7000, 11-42T
- Shimano SLX M7000, 38 / 28T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Race SL
- Sport Components SP-DC1, 27.2x350 mm
- Magura MT2, 160mm / 160 mm
- Shimano WH-MT500, 27,5" 584-30, 29" 622-30, 9 mm QR / 9 mm QR
- Schwalbe Rapid Rob 2.1
- Blue

WHISTLER *SPORT & EVERYDAY*



Scarabeus

WHISTLER 3.9

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52	XS / 36	S / 40
ARTICLE NO. EU / SIL	633013225	633013226	633013227	633013228	633013325	633013326
ARTICLE NO. EU / SCA	633013220	633013221	633013222	633013223	633013320	633013321

- 6061 Aluminum, BSA BB, international disc brake standard
- RockShox Recon RL, 100x15 mm QR, 100 mm travel
- Shimano SLX 7000
- Shimano Deore XT 8000, 11-speed
- Shimano SLX 7000, 11-42T
- Shimano MT600, 36/26T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe Rapid Rob 2.1
- Scarabaeus, Silver



Black / Red

WHISTLER 3.7

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52	XS / 36	S / 40
ARTICLE NO. EU / BLK	633013240	633013241	633013242	633013243	633013340	633013341
ARTICLE NO. EU / ORG	633013245	633013246	633013247	633013248	633013345	633013346

- 6061 Aluminum, BSA BB, international Disc brake standard
- SR Suntour XCM RL, 9 mm QR
- Shimano Altus M2000
- Shimano Deore 592, 9-speed
- Shimano HG200, 11-36T
- Shimano MT100, 40 / 30 / 22T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-MT200, 180 mm / 160 mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe Rapid Rob 2.1
- Black / Red, Orange



Grey

WHISTLER 3.8

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52	XS / 36	S / 40
ARTICLE NO. EU / GRY	633013230	633013231	633013232	633013233	633013330	633013331
ARTICLE NO. EU / RED	633013235	633013236	633013237	633013238	633013335	633013336

- 6061 Aluminum, BSA BB, international Disc brake standard
- RockShox 30 Silver TK, 9 mm QR
- Shimano Deore 6000
- Shimano Deore XT 781, 10-speed
- Shimano HG50, 11-36T
- Shimano MT500, 36 / 26T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe Rapid Rob 2.1
- Grey, Hotchili Red



Silver

WHISTLER 3.6 EQP

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52	XS / 36	S / 40
ARTICLE NO. EU / SIL	633013280	633013281	633013282	633013283	633013380	633013381

- 6061 Aluminum, BSA BB, international Disc brake standard
- SR Suntour XCT DS, 100 mm travel
- Shimano ST-EF505
- Shimano Acera 360, 8-speed
- Shimano HG-200, 12-32T
- Shimano FC-TY301, S0, 42 / 34 / 24T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Impac Ridgepac 2.1
- Hebie Viper 64 mm
- Axa Blueline 30 Lux
- Büchel Beetle
- Ursus Queen, Rear stand
- Silver

WHISTLER *SPORT & EVERYDAY*



WHISTLER 3.6

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52	XS / 36	S / 40
ARTICLE NO. EU / GRY	633013250	633013251	633013252	633013253	633013350	633013351
ARTICLE NO. EU / LIME	633013255	633013256	633013257	633013258	633013355	633013356

- 6061 Aluminum, BSA BB, international Disc brake standard
- SR Suntour XCT HLO DS, 9 mm QR, coil spring, 100 mm travel
- Shimano ST-EF505
- Shimano Acera 360, 8-speed
- Shimano HG-200, 12-32T
- Shimano FC-TY301, SQ, 42 / 34 / 24T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe Rapid Rob 2.1
- Grey, Lime



WHISTLER 3.4 EQP

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52	XS / 36	S / 40
ARTICLE NO. EU / BLU	633013290	633013291	633013292	633013293	633013390	633013391

- 6061 Aluminum, BSA BB, international Disc brake standard
- SR Suntour XCT DS, 100 mm travel
- Shimano ST-EF505
- Shimano TY300, 7-speed
- Shimano HG-200, 12-32T
- Shimano FC-TY301, SQ, 42 / 34 / 24T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-M375, 160 mm / 160 mm
- Schürmann Yak 21 Disc, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Impac Ridgepac 2.1
- Hebie Viper 64 mm
- Ava Blueline 30 Lux
- Büchel Beetle
- Ursus Queen, Rear stand
- Blue




WHISTLER 3.5

WHEELSIZE	29	29	29	29	27	27
SIZE / CM	S / 40	M / 44	L / 48	XL / 52	XS / 36	S / 40
ARTICLE NO. EU / BLU	633013260	633013261	633013262	633013263	633013360	633013361
ARTICLE NO. EU / RED	633013265	633013266	633013267	633013268	633013365	633013366


- 6061 Aluminum, BSA BB, international Disc brake standard
- SR Suntour XCT DS, 100 mm travel
- Shimano ST-EF505
- Shimano TX800, 8-speed
- Shimano HG-200, 12-32T
- Shimano FC-TY301, SQ, 42 / 34 / 24T
- Sport Riser, Aluminum, risebar, 700mm, rise: 20mm
- Aluminum, 31.8mm
- VP Components
- FOCUS Sport Saddle
- Sport Components SP-DC1, 27.2x350 mm
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper 21, 27" 584-21, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Impac Ridgepac 2.1
- Blue, Red




ROAD & CYCLO-CROSS

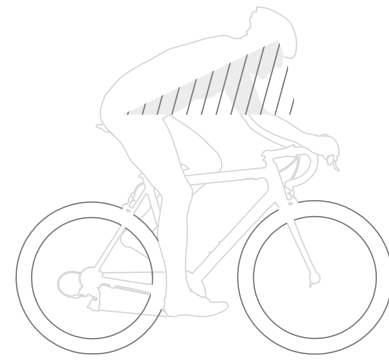


RACE

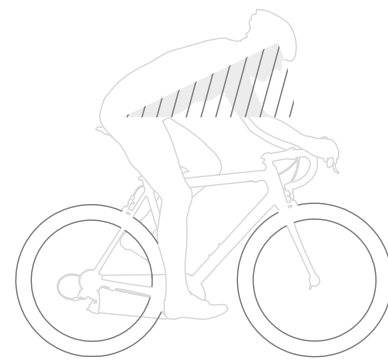


RACE

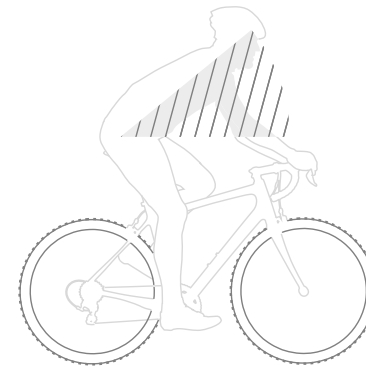


ENDURANCE

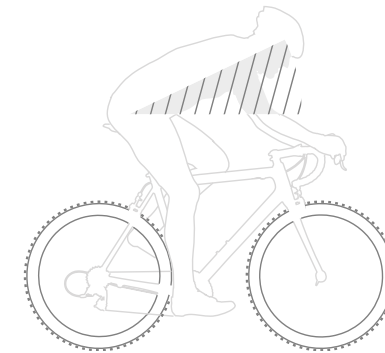


CYCLO-CROSS

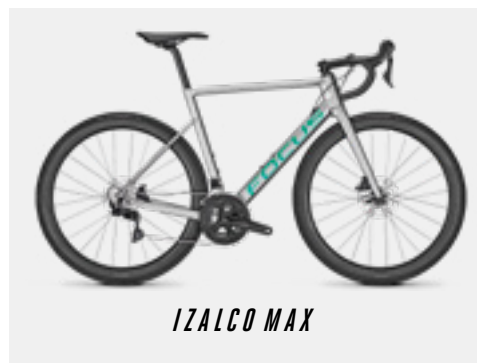

IZALCO MAX

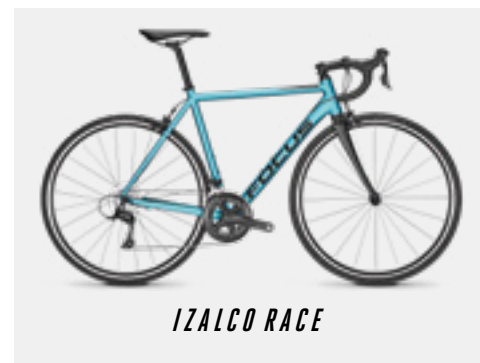

IZALCO RACE

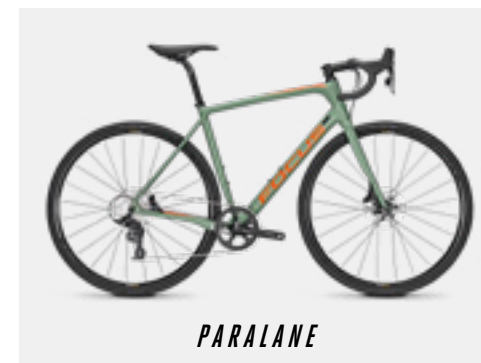

PARALANE



MARES

MORE THAN JUST THE FASTEST
TRANSMITS YOUR
PEDAL POWER
STRAIGHT TO THE ROAD



TOP FEATURES

MAX
CARBON TECHNOLOGY

S.S.P.S.
STABLE STIFFNESS PER SIZE

R.A.T.
RAPID AXLE TECHNOLOGY

IZALCO MAX

- RACE GEOMETRY
- OPTIMISED IN THE WIND TUNNEL
- WITH DISC BRAKES

OPTIMISED
IN THE WIND TUNNEL

We have specially developed a handlebar stem with a fully integrated headset in order to minimise wind resistance. The specially developed seatpost also perfectly complements the aerodynamic design of the IZALCO MAX.

TO SUM IT UP -
FASTER

Manufactured entirely from carbon fibre, the IZALCO MAX is ultra-light and agile. The extremely stiff bottom bracket transforms your pedal power and propels you forward. Light on the mountain, nippy in the sprint, streamlined in the wind.

SETTING THE BENCHMARK
FOR THE FUTURE

The pioneering IZALCO MAX sets new standards: Our technology flagship perfectly combines disc brakes with an aerodynamic frame.

SIZE	XXS	XS	S	M	L	XL	XXL
WHEEL SIZE	28"	28"	28"	28"	28"	28"	28"
SEAT TUBE LENGTH	430	470	490	510	530	550	590
TOP TUBE LENGTH	504	517	534	551	564	582	602
HEAD TUBE ANGLE	69,5	70,5	71,5	72	72	72,5	72,5
SEAT TUBE ANGLE	74	73,5	73,5	73,5	73,5	73,5	73,5
CHAIN STAY LENGTH	410	410	410	410	410	410	410
BB DROP	78	78	78	78	78	78	78
HEAD TUBE LENGTH	80	80	100	115	125	150	185
FORK LENGTH	392	392	392	392	392	392	392
FORK RAKE	46	46	46	46	46	46	46
WHEEL BASE	975	975	985	997	1010	1024	1044
STACK	502	505	528	544	554	579	613
REACH	360	368	378	390	400	410	420

Example: IZALCO MAX DISC 9.9

IZALCO MAX RACE



MAX technology carbon, disc, BB86, 142x12 mm through axle, R.A.T. Evo technology	Shimano Dura-Ace R9150 Di2	DT Swiss ARC 1450 DICUT DB, 48mm height	Continental GP4000S II, 700 x 25C, Folding



MAX technology carbon, disc, BB86, 142x12 mm through axle, R.A.T. Evo technology	Sram Red eTap	DT Swiss ARC 1450 SPLINE DB, 48mm height	Continental GP4000S II, 700 x 25C, Folding



MAX technology carbon, disc, BB86, 142x12 mm through axle, R.A.T. Evo technology	Shimano Ultegra R8050, Di2	DT Swiss ARC 1450 SPLINE DB, 48mm height	Continental GP4000S II, 700 x 25C, Folding



MAX technology Carbon, Disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, Di2/ mechanical	Shimano Ultegra R8050, Di2	DT Swiss PRC 1450 SPLINE DB, 35mm height	Continental Ultra Sport II, 700 x 25C, Folding



MAX technology Carbon, Disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, Di2/ mechanical	Shimano Ultegra R8020	Novatec R5, Disc center-lock, Carbon, 100x12 / 142x12 mm, 20 mm inner rim width	Continental Ultra Sport II, 700 x 25C, Folding



MAX technology Carbon, Disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, Di2/ mechanical	Shimano 105 R7000	Alex Rims CF45 Disc, centerlock, Carbon, 100x12/ 142x12 mm, 24/24 spokes, 19 mm inner width	Continental Ultra Sport II, 700 x 25C, Folding



MAX technology Carbon, caliper, PF30BB, 130 mm quick release dropouts, Di2 only, external brake cable routing



Silver

IZALCO MAX DISC 9.9

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / SIL	633012000	633012001	633012002	633012003	633012004	633012005	633012006
ARTICLE NO. UK / SIL	633016000	633016001	633016002	633016003	633016004	633016005	633016006



White

IZALCO MAX DISC 9.8

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / WHI	633012010	633012011	633012012	633012013	633012014	633012015	633012016
ARTICLE NO. UK / WHI	633016010	633016011	633016012	633016013	633016014	633016015	633016016

- MAX technology carbon, disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, electronical shifting only, flat mount 140 mm, internal brake cable routing
- MAX technology carbon, integrated, disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano Dura Ace R9170, Di2
- Shimano Dura-Ace R9150 Di2
- Shimano Dura Ace R9100, 11-30T
- Shimano Dura Ace R9100, 52/36T
- Easton EC90 Aero, carbon, drop: 125mm, reach: 80mm
- FOCUS IZALCO MAX custom, carbon, integrated, 31.8mm, -15 degree
- Acros, IS 52/40-ISS2/42
- Prologo Dimension
- FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm
- Shimano Dura Ace R9120 hydraulic disc, 160 / 160 mm
- DT Swiss ARC 1450 DICUT DB, 48mm height
- Continental GP4000S II, 700 x 25C, Folding
- Silver

- MAX technology carbon, disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, electronical shifting only, flat mount 140 mm, internal brake cable routing
- MAX technology carbon, integrated, disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- SRAM Red eTap
- Sram Red eTap
- Sram XG-1190, 11-28T
- Sram Red, 52/36T
- Easton EC90 Aero, carbon, drop: 125mm, reach: 80mm
- FOCUS IZALCO MAX custom, carbon, integrated, 31.8mm, -15 degree
- Acros, IS 52/40-ISS2/42
- Prologo Dimension
- FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm
- Sram Red eTap hydraulic disc, 160 / 160 mm
- DT Swiss ARC 1450 SPLINE DB, 48mm height
- Continental GP4000S II, 700 x 25C, Folding
- White

IZALCO MAX RACE



Silver

IZALCO MAX DISC 9.7

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / SIL	633012020	633012021	633012022	633012023	633012024	633012025	633012026
ARTICLE NO. UK / SIL	633016020	633016021	633016022	633016023	633016024	633016025	633016026

- MAX technology carbon, disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, electronical shifting only, flat mount 140 mm, internal brake cable routing
- MAX technology carbon, integrated, disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano Ultegra R8070, Di2
- Shimano Ultegra R8050, Di2
- Shimano Ultegra R8000, 11-30T
- Shimano Ultegra R8000, 52/36T
- Easton EC90 Aero, carbon, drop: 125mm, reach: 80mm
- FOCUS IZALCO MAX custom, carbon, integrated, 31.8mm, -15 degree
- Acros, IS 52/40-IS52/42
- Prologo Dimension
- FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm
- Shimano Ultegra R8020 hydraulic disc, 160 / 160 mm
- DT Swiss ARC 1450 SPLINE DB, 48mm height
- Continental GP400DS II, 700 x 25C, Folding
- Silver



White

IZALCO MAX DISC 8.9

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / WHT	633012040	633012041	633012042	633012043	633012044	633012045	633012046
ARTICLE NO. UK / WHT	633016040	633016041	633016042	633016043	633016044	633016045	633016046

- MAX technology Carbon, Disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, Di2/mechanical, flat mount 140 mm, internal brake cable routing
- MAX technology Carbon, integrated, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano Ultegra R8070, Di2
- Shimano Ultegra R8050, Di2
- Shimano Ultegra R8000, 11-30T
- Shimano Ultegra R8000, 52/36T
- BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm
- BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree
- Acros, IS 52/40-IS52/42
- Prologo Scratch
- FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm
- Shimano Ultegra R8020 hydraulic Disc, 160 / 160 mm
- DT Swiss PRC 1450 SPLINE DB, 35mm height
- Continental Ultra Sport II, 700 x 25C, Folding
- White



Black

IZALCO MAX DISC 9 FS

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / SIL	633081100	633081101	633081102	633081103	633081104	633081105	633081106
ARTICLE NO. EU / BLK	633081110	633081111	633081112	633081113	633081114	633081115	633081116

- MAX technology Carbon, Disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, electronical shifting only, flat mount 140 mm, internal brake cable routing, R.A.T. Evo axles included
- MAX technology Carbon, integrated, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- FOCUS IZALCO MAX custom, Carbon, integrated, 31.8mm, +/- 15 degree
- Acros, IS 52/40-IS52/42
- FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm
- Black, Silver



Black

IZALCO MAX DISC 8.8

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / BLK	633012050	633012051	633012052	633012053	633012054	633012055	633012056
ARTICLE NO. UK / BLK	633016050	633016051	633016052	633016053	633016054	633016055	633016056

- MAX technology carbon, disc, BB86, 142x12 mm through axle, RAT Evo technology, Di2/mechanical, flat mount 140 mm, internal brake cable routing
- MAX technology carbon, integrated, disc, 100x12 mm RAT through axle, RAT Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano Ultegra R8020
- Shimano Ultegra R8000
- Shimano Ultegra R8000, 11-30T
- Shimano Ultegra R8000, 52/36T
- BBB Deluxe, Aluminium, drop: 125mm, reach: 70mm
- BBB Deluxe, aluminium, 31.8mm, +/- 7 degree
- Acros, IS 52/40-IS52/42
- Prologo Scratch
- FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm
- Shimano Ultegra R8020 hydraulic disc, 160 / 160 mm
- Novatec R5, disc center-lock, carbon, 100x12 / 142x12 mm, 20 mm inner rim width
- Continental Ultra Sport II, 700 x 25C, Folding
- Black

IZALCO MAX RACE



Silver

IZALCO MAX DISC 8.7

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / SIL	633012060	633012061	633012062	633012063	633012064	633012065	633012066
ARTICLE NO. UK / SIL	633016060	633016061	633016062	633016063	633016064	633016065	633016066



MAX technology Carbon, Disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, Di2/mechanical, flat mount 140 mm, internal brake cable routing



MAX technology Carbon, integrated, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing



Shimano 105 R7020



Shimano 105 R7000



Shimano 105, 11-30T



Shimano 105 R7000, 50/34T



BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm



BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree



Acros, IS 52/40-IS52/42



Prologo Scratch



FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm



Shimano 105 R7020 hydraulic Disc, 160 / 160 mm



Alex Rims CF45 Disc, centerlock, Carbon, 100x12/142x12 mm, 24/24 spokes, 19 mm inner width



Continental Ultra Sport II, 700 x 25C, Folding



Silver



Black

IZALCO MAX DI2 FS

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 48	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / RED	633081020	633081021	633081022	633081023	633081024	633081025	633081026
ARTICLE NO. EU / BLK	633081030	633081031	633081032	633081033	633081034	633081035	633081036



MAX technology Carbon, caliper, PF30BB, 130 mm quick release dropouts, Di2 only, external brake cable routing



MAX technology Carbon, caliper, 100 mm quick release



VP Components



BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm



Black, Red

Red



White

IZALCO MAX DISC 8 FS

WHEELSIZE	28	28	28	28	28	28	28
SIZE / CM	XXS / 47	XS / 50	S / 52	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / WHT	633081200	633081201	633081202	633081203	633081204	633081205	633081206



MAX technology Carbon, Disc, BB86, 142x12 mm through axle, R.A.T. Evo technology, Di2/mechanical, flat mount 140 mm, internal brake cable routing, R.A.T. Evo axles included



MAX technology Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing



Acros, IS 52/40-IS52/42



FOCUS Aero Carbon, D-shape, 350 mm, set-back: 15mm



White



IMPRESSIVE ROAD PERFORMANCE

TOP RACING PERFORMANCE FOR EVERYONE



TOP FEATURES



S.S.P.S.
STABLE STIFFNESS PER SIZE



R.A.T.
RAPID AXLE TECHNOLOGY

IZALCO RACE

- RACE GEOMETRY
- EXCELLENT RIDE CHARACTERISTICS AT AN ATTRACTIVE PRICE
- WITH DISC OR RIM BRAKES

NO POWER IS LOST

Our IZALCO RACE is always in the mix when it really matters. Their extreme rigidity ensures that no power is lost – the power from your calves is converted directly into propulsion.

THE WORLD'S FASTEST FLOATING AXLE

Easier and faster: thanks to our patented FOCUS R.A.T. floating axle, wheel changes can be achieved in under 10 seconds.

CABLE-FREE DESIGN ENSURES A CLEAN-CUT LOOK

Ideal protection in an impressively sleek design: the internal cable routing of the IZALCO RACE ensures that there is no impairment of function due to mud and dirt.

SIZE	XS	S	M	L	XL
WHEEL SIZE	28"	28"	28"	28"	28"
SEAT TUBE LENGTH	480	510	540	570	600
TOP TUBE LENGTH	503	537	552	569	589
HEAD TUBE ANGLE	71	72	72,5	73,5	73,5
SEAT TUBE ANGLE	75,5	73,5	73,5	73,5	73,5
CHAIN STAY LENGTH	408	408	408	408	408
BB DROP	70	70	70	70	70
HEAD TUBE LENGTH	115	130	145	165	185
FORK LENGTH	370	370	370	370	370
FORK RAKE	43	43	43	43	43
WHEEL BASE	978	984	995	1002	1022
STACK	513	531	547	569	588
REACH	370	380	390	400	415

Example: IZALCO RACE 6.7

IZALCO RACE ^{RACE}



Carbon SL, Disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, Di2 ready	Shimano 105 R7000	Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes	Continental Ultra Sport II, 700 x 25C, Folding



Carbon SL, caliper, Pressfit 86 BB, 130 mm quick release dropouts, Di2 ready, internal brake cable routing	Shimano Ultegra R8050 Di2	DT Swiss P1850 SPLINE 23	Continental Ultra Sport II, 700 x 25C, Folding



Carbon SL, caliper, Pressfit 86 BB, 130 mm quick release dropouts, Di2 ready, internal brake cable routing	Shimano Ultegra R8000	DT Swiss P1850 SPLINE 23	Continental Ultra Sport II, 700 x 25C, Folding



Carbon SL, caliper, Pressfit 86 BB, 130 mm quick release dropouts, Di2 ready, internal brake cable routing	Shimano 105 R7000	Alex Rims ALX-210, quick release, Aluminum, 100/130 mm, 20/24 spokes, 17 mm inner rim width	Continental Ultra Sport II, 700 x 25C, Folding



6061 aluminum, caliper, BSA BB, 130 mm quick release dropouts, internal brake & gear cable routing	Shimano 105 R7000	Alex Rims ALX-210, quick release, Aluminum, 100/130 mm, 20/24 spokes, 17 mm inner rim width	Continental Ultra Sport II, 700 x 25C



6061 aluminum, caliper, BSA BB, 130 mm quick release dropouts, internal brake & gear cable routing	Shimano Sora R3000	Alex Rims ALX-210, quick release, Aluminum, 100/130 mm, 20/24 spokes, 17 mm inner rim width	Continental Ultra Sport II, 700 x 25C



IZALCO RACE DISC 9.9

WHEELSIZE	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / WHT	633012160	633012161	633012162	633012163	633012164
ARTICLE NO. UK / WHT	633016160	633016161	633016162	633016163	633016164

- Carbon SL, Disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, Di2 ready, flat mount 140 mm, internal brake & gear cable routing
- IZALCO RACE Carbon, Disc, 12 x 100 mm R.A.T. thru axle, flat mount 140 mm, internal brake cable routing
- Shimano 105 R7020
- Shimano 105 R7000
- Shimano 105, 11-34T
- Shimano 105 R7000, 50/34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Prologo Kappa RS STN Rail
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano 105 R7020 hydraulic Disc, 160 / 160 mm
- Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes, 17 mm inner rim width
- Continental Ultra Sport II, 700 x 25C, Folding
- White



IZALCO RACE 9.9

WHEELSIZE	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / ANT	633012100	633012101	633012102	633012103	633012104

- Carbon SL, caliper, Pressfit 86 BB, 130 mm quick release dropouts, Di2 ready, internal brake cable routing
- IZALCO RACE Carbon, caliper, 100 mm quick release
- Shimano Ultegra R8050, Di2
- Shimano Ultegra R8050 Di2
- Shimano Ultegra R8000, 11-30T
- Shimano Ultegra R8000, 52/36T
- BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm
- BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Prologo Kappa RS STN Rail
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano Ultegra R8000 Caliper
- DT Swiss P1850 SPLINE 23
- Continental Ultra Sport II, 700 x 25C, Folding
- Anthracite

IZALCO RACE RACE



Freestyle

IZALCO RACE 9.8

WHEELSIZE	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / FRS	633012110	633012111	633012112	633012113	633012114
ARTICLE NO. EU / RED	633012120	633012121	633012122	633012123	633012124

- Carbon SL, caliper, Pressfit 86 BB, 130 mm quick release dropouts, Di2 ready, internal brake cable routing
- IZALCO RACE Carbon, caliper, 100 mm quick release
- Shimano Ultegra
- Shimano Ultegra R8000
- Shimano Ultegra R8000, 11-30T
- Shimano Ultegra R8000, 52/36T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm, BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm
- BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Prologo Kappa RS STN Rail
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano Ultegra R8000 Caliper
- DT Swiss P1850 SPLINE 23
- Continental Ultra Sport II, 700 x 25C, Folding
- Freestyle, Red



Freestyle

IZALCO RACE 6.9

WHEELSIZE	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / FRS	633012140	633012141	633012142	633012143	633012144

- 6061 aluminum, caliper, BSA BB, 130 mm quick release dropouts, internal brake & gear cable routing, Race 2.0, alloy
- Carbon, caliper, 100 mm quick release
- Shimano 105 R7000
- Shimano 105 R7000
- Shimano 105, 11-30T
- Shimano RS510, 50/34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Velo VL-1489 Steel Rail
- BBB Basic, Aluminum, 27,2mm, 350mm, set-back 20mm
- Shimano 105 7000 Caliper
- Alex Rims ALX-210, quick release, Aluminum, 100/130 mm, 20/24 spokes, 17 mm inner rim width
- Continental Ultra Sport II, 700 x 25C
- Freestyle



White

IZALCO RACE 9.7

WHEELSIZE	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / WHT	633012130	633012131	633012132	633012133	633012134
ARTICLE NO. EU / BLK	633012170	633012171	633012172	633012173	633012174

- Carbon SL, caliper, Pressfit 86 BB, 130 mm quick release dropouts, Di2 ready, internal brake cable routing
- IZALCO RACE Carbon, caliper, 100 mm quick release
- Shimano 105 R7000
- Shimano 105 R7000
- Shimano 105, 11-30T
- Shimano 105 R7000, 50/34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Prologo Kappa RS STN Rail
- BBB Deluxe, Aluminum, 27,2mm, 350mm, set-back 20mm
- Shimano 105 7000 Caliper
- Alex Rims ALX-210, quick release, Aluminum, 100/130 mm, 20/24 spokes, 17 mm inner rim width
- Continental Ultra Sport II, 700 x 25C, Folding
- Black, White



Blue

IZALCO RACE 6.7

WHEELSIZE	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 57	XL / 60
ARTICLE NO. EU / BLU	633012150	633012151	633012152	633012153	633012154

- 6061 aluminum, caliper, BSA BB, 130 mm quick release dropouts, internal brake & gear cable routing, Race 2.0, alloy
- Carbon, caliper, 100 mm quick release
- Shimano Sora
- Shimano Sora R3000
- Shimano HG50, 11-30T
- Shimano Sora R3000, 50/34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Velo VL-1489 Steel Rail
- BBB Basic, Aluminum, 27,2mm, 350mm, set-back 20mm
- Shimano Sora R3000
- Alex Rims ALX-210, quick release, Aluminum, 100/130 mm, 20/24 spokes, 17 mm inner rim width
- Continental Ultra Sport II, 700 x 25C
- Blue

TAKES YOU FURTHER

A RACING BIKE THAT'S READY
FOR ANYTHING



TOP FEATURES



C.I.A.
COMFORT IMPROVING AREAS



S.S.P.S.
STABLE STIFFNESS PER SIZE



R.A.T.
RAPID AXLE TECHNOLOGY

RIDE BEYOND

PARALANE

- ENDURANCE GEOMETRY
- GENEROUS 35 MM TYRE CLEARANCE FOR A RANGE OF WIDTHS AND TREAD DEPTHS
- WITH DISC BRAKES AND FITTED MUDGUARDS

MORE TYRE CLEARANCE
OFFERS GREATER FREEDOM

The maximum tyre clearance of up to 35 mm gives you the freedom to ride on any type of surface – whether asphalt or gravel tracks.

INCLUDING QUICK-
MOUNTING MUDGUARD

Our sophisticated solutions make it quick and easy to mount mudguards. And best of all: mudguards are included with every PARALANE.

GREATER COMFORT
MEANS LESS FATIGUE

The Endurance geometry is designed for extended tours and the frame for maximum comfort, ensuring even longer cycling enjoyment.

SIZE	XS	S	M	L	XL	XXL
WHEEL SIZE	28"	28"	28"	28"	28"	28"
SEAT TUBE LENGTH	455	485	516	535	555	595
TOP TUBE LENGTH	497	526	547	560	577	591
HEAD TUBE ANGLE	71	71,5	72	72	72,5	72,5
SEAT TUBE ANGLE	75,5	74,5	73,5	73,5	73,5	73,5
CHAIN STAY LENGTH	415	415	415	415	415	415
BB DROP	75	75	75	75	75	75
HEAD TUBE LENGTH	120	150	165	180	200	215
FORK LENGTH	380	380	380	380	380	380
FORK RAKE	46	46	46	46	46	46
WHEEL BASE	979	990	996	1010	1021	1035
STACK	531	564	580	594	615	630
REACH	360	370	375	384	394	404

Example: PARALANE 8.9 GC



PARALANE ENDURANCE



PARALANE 9.9

Carbon SL, Disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano Ultegra R8050, Di2	Alex Rims CF35 Disc, centerlock, Carbon, 100x12/142x12 mm, 24/24 spokes, 19 mm inner width	Continental GP 4 Season, 700 x 28C, Folding



PARALANE 9.8

Carbon SL, Disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano Ultegra R8020	Novatec N30, Disc center-lock, Aluminum, 100x12 / 142x12 mm, 20 mm inner rim width	



PARALANE 9.7

Carbon SL, Disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano 105 R7000	Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes	Continental Ultra Sport II, 700 x 28C, Folding



PARALANE 8.9 GC

Carbon SL, disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Sram Apex	Mavic Aksium Disc	Continental Speedking CX, 700 x 32C, Folding



PARALANE 6.9

7005 hydroformed aluminum, Disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano 105 R7000	Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes, 17 mm inner rim width	Continental Ultra Sport II, 700 x 28C, Folding



PARALANE 5.9 GC

7005 hydroformed aluminum, disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Sram Apex	Novatec N30, disc center-lock, Aluminum, 100x12 / 142x12 mm, 20 mm inner rim width	Continental Contact Speed, 28-622



White

PARALANE 9.9

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / WHT	633012200	633012201	633012202	633012203	633012204	633012205
ARTICLE NO. UK / WHT	633016200	633016201	633016202	633016203	633016204	633016205

- Carbon SL, Disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Paralane Disc, Carbon
- Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano Ultegra R8070, Di2
- Shimano Ultegra R8050, Di2
- Shimano Ultegra R8000, 11-34T
- Shimano Ultegra R8000, 50/34T
- BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm
- BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo K3
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano Ultegra R8020 hydraulic Disc, 160 / 160 mm
- Alex Rims CF35 Disc, centerlock, Carbon, 100x12/142x12 mm, 24/24 spokes, 19 mm inner width
- Continental GP 4 Season, 700 x 28C, Folding
- Curana C-Lite
- White



Freestyle

PARALANE 9.8

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / FRS	633012210	633012211	633012212	633012213	633012214	633012215
ARTICLE NO. UK / FRS	633016210	633016211	633016212	633016213	633016214	633016215

- Carbon SL, disc, Pressfit 86 BB, 142x12 mm through axle, RAT Evo technology, flat mount 140 mm, internal brake & gear cable routing, Paralane Disc, carbon
- Carbon, disc, 100x12 mm RAT through axle, RAT Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano Ultegra R8020
- Shimano Ultegra R8000
- Shimano Ultegra R8000, 11-34T
- Shimano Ultegra R8000, 50/34T
- BBB Deluxe, Aluminium, drop: 125mm, reach: 70mm
- BBB Deluxe, aluminium, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo K3
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano Ultegra R8020 hydraulic disc, 160 / 160 mm
- Novatec N30, disc center-lock, aluminium, 100x12 / 142x12 mm, 20 mm inner rim width
- CONTINENTAL GRAND PRIX, 28-622
- Curana C-Lite
- Freestyle

PARALANE *ENDURANCE*



Red

PARALANE 9.7

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / RED	633012220	633012221	633012222	633012223	633012224	633012225
ARTICLE NO. UK / RED	633016220	633016221	633016222	633016223	633016224	633016225

- Carbon SL, Disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Paralande Disc, Carbon
- Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano 105 R7020
- Shimano 105 R7000
- Shimano 105, 11-34T
- Shimano 105 R7000, 50/34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo K3
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Shimano 105 R7020 hydraulic Disc, 160 / 160 mm
- Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes, 17 mm inner rim width
- Continental Ultra Sport II, 700 x 28C, Folding
- Curana C-Lite
- Red



Freestyle

PARALANE 6.9

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / FR	633012240	633012241	633012242	633012243	633012244	633012245
ARTICLE NO. UK / FR	633016240	633016241	633016242	633016243	633016244	633016245

- 7005 hydroformed aluminum, Disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Cayo AL Disc, alloy
- Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano 105 R7020
- Shimano 105 R7000
- Shimano 105, 11-34T
- Shimano RS510, 50/34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Velo VL-1489 Steel Rail
- BBB Basic, Aluminum, 27,2mm, 350mm, set-back 20mm
- Shimano 105 R7020 hydraulic Disc, 160 / 160 mm
- Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes, 17 mm inner rim width
- Continental Ultra Sport II, 700 x 28C, Folding
- Curana C-Lite
- Freestyle



Olive / Orange

PARALANE 8.9 GC

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / OLI	633012230	633012231	633012232	633012233	633012234	633012235
ARTICLE NO. UK / OLI	633016230	633016231	633016232	633016233	633016234	633016235

- Carbon SL, disc, Pressfit 86 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Paralande Disc, carbon
- Carbon, disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Sram Apex 1x
- Sram Apex
- Sram PG-1130, 11-36T
- Sram S350, 44T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Prologo K3
- BBB CPX Plus, Carbon, 27,2mm, 350mm, set-back: 20mm
- Sram Apex hydraulic disc, 160 / 160 mm
- Mavic Aksium Disc
- Continental Speedking CX, 700 x 32C, Folding
- Curana C-Lite
- Olive/Orange



Desert

PARALANE 5.9 GC

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 61
ARTICLE NO. EU / DES	633012260	633012261	633012262	633012263	633012264	633012265
ARTICLE NO. EU / BLK	633012270	633012271	633012272	633012273	633012274	633012275
ARTICLE NO. UK / DES	633016260	633016261	633016262	633016263	633016264	633016265
ARTICLE NO. UK / BLK	633016270	633016271	633016272	633016273	633016274	633016275

- 7005 hydroformed aluminum, disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Cayo AL Disc, alloy
- Carbon, disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Sram Apex 1x
- Sram Apex
- Sram PG-1130, 11-36T
- Sram S350, 44T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IH 50/33
- Velo VL-1489 Steel Rail
- BBB Basic, Aluminum, 27,2mm, 350mm, set-back 20mm
- Sram Apex hydraulic disc, 160 / 160 mm
- Novatec N30, disc center-lock, Aluminum, 100x12 / 142x12 mm, 20 mm inner rim width
- Continental Contact Speed, 28-622
- Curana C-Lite
- Black, Desert

DEFIES ADVERSE CONDITIONS

PERFECT FOR CYCLO-CROSS
RACING



TOP FEATURES



S.S.P.S.
STABLE STIFFNESS PER SIZE



R.A.T.
RAPID AXLE TECHNOLOGY

RIDE BEYOND

MARES

- CYCLO-CROSS RACE GEOMETRY
- ROBUST MODEL OPTIMISED TO HANDLE EXTREME DEMANDS SUCH AS MUD, RAIN AND SNOW
- WITH DISC BRAKES

25 YEARS OF SETTING THE
CYCLO-CROSS BENCHMARK

Years of feedback from professional riders have made the MARES what it is today: The Cyclo-Cross benchmark.

FRAME PROTECTION EX
WORKS

It's often very minor things that make all the difference between victory and defeat. Our proprietary-developed FOCUS CX chain guide prevents the chain from dropping.

THE WORLD'S FASTEST
FLOATING AXLE

Easier and faster: thanks to our patented FOCUS R.A.T. floating axle, wheel changes can be achieved in under 10 seconds.

SIZE	XS	S	M	L	XL	XXL
WHEEL SIZE	28"	28"	28"	28"	28"	28"
SEAT TUBE LENGTH	480	510	540	560	580	600
TOP TUBE LENGTH	523	534	544	555	565	577
HEAD TUBE ANGLE	70	70	70,5	71	71	71,5
SEAT TUBE ANGLE	73,5	73,5	73,5	73,5	73,5	73,5
CHAIN STAY LENGTH	425	425	425	425	425	425
BB DROP	65	65	65	65	65	65
HEAD TUBE LENGTH	110	120	130	140	150	160
FORK LENGTH	400	400	400	400	400	400
FORK RAKE	46	46	46	46	46	46
WHEEL BASE	1003	1015	1020	1027	1037	1045
STACK	527	537	548	559	569	580
REACH	365	375	382	390	397	405

Example: MARES 9.9



MARES CYCLO-CROSS



MARES 9.9

Carbon, Disc, PF30 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	F019SRAM-FORCE	DT Swiss C1800 SPLINE DB	Continental Cyclo-X King, 700 x 35C, Folding



MARES 9.8

Carbon, Disc, PF30 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano Ultegra R8020	Novatec N30, Disc center-lock, Aluminum, 100x12 / 142x12 mm, 20 mm inner rim width	Continental Cyclo-X King, 700 x 35C, Folding



MARES 9.7

Carbon, Disc, PF30 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	SRAM Apex	Alex Rims CXD-6, Disc center-lock, Aluminum, 100x12 / 142x12 mm, 24/24 spokes	Continental Cyclo-X King, 700 x 35C, Folding



MARES 6.9

7005 aluminum, disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Sram Apex	Novatec N30, disc center-lock, Aluminum, 100x12 / 142x12 mm, 20 mm inner rim width	Continental Race King CX, 700 x 35C



MARES 6.8

7005 aluminum, Disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano 105 R7000	Shimano WH-RS170, Disc center-lock, Aluminum, 100x12 / 142x12 mm, 28/28 spokes, 17 mm inner rim width	Continental Race King CX, 700 x 35C



MARES 6.7

7005 aluminum, Disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm	Shimano Tiagra R4700	Shimano WH-RS170, Disc center-lock, Aluminum, 100x12 / 142x12 mm, 28/28 spokes, 17 mm inner rim width	Continental Race King CX, 700 x 35C



Orange

MARES 9.9

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 60
ARTICLE NO. EU / ORG	633012300	633012301	633012302	633012303	633012304	633012305
ARTICLE NO. UK / ORG	633016300	633016301	633016302	633016303	633016304	633016305



Blue

MARES 9.8

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 60
ARTICLE NO. EU / BLU	633012310	633012311	633012312	633012313	633012314	633012315
ARTICLE NO. UK / BLU	633016310	633016311	633016312	633016313	633016314	633016315



Carbon, Disc, PF30 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Mares Disc, Carbon



Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing



SRAM Force 1x



F019SRAMFORCE



SRAM PG-1170, 11-32T



SRAM Force 1, 42T



BBB Deluxe, Aluminum, drop: 125mm, reach: 70mm



BBB Deluxe, Aluminum, 31.8mm, +/- 7 degree



1-1/8", tapered, IS 47/33



Prologo Scratch



BBB CPX Plus, Carbon, 27.2mm, 350mm, set-back: 20mm



SRAM Force hydraulic Disc, 160 / 160 mm



DT Swiss C1800 SPLINE DB



Continental Cyclo-X King, 700 x 35C, Folding



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange



Orange

MARES CYCLO-CROSS



Freestyle

MARES 9.7

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 60
ARTICLE NO. EU / FRS	633012320	633012321	633012322	633012323	633012324	633012325
ARTICLE NO. UK / FRS	633006320	633006321	633006322	633006323	633006324	633006325

- Carbon, Disc, PF30 BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Mares Disc, Carbon
- Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- SRAM Apex 1x
- SRAM Apex
- SRAM PG-1050, 11-32T
- SRAM Apex 1, 42T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Prologo Scratch
- BBB Deluxe, Aluminum, 27,2mm, 350mm, set-back 20mm
- SRAM Apex hydraulic Disc, 160 / 160 mm
- Alex Rims CXD-6, Disc center-lock, Aluminum, 100x12/142x12 mm, 24/24 spokes, 17 mm inner rim width
- Continental Cyclo-X King, 700 x 35C, Folding
- Freestyle



Freestyle

MARES 6.8

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 60
ARTICLE NO. EU / FRS	633012350	633012351	633012352	633012353	633012354	633012355
ARTICLE NO. UK / FRS	633016350	633016351	633016352	633016353	633016354	633016355

- 7005 aluminum, Disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Mares AL Disc, alloy
- Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano 105 R7020
- Shimano 105 R7000
- Shimano 105, 11-34T
- Shimano RS510, 46/36T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Velo VL-1489 Steel Rail
- BBB Basic, Aluminum, 27,2mm, 350mm, set-back 20mm
- Shimano 105 R7020 hydraulic Disc, 160 / 160 mm
- Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes, 17 mm inner rim width
- Continental Race King CX, 700 x 35C
- Freestyle



Mineral Green Matt

MARES 6.9

WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 60
ARTICLE NO. EU / GRN	633012340	633012341	633012342	633012343	633012344	633012345
ARTICLE NO. UK / GRN	633016340	633016341	633016342	633016343	633016344	633016345

- 7005 aluminum, disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Mares AL Disc, alloy
- Carbon, disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Sram Apex 1x
- Sram Apex
- Sram PG-1130, 11-36T
- Sram S350, 44T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Velo VL-1489 Steel Rail
- BBB Basic, Aluminum, 27,2mm, 350mm, set-back 20mm
- Sram Apex hydraulic disc, 160 / 160 mm
- Novatec N30, disc center-lock, Aluminum, 100x12 / 142x12 mm, 20 mm inner rim width
- Continental Race King CX, 700 x 35C
- Mineral Green Matt




Blue

MARES 6.7


WHEELSIZE	28	28	28	28	28	28
SIZE / CM	XS / 48	S / 51	M / 54	L / 56	XL / 58	XXL / 60
ARTICLE NO. EU / BLU	633012360	633012361	633012362	633012363	633012364	633012365
ARTICLE NO. UK / BLU	633016360	633016361	633016362	633016363	633016364	633016365

- 7005 aluminum, Disc, BSA BB, 142x12 mm through axle, R.A.T. Evo technology, flat mount 140 mm, internal brake & gear cable routing, Mares AL Disc, alloy
- Carbon, Disc, 100x12 mm R.A.T. through axle, R.A.T. Evo Technology, flat mount 140 mm, internal brake cable routing
- Shimano Tiagra
- Shimano Tiagra R4700
- Shimano HG500, 11-34T
- Shimano Tiagra 4700, 50/34T
- BBB Basic, Aluminum, drop: 125 mm, reach: 70mm
- BBB Basic, Aluminum, 31.8mm, +/- 7 degree
- 1-1/8", tapered, IS 47/33
- Prologo Scratch
- BBB Basic, Aluminum, 27,2mm, 350mm, set-back 20mm
- Shimano RS405 hydraulic Disc, 160 / 160 mm
- Shimano WH-RS170, Disc center-lock, Aluminum, 100x12/142x12 mm, 28/28 spokes, 17 mm inner rim width
- Continental Race King CX, 700 x 35C
- Blue


ALLROUND

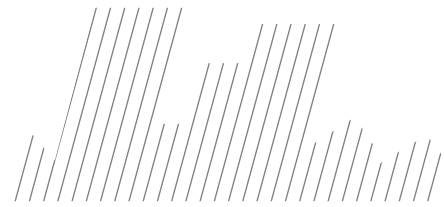


CITY

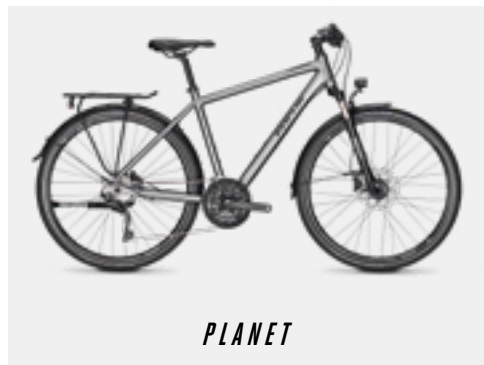

PLANET

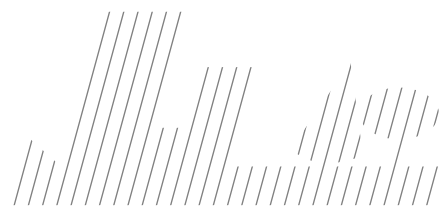

EVERYDAY & FITNESS

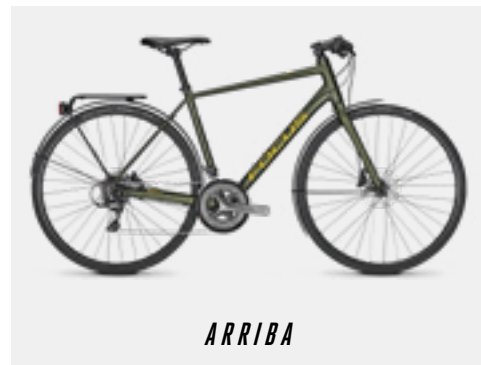

ARRIBA



HYBRID



CRATER LAKE



CONQUERS THE CITY

MEANS OF TRANSPORTATION
AND
LIFESTYLE ITEM



PLANET

- WITH BELT DRIVE, HUB GEARS, LIGHT AND MUDGUARDS
- RELIABLE, LOW-MAINTENANCE URBAN BIKE
- WITH DISC BRAKES

CAREFREE & CLEAN

No squeaking, no mud on your trouser legs and minimal maintenance requirements – all made possible thanks to the PLANET's hub gears and belt drive.

CONSISTENT BRAKE
PERFORMANCE

You may love whizzing past stationary cars in the city, but you'll still have to brake at some point! The disc brakes enable perfectly controlled braking with consistent performance.

PREPARED FOR ANYTHING

Mudguard and light ensure you're well equipped when you're out and about in bad weather or after dark.

SIZE	S	M	L	XL
WHEEL SIZE	28"	28"	28"	28"
SEAT TUBE LENGTH	450	500	550	600
TOP TUBE LENGTH	569	584	598	612
HEAD TUBE ANGLE	70,5	70,5	70,5	70,5
SEAT TUBE ANGLE	72,5	72,5	72,5	72,5
CHAIN STAY LENGTH	434	434	434	434
BB DROP	62	62	62	62
HEAD TUBE LENGTH	155	170	185	195
FORK LENGTH	395	395	395	395
FORK RAKE	46	46	46	46
WHEEL BASE	1056	1063	1078	1087
STACK	568	582	596	606
REACH	390	400	410	420

Example: PLANET 6.8

PLANET CITY



PLANET 6.8

-
-
-
-



PLANET 6.7

-
-
-
-



Black

PLANET 6.8

WHEELSIZE	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	TR	TR	TR
SIZE / CM	M / 50	L / 55	XL / 60	S / 45	M / 50	L / 55
ARTICLE NO. EU / BLK	633013610	633013611	633013612	633013613	633013614	633013615

-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-



Anthracite

PLANET 6.7

WHEELSIZE	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	TR	TR	TR
SIZE / CM	M / 50	L / 55	XL / 60	S / 45	M / 50	L / 55
ARTICLE NO. EU / ANT	633013620	633013621	633013622	633013623	633013624	633013625

-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

GETS YOU OFF THE COUCH AND INTO GEAR

RELIABLE
FITNESS PARTNER



ARRIBA

- WITH DISC BRAKES
- AVAILABLE WITH TRAPEZIUM OR DIAMOND FRAME
- STYLE AND SPEED IN URBAN ENVIRONMENTS

PREPARED FOR ANYTHING

Whether you're heading off on a long tour or training in the rain – no problem for our models fitted with a pannier rack and mudguard.

THE CHOICE IS YOURS

And to ensure your workout is as comfortable as possible, we offer two frame geometries – trapezium or diamond.

CONSISTENT BRAKE
PERFORMANCE

Our ARRIBAs are equipped with disc brakes to help you keep control even when travelling at top speeds.

SIZE	S	M	L	XL
WHEEL SIZE	28"	28"	28"	28"
SEAT TUBE LENGTH	450	500	550	600
TOP TUBE LENGTH	569	584	598	612
HEAD TUBE ANGLE	70,5	70,5	70,5	70,5
SEAT TUBE ANGLE	72,5	72,5	72,5	72,5
CHAIN STAY LENGTH	434	434	434	434
BB DROP	62	62	62	62
HEAD TUBE LENGTH	155	170	185	195
FORK LENGTH	395	395	395	395
FORK RAKE	46	46	46	46
WHEEL BASE	1056	1063	1078	1087
STACK	568	582	596	606
REACH	390	400	410	420

Example: ARRIBA 3.9

ARRIBA *FITNESS & CITY*



ARRIBA 3.9



ARRIBA 3.8

Arriba, Aluminum 6061, Disc, BSA BB, 135 mm quick release dropouts, post mount 160 mm, internal brake & gear cable routing	Arriba, Aluminum, Disc, 100 mm quick release, post mount 160 mm, external brake cable routing	Shimano Claris 2000, 8-speed, short cage	Shimano BR-MT200, 160 mm / 160mm	Arriba, Aluminum 6061, Disc, BSA BB, 135 mm quick release dropouts, post mount 160 mm, internal brake & gear cable routing	Arriba, Aluminum, Disc, 100 mm quick release, post mount 160 mm, external brake cable routing	Shimano Tourney TX800, 8-speed, long cage	Shimano BR-MT200, 160 mm / 160mm



Olive

ARRIBA 3.9

WHEELSIZE	28	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	DI	TR	TR	TR
SIZE / CM	S / 45	M / 50	L / 55	XL / 60	S / 45	M / 50	L / 55
ARTICLE NO. EU / OLI	633012400	633012401	633012402	633012403	633012405	633012406	633012407

- Arriba, Aluminum 6061, Disc, BSA BB, 135 mm quick release dropouts, post mount 160 mm, internal brake & gear cable routing
- Arriba, Aluminum, Disc, 100 mm quick release, post mount 160 mm, external brake cable routing
- Shimano Claris SL2000
- Shimano Claris 2000, 8-speed, short cage
- Shimano HG200, 12-32T
- Shimano Claris 2000, 50 / 34T
- Concept EX, Aluminum, flat
- Concept, Aluminum, 31.8mm, +/- 6degree
- 1-1/8", ZS 44 / 30
- Velo VL-3363 Steel Rail
- Concept, Aluminum, 27.2 mm, 350 mm, set-back: 15mm
- Shimano BR-MT200, 160 mm / 160mm
- Concept Aluminum, 28", 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Continental Contact Speed, 28-622
- Pletscher Sport, Alloy, 35 mm
- Arriba, alloy
- Olive



Blue

ARRIBA 3.8

WHEELSIZE	28	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	DI	TR	TR	TR
SIZE / CM	S / 45	M / 50	L / 55	XL / 60	S / 45	M / 50	L / 55
ARTICLE NO. EU / BLU	633012410	633012411	633012412	633012413	633012415	633012416	633012417
ARTICLE NO. EU / BLK	633012420	633012421	633012422	633012423	633012425	633012426	633012427

- Arriba, Aluminum 6061, Disc, BSA BB, 135 mm quick release dropouts, post mount 160 mm, internal brake & gear cable routing
- Arriba, Aluminum, Disc, 100 mm quick release, post mount 160 mm, external brake cable routing
- Shimano EF505
- Shimano Tourney TX800, 8-speed, long cage
- Shimano HG200, 12-32T
- Shimano Tourney TY501, 48 / 38 / 28T
- Concept EX, Aluminum, flat
- Concept, Aluminum, 31.8mm, +/- 6degree
- 1-1/8", ZS 44 / 30
- Velo VL-3363 Steel Rail
- Concept, Aluminum, 27.2 mm, 350 mm, set-back: 15mm
- Shimano BR-MT200, 160 mm / 160mm
- Concept Aluminum, 28", 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Continental Contact Speed, 28-622
- Black, Blue

FAST ALL-PURPOSE WEAPON

FOR ALL THOSE WHO WANT TO
KEEP THEIR OPTIONS OPEN



CRATER LAKE

- 63 MM SUSPENSION FORK AND DISC BRAKES
- AVAILABLE WITH TRAPEZIUM OR DIAMOND FRAME, COMFORTABLE AND UPRIGHT GEOMETRY
- VERSATILE BIKE FOR RIDING IN CITY AND FOREST AREAS, GREAT ON BOTH TARMAC ROADS AND GRAVEL TRACKS

THE CHOICE IS YOURS

With the CRATER LAKE, you can choose between two different frame designs – a low-step-through or a diamond frame.

WELL PREPARED

The suspension fork and lugged tyres of the CRATER LAKE ensure you're perfectly prepared for rides on gravel tracks.

EFFORTLESSLY UPHILL

Three chainrings ensure an outstanding gear ratio range, so no mountain is too steep.

SIZE	S	M	L	XL
WHEEL SIZE	28"	28"	28"	28"
SEAT TUBE LENGTH	450	500	500	550
TOP TUBE LENGTH	570	580	595	610
HEAD TUBE ANGLE	71	71,5	71,5	71,5
SEAT TUBE ANGLE	74	73,5	73,5	73,5
CHAIN STAY LENGTH	465	465	465	465
BB DROP	60	60	55	55
HEAD TUBE LENGTH	135	135	170	220
FORK LENGTH	465	465	465	465
FORK RAKE	45	45	45	45
WHEEL BASE	1093	1092	1104	1114
STACK	613	615	643	691
REACH	394	398	398	392

Example: CRATER LAKE 3.9

CRATER LAKE *HYBRID*



CRATER LAKE 3.9

6061 Aluminum, international Disc brake standard	SR Suntour NEX HLO DS, 63 mm travel, 9 mm QR	Shimano LX T670	Shimano BR-MT200, 160 mm / 160mm



CRATER LAKE 3.8

6061 Aluminum, international Disc brake standard	SR Suntour NEX HLO DS, 63 mm travel, 9 mm QR	Shimano Deore M591, 9-speed	Shimano BR-MT200, 160 mm / 160mm



CRATER LAKE 3.7

6061 Aluminum, international Disc brake standard	SR Suntour NEX DS, 63 mm travel, 9 mm QR	Shimano Acera 360, 8-speed	Shimano BR-MT200, 160 mm / 160mm



CRATER LAKE 3.8

WHEELSIZE	28	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	DI	TR	TR	TR
SIZE / CM	S / 45	M / 50	L / 55	XL / 60	S / 45	M / 50	L / 55
ARTICLE NO. EU / BLU	633013510	633013511	633013512	633013513	633013515	633013516	633013517

- 6061 Aluminum, international Disc brake standard
- SR Suntour NEX HLO DS, 63 mm travel, 9 mm QR
- Shimano Altus M2000
- Shimano Deore M591, 9-speed
- Shimano HG-200, 11-34T
- Shimano FC-T4060, 48 / 36 / 26T
- Aluminum, riserbar, 680mm
- Aluminum, 31.8mm
- 1-1 / 8", 44 / 286-ZS44 / 30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper Z1, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe Smart Sam, 44-622
- Blue



CRATER LAKE 3.9

WHEELSIZE	28	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	DI	TR	TR	TR
SIZE / CM	S / 45	M / 50	L / 55	XL / 60	S / 45	M / 50	L / 55
ARTICLE NO. EU / BLK	633013500	633013501	633013502	633013503	633013505	633013506	633013507

- 6061 Aluminum, international Disc brake standard
- SR Suntour NEX HLO DS, 63 mm travel, 9 mm QR
- Shimano Deore T6000
- Shimano LX T670
- Shimano HG500, 11-32T
- Shimano FC-T521, 48 / 36 / 26T
- Aluminum, riserbar, 680mm
- Aluminum, 31.8mm
- 1-1 / 8", 44 / 286-ZS44 / 30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper Z1, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe CX Comp, 40-622
- Black




CRATER LAKE 3.7


WHEELSIZE	28	28	28	28	28	28	28
FRAME TYPE	DI	DI	DI	DI	TR	TR	TR
SIZE / CM	S / 45	M / 50	L / 55	XL / 60	S / 45	M / 50	L / 55
ARTICLE NO. EU / GRY	633013520	633013521	633013522	633013523	633013525	633013526	633013527

- 6061 Aluminum, international Disc brake standard
- SR Suntour NEX DS, 63 mm travel, 9 mm QR
- Shimano ST-EF505
- Shimano Acera 360, 8-speed
- Shimano HG-200, 11-32T
- Shimano FC-TY301, 50, 48 / 38 / 28T
- Aluminum, riserbar, 680mm
- Aluminum, 31.8mm
- 1-1 / 8", 44 / 286-ZS44 / 30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- Shimano BR-MT200, 160 mm / 160mm
- Rodi Viper Z1, 29" 622-21, Shimano TX-505 CL, 9 mm QR / 9 mm QR
- Schwalbe Smart Sam, 44-622
- Grey

JUNIOR & KIDS

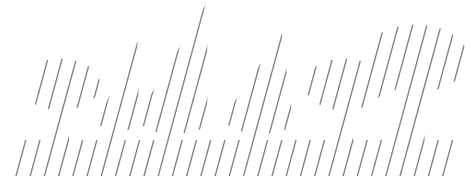


TRAIL

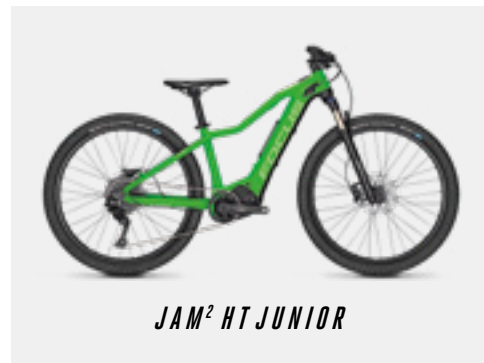


JAM² HT JUNIOR




CROSS-COUNTRY

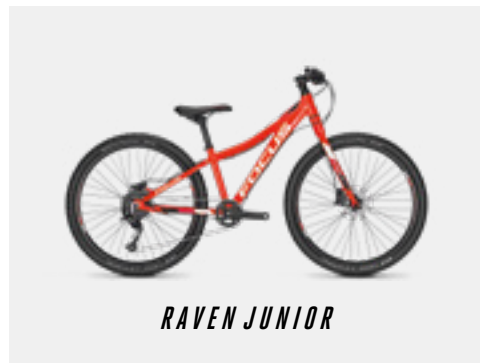

RAVEN JUNIOR

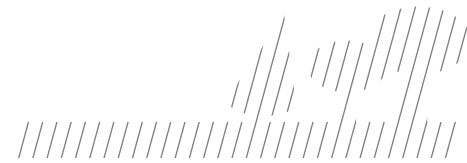

KIDS

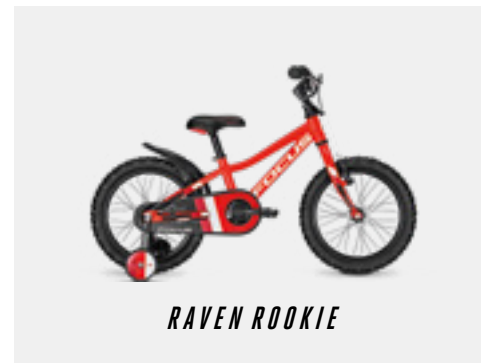

RAVEN ROOKIE



RIDING TOGETHER FROM THE OUTSET

E-HARDTAIL
FOR YOUNG RIDERS



TOP FEATURES



AIRFLOW



INTERNAL CABLE
ROUTING

RIDE BEYOND

JAM² HT JUNIOR

- 80 MM SUSPENSION FORK
- 26" WHEELS AND DISC BRAKES
- FOR RIDER HEIGHT 125 TO 160 CM

A PERFECT FIT
FOR YOUNG RIDERS

It's only fun mountain biking if the bike is right. The adapted geometry of our JUNIOR bikes offers the same ride characteristics as its adult counterpart. With the exception of its 26" wheels – junior wheels for a junior bike.

UNITES
YOUNG AND OLD

More fun for the whole family. The SQUARED EXPERIENCE makes it possible to coordinate a range of performance classes. 378 Wh extra makes for a fun bike ride together.

IT'S THE RIDE
CHARACTERISTICS
THAT COUNT

Thanks to the compact design of the Shimano E8000 motor and our battery, we were able to create a super agile geometry for the JAM² HT JUNIOR. For a whole load of fun on the trail.

SIZE	XS
WHEEL SIZE	26"
SEAT TUBE LENGTH	350
TOP TUBE LENGTH	544
HEAD TUBE ANGLE	67,5
SEAT TUBE ANGLE	74,5
CHAIN STAY LENGTH	425
BB DROP	45
HEAD TUBE LENGTH	110
FORK LENGTH	473
FORK RAKE	39
WHEEL BASE	1063
STACK	572
REACH	385

Example: JAM² HT JUNIOR



JUNIOR & KIDS




7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing	RockShox Recon TK, 100x15 mm QR, 100 mm travel	VP Components	Shimano Steps E8000, 70 Nm, 250 W



6061 Aluminum, BSA BB	Rigid fork, alloy	Shimano Altus, 9-speed



6061 Aluminum, BSA BB	Suspension Fork, QR, coil spring, 60 mm travel	Shimano TY300, 7-speed

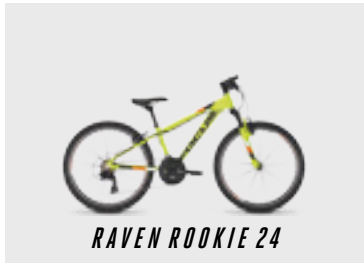

6061 Aluminum, BSA BB	Suspension Fork, QR, coil spring, 50 mm travel	Shimano TY300, 7-speed



6061 Aluminum, BSA BB	Rigid fork	Shimano FT35, 7-speed



6061 Aluminum, BSA BB	Rigid fork



WHEELSIZE	26
SIZE / CM	XS / 35
ARTICLE NO. EU / GRN	633514170



WHEELSIZE	26
SIZE / CM	XS / 36
ARTICLE NO. EU / RED	628019012

- 7005 hydroformed Aluminum, 3D forging, 148x12 mm through axle, internal cable routing, post mount 180 mm, kickstand mount 18 mm
- RockShox Recon TK, 100x15 mm QR, 100 mm travel
- Shimano Steps E8000, 70 Nm, 250 W
- 378 Wh internal
- Shimano Steps E8000, colored LCD display, walk assist, bluetooth
- Shimano Deore 6000
- Shimano Deore 6000, 10-speed
- Shimano HG500, 11-42T
- FC-E8000-34T
- BBB, Aluminum, Di2, flatbar, 700mm, rise: 10mm, backsweep: 9degree
- BBB, Aluminum, Di2, 31.8 mm, 45 mm
- VP Components
- FOCUS Trail SL
- BBB- BSP-20, 31.6 mm, 350mm
- Shimano BR-MT200, 180 mm / 180 mm
- Schürmann Yak 21 Disc, 26" 559-21, Novatec, 148x12 mm / 110x15 mm
- Schwalbe Tough Tom 2.25
- Green

- 6061 Aluminum, BSA BB
- Rigid fork, alloy
- Shimano Altus
- Shimano Altus
- Shimano Altus, 9-speed
- Shimano HG200, 11-36T
- Prowheel Single, SQ, 32T
- Aluminum, riserbar
- Aluminum, 31.8mm
- 1-1/8", 44 / 286-ZS44 / 30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- Shimano M315, 160 mm / 160 mm
- Schwalbe Rocket Ron, 54-559
- Red

JUNIOR & KIDS



- 6061 Aluminum, BSA BB
- Suspension Fork, QR, coil spring, 60 mm travel
- Shimano ST-EF41
- Shimano TY300, 7-speed
- Shimano TZ21, 14-28T
- Shimano FC-TY301, SQ, 42/34/24T
- Aluminum, riserbar
- Aluminum, 31.8mm
- 1-1/8", 44/286-ZS44/30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- V-Brake, alloy
- Schwalbe RigidePac, 54-559
- Green, Red, White

RAVEN ROOKIE 26

WHEELSIZE	26	26	26	26	26
SIZE / CM	XS / 36	S / 40	M / 45	L / 50	XL / 55
ARTICLE NO. EU / RED	628019032	628019033	628019034	628019035	628019036
ARTICLE NO. EU / WHT	628019042	628019043	628019044	628019045	628019046
ARTICLE NO. EU / GRN	628019052	628019053	628019054	628019055	628019056



- 6061 Aluminum, BSA BB
- Rigid fork
- Shimano SLRS36
- Shimano FT35, 7-speed
- Shimano TZ21, 14-28T
- Prowheel Single A107PP, SQ
- Aluminum
- Aluminum, 25.4mm
- 1-1/8", 44/286-ZS44/30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- V-Brake, alloy
- MTB, 20 x 2.15
- Green, Red, White

RAVEN ROOKIE 20

WHEELSIZE	20
SIZE / CM	26
ARTICLE NO. EU / RED	628019010
ARTICLE NO. EU / WHT	628019020
ARTICLE NO. EU / GRN	628019025



- 6061 Aluminum, BSA BB
- Suspension Fork, QR, coil spring, 50 mm travel
- Shimano ST-EF41
- Shimano TY300, 7-speed
- Shimano TZ21, 14-28T
- Prowheel, SQ, 42/34/24T
- Aluminum
- Aluminum, 25.4mm
- 1-1/8", 44/286-ZS44/30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- V-Brake, alloy
- MTB, 24 x 1.95
- Green, Red, White

RAVEN ROOKIE 24

WHEELSIZE	24
SIZE / CM	31
ARTICLE NO. EU / RED	628019031
ARTICLE NO. EU / WHT	628019041
ARTICLE NO. EU / GRN	628019051




- 6061 Aluminum, BSA BB
- Rigid fork
- 18T
- Prowheel Single, SQ
- Kids, riserbar
- kids, quill type
- 1-1/8", 34/25.4-IS34/30
- FOCUS Sport Saddle
- fixed, Aluminum, Ø 27.2
- Canti-Brake
- MTB, 16 x 2
- Green, Red, White

RAVEN ROOKIE 16

WHEELSIZE	16
SIZE / CM	20
ARTICLE NO. EU / RED	628019002
ARTICLE NO. EU / WHT	628019003
ARTICLE NO. EU / GRN	628019005


GEOMETRY

JAM² 9.9 NINE/9.6 NINE/6.8 NINE

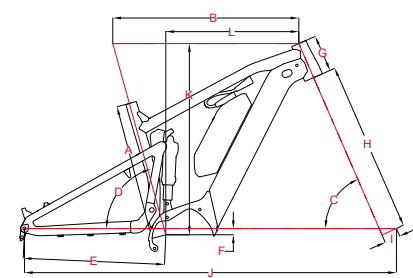


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	582	602	622	647
C STEERING ANGLE (°)	66,1	66,1	66,1	66,1
D SEAT TUBE ANGLE (°)	74,1	74,1	74,1	74,1
E CHAINSTAY LENGTH (MM)	470	470	470	470
F BOTTOM BRACKET DROP (MM)	16,5	16,5	16,5	16,5
G HEAD TUBE LENGTH (MM)	120	120	140	160
H FORK CONSTRUCTION HEIGHT (MM)	561	561	561	561
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1198	1218	1233	1264
K STACK (MM)	620	620	638	656
L REACH (MM)	405	425	440	455

JAM² 9.8 DRIFTER/6.9 DRIFTER

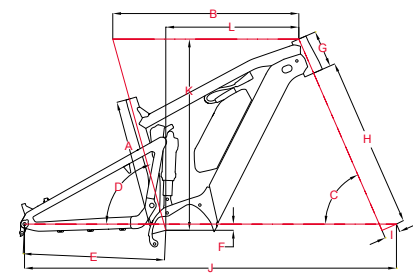


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"/27.5"+	29"/27.5"+	29"/27.5"+	29"/27.5"+
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	584	604	624	649
C STEERING ANGLE (°)	65,6	65,6	65,6	65,6
D SEAT TUBE ANGLE (°)	73,6	73,6	73,6	73,6
E CHAINSTAY LENGTH (MM)	457	457	457	457
F BOTTOM BRACKET DROP (MM)	18	18	18	18
G HEAD TUBE LENGTH (MM)	120	120	140	160
H FORK CONSTRUCTION HEIGHT (MM)	557	557	557	557
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1188	1204	1219	1250
K STACK (MM)	624	624	634	652
L REACH (MM)	405	425	440	455

JAM² 9.7 PLUS/9.6 PLUS/6.8 PLUS

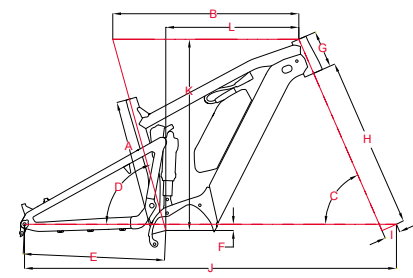


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	27.5"+	27.5"+	27.5"+	27.5"+
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	582	602	622	647
C STEERING ANGLE (°)	66,1	66,1	66,1	66,1
D SEAT TUBE ANGLE (°)	74,1	74,1	74,1	74,1
E CHAINSTAY LENGTH (MM)	457	457	457	457
F BOTTOM BRACKET DROP (MM)	16,5	16,5	16,5	16,5
G HEAD TUBE LENGTH (MM)	120	120	140	160
H FORK CONSTRUCTION HEIGHT (MM)	561	561	561	561
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1185	1205	1218	1251
K STACK (MM)	620	620	638	656
L REACH (MM)	405	425	440	455

JAM² 6.7 NINE

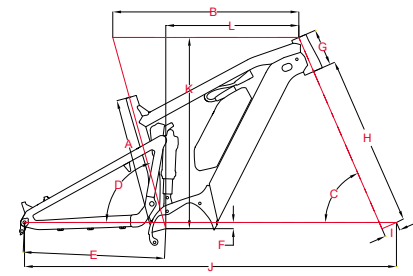


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	582	602	622	647
C STEERING ANGLE (°)	66,5	66,5	66,5	66,5
D SEAT TUBE ANGLE (°)	74,5	74,5	74,5	74,5
E CHAINSTAY LENGTH (MM)	470	470	470	470
F BOTTOM BRACKET DROP (MM)	20	20	20	20
G HEAD TUBE LENGTH (MM)	120	120	140	160
H FORK CONSTRUCTION HEIGHT (MM)	551	551	551	551
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1195	1215	1230	1261
K STACK (MM)	618	618	636	654
L REACH (MM)	410	430	445	460

JAM² 6.7 PLUS

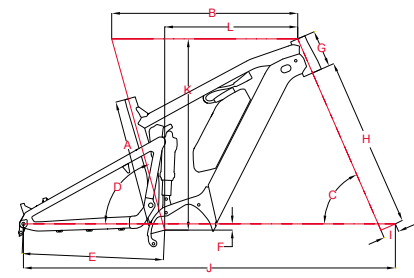


FOCUS SAM² 6.9/6.8/6.7

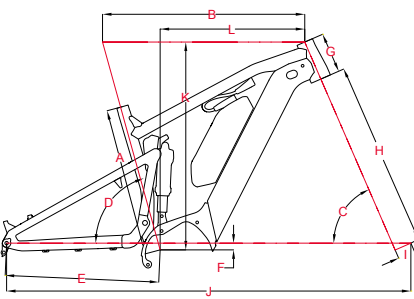

WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	27.5"+	27.5"+	27.5"+	27.5"+
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	582	602	622	647
C STEERING ANGLE (°)	66,5	66,5	66,5	66,5
D SEAT TUBE ANGLE (°)	74,5	74,5	74,5	74,5
E CHAINSTAY LENGTH (MM)	457	457	457	457
F BOTTOM BRACKET DROP (MM)	20	20	20	20
G HEAD TUBE LENGTH (MM)	120	120	140	160
H FORK CONSTRUCTION HEIGHT (MM)	551	551	551	551
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1182	1202	1215	1248
K STACK (MM)	618	618	636	654
L REACH (MM)	410	430	445	460


WHEEL SIZE	S	M	L
WHEEL DIAMETER	27.5"	27.5"	27.5"
A SEAT TUBE LENGTH (MM)	420	440	480
B TOP TUBE LENGTH (MM)	585	604	624
C STEERING ANGLE (°)	65	65	65
D SEAT TUBE ANGLE (°)	75	75	75
E CHAINSTAY LENGTH (MM)	455	455	455
F BOTTOM BRACKET DROP (MM)	12	12	12
G HEAD TUBE LENGTH (MM)	118	118	138
H FORK CONSTRUCTION HEIGHT (MM)	562	562	562
I PRE-RAKED FORK (MM)	42	42	42
J WHEELBASE LENGTH (MM)	1196	1217	1240
K STACK (MM)	607	607	625
L REACH (MM)	425	440	455

RAVEN² 9.9/9.8

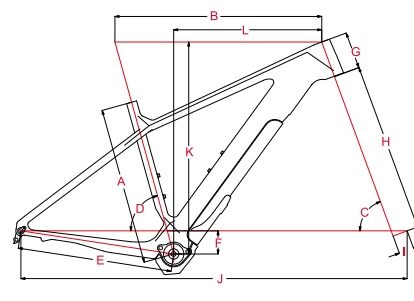

WHEEL SIZE	S	M	L
WHEEL DIAMETER	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	460	500
B TOP TUBE LENGTH (MM)	592	608	629
C STEERING ANGLE (°)	69,8	69,8	69,8
D SEAT TUBE ANGLE (°)	74,5	74,5	74,5
E CHAINSTAY LENGTH (MM)	454	454	454
F BOTTOM BRACKET DROP (MM)	68	68	68
G HEAD TUBE LENGTH (MM)	104	107	130
H FORK CONSTRUCTION HEIGHT (MM)	501	501	501
I PRE-RAKED FORK (MM)	44	44	44
J WHEELBASE LENGTH (MM)	1100	1116	1139
K STACK (MM)	620	623	644
L REACH (MM)	420	435	450


WHISTLER² 6.9 EQP/6.9

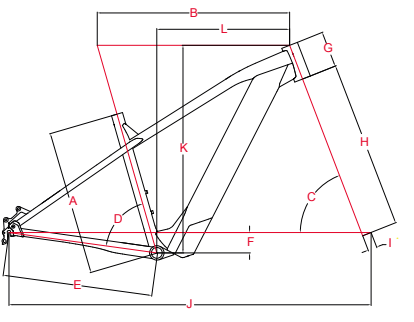

WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	400	440	480	520
B TOP TUBE LENGTH (MM)	563	586	611	637
C STEERING ANGLE (°)	69	69	69	69
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	455	455	455	455
F BOTTOM BRACKET DROP (MM)	62	62	62	62
G HEAD TUBE LENGTH (MM)	100	110	130	150
H FORK CONSTRUCTION HEIGHT (MM)	516	516	516	516
I PRE-RAKED FORK (MM)	46	46	46	46
J WHEELBASE LENGTH (MM)	1097	1120	1147	1175
K STACK (MM)	621	630	649	669
L REACH (MM)	385	405	425	445


GEOMETRY

WHISTLER² 3.9

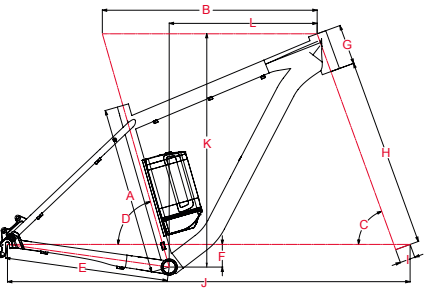


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	460	500	540
B TOP TUBE LENGTH (MM)	575	587	608	623
C STEERING ANGLE (°)	70	70	70	70
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	448	448	448	448
F BOTTOM BRACKET DROP (MM)	62	62	62	62
G HEAD TUBE LENGTH (MM)	100	110	130	150
H FORK CONSTRUCTION HEIGHT (MM)	516	516	516	516
I PRE-RAKED FORK (MM)	46	46	46	46
J WHEELBASE LENGTH (MM)	1090	1103	1125	1142
K STACK (MM)	626	635	654	672
L REACH (MM)	395	405	420	430

WHISTLER² 3.9

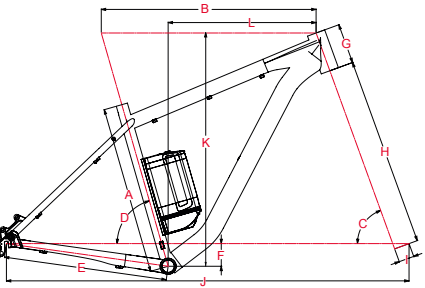


WHEEL SIZE	XS	S
WHEEL DIAMETER	27.5"	27.5"
A SEAT TUBE LENGTH (MM)	380	420
B TOP TUBE LENGTH (MM)	553	566
C STEERING ANGLE (°)	69	69
D SEAT TUBE ANGLE (°)	73,5	73,5
E CHAINSTAY LENGTH (MM)	448	448
F BOTTOM BRACKET DROP (MM)	48	48
G HEAD TUBE LENGTH (MM)	110	120
H FORK CONSTRUCTION HEIGHT (MM)	497	497
I PRE-RAKED FORK (MM)	42	42
J WHEELBASE LENGTH (MM)	1074	1087
K STACK (MM)	600	610
L REACH (MM)	375	385

JARIFA² 6.9 PLUS/6.9/6.8 PLUS/6.8/
6.7 PLUS/6.7

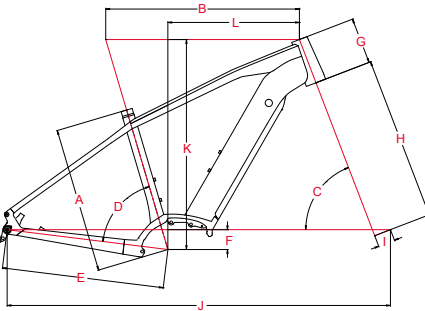


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	27.5"+	27.5"+	27.5"+	27.5"+
A SEAT TUBE LENGTH (MM)	400	440	480	520
B TOP TUBE LENGTH (MM)	578	588	608	623
C STEERING ANGLE (°)	70	70	70	70
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	490	490	490	490
F BOTTOM BRACKET DROP (MM)	60	60	60	60
G HEAD TUBE LENGTH (MM)	120	120	140	160
H FORK CONSTRUCTION HEIGHT (MM)	509	509	509	509
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1145	1155	1177	1194
K STACK (MM)	636	636	655	674
L REACH (MM)	395	405	420	430

JARIFA² 6.9/6.8/6.7

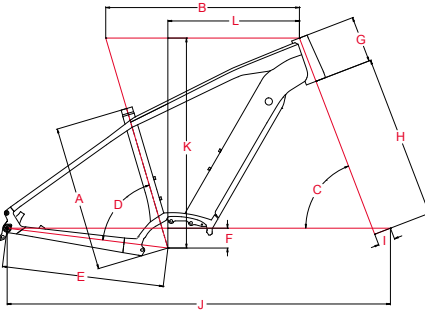


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	400	440	480	520
B TOP TUBE LENGTH (MM)	578	588	608	623
C STEERING ANGLE (°)	70	70	70	70
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	490	490	490	490
F BOTTOM BRACKET DROP (MM)	60	60	60	60
G HEAD TUBE LENGTH (MM)	120	120	140	160
H FORK CONSTRUCTION HEIGHT (MM)	509	509	509	509
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1145	1155	1177	1194
K STACK (MM)	636	636	655	674
L REACH (MM)	395	405	420	430

JARIFA² 6.9/6.8/6.7

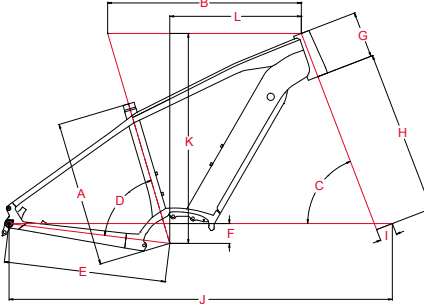


WHEEL SIZE	XS	S
WHEEL DIAMETER	27.5"	27.5"
A SEAT TUBE LENGTH (MM)	360	400
B TOP TUBE LENGTH (MM)	554	567
C STEERING ANGLE (°)	69	69
D SEAT TUBE ANGLE (°)	73,5	73,5
E CHAINSTAY LENGTH (MM)	475	475
F BOTTOM BRACKET DROP (MM)	48	48
G HEAD TUBE LENGTH (MM)	120	130
H FORK CONSTRUCTION HEIGHT (MM)	489	489
I PRE-RAKED FORK (MM)	42	42
J WHEELBASE LENGTH (MM)	1106	1120
K STACK (MM)	604	614
L REACH (MM)	375	385

JARIFA² 3.9

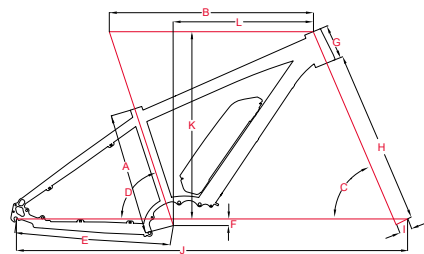


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	460	500	540
B TOP TUBE LENGTH (MM)	570	583	603	619
C STEERING ANGLE (°)	70	70	70	70
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	485	485	485	485
F BOTTOM BRACKET DROP (MM)	62	62	62	62
G HEAD TUBE LENGTH (MM)	100	110	130	150
H FORK CONSTRUCTION HEIGHT (MM)	501	501	501	501
I PRE-RAKED FORK (MM)	44	44	44	44
J WHEELBASE LENGTH (MM)	1124	1137	1159	1176
K STACK (MM)	612	622	640	659
L REACH (MM)	395	405	420	430

JARIFA² 3.9

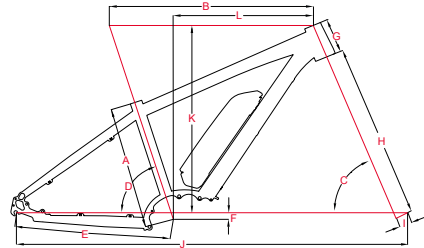

WHEEL SIZE	XS	S
WHEEL DIAMETER	27.5"	27.5"
A SEAT TUBE LENGTH (MM)	400	440
B TOP TUBE LENGTH (MM)	562	583
C STEERING ANGLE (°)	69	69
D SEAT TUBE ANGLE (°)	73,5	73,5
E CHAINSTAY LENGTH (MM)	470	470
F BOTTOM BRACKET DROP (MM)	48	48
G HEAD TUBE LENGTH (MM)	120	140
H FORK CONSTRUCTION HEIGHT (MM)	487	487
I PRE-RAKED FORK (MM)	44	44
J WHEELBASE LENGTH (MM)	1112	1131
K STACK (MM)	599	620
L REACH (MM)	385	400


JAM² HT 6.9 PLUS/6.9 NINE / 6.8
PLUS / 6.8 NINE

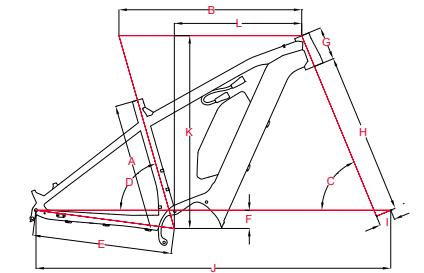

WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"/27.5"+	29"/27.5"+	29"/27.5"+	29"/27.5"+
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	589	602	622	638
C STEERING ANGLE (°)	67,5	67,5	67,5	67,5
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	460	460	460	460
F BOTTOM BRACKET DROP (MM)	60	60	60	60
G HEAD TUBE LENGTH (MM)	100	110	130	150
H FORK CONSTRUCTION HEIGHT (MM)	531	531	531	531
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1156	1170	1192	1215
K STACK (MM)	626	635	654	672
L REACH (MM)	410	420	435	450


GEOMETRY

PARALANE² 9.9/9.8/9.7/9.6/6.9/6.8

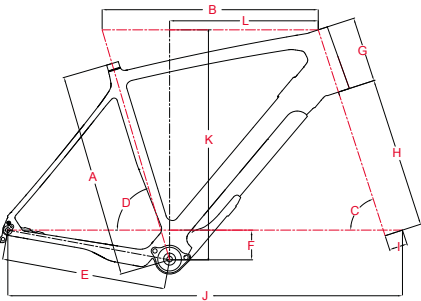


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	480	516	540	570
B TOP TUBE LENGTH (MM)	525	547	568	591
C STEERING ANGLE (°)	71,5	72	72,5	72,5
D SEAT TUBE ANGLE (°)	74,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	415	415	415	415
F BOTTOM BRACKET DROP (MM)	75	75	75	75
G HEAD TUBE LENGTH (MM)	150	165	190	215
H FORK CONSTRUCTION HEIGHT (MM)	380	380	380	380
I PRE-RAKED FORK (MM)	46	46	46	46
J WHEELBASE LENGTH (MM)	990	996	1014	1036
K STACK (MM)	564	580	605	630
L REACH (MM)	370	375	390	405

AVENTURA² 6.8/6.7

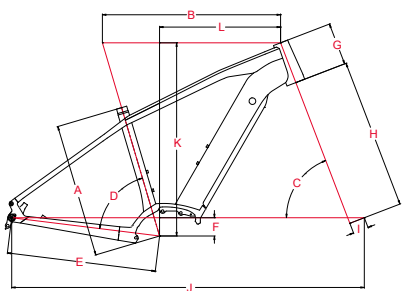


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	460	500	540
B TOP TUBE LENGTH (MM)	570	583	603	619
C STEERING ANGLE (°)	70	70	70	70
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	485	485	485	485
F BOTTOM BRACKET DROP (MM)	62	62	62	62
G HEAD TUBE LENGTH (MM)	100	110	130	150
H FORK CONSTRUCTION HEIGHT (MM)	501	501	501	501
I PRE-RAKED FORK (MM)	44	44	44	44
J WHEELBASE LENGTH (MM)	1124	1137	1159	1176
K STACK (MM)	612	622	640	659
L REACH (MM)	395	405	420	430

PLANET² 9.8

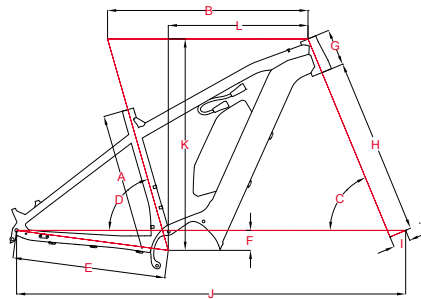


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	28"	28"	28"	28"
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	586	599	619	635
C STEERING ANGLE (°)	67,8	67,8	67,8	67,8
D SEAT TUBE ANGLE (°)	74,3	74,3	74,3	74,3
E CHAINSTAY LENGTH (MM)	460	460	460	460
F BOTTOM BRACKET DROP (MM)	70	70	70	70
G HEAD TUBE LENGTH (MM)	110	120	130	150
H FORK CONSTRUCTION HEIGHT (MM)	505	505	505	505
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1146	1160	1182	1205
K STACK (MM)	617	627	645	663
L REACH (MM)	423	433	448	463

AVENTURA² 6.8/6.7

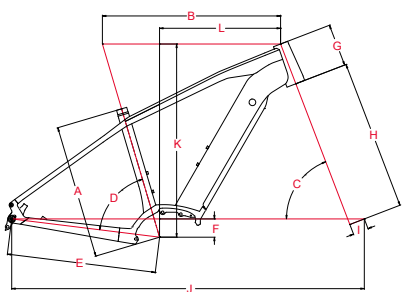


WHEEL SIZE	XS	S
WHEEL DIAMETER	27,5"	27,5"
A SEAT TUBE LENGTH (MM)	400	440
B TOP TUBE LENGTH (MM)	562	583
C STEERING ANGLE (°)	69	69
D SEAT TUBE ANGLE (°)	73,5	73,5
E CHAINSTAY LENGTH (MM)	470	470
F BOTTOM BRACKET DROP (MM)	48	48
G HEAD TUBE LENGTH (MM)	120	140
H FORK CONSTRUCTION HEIGHT (MM)	487	487
I PRE-RAKED FORK (MM)	44	44
J WHEELBASE LENGTH (MM)	1112	1131
K STACK (MM)	599	620
L REACH (MM)	385	400

PLANET² 6.8/6.7

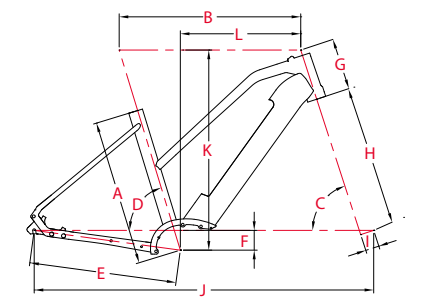


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	28"	28"	28"	28"
A SEAT TUBE LENGTH (MM)	430	480	530	580
B TOP TUBE LENGTH (MM)	588	597	606	615
C STEERING ANGLE (°)	72	72	72	72
D SEAT TUBE ANGLE (°)	73	73	73	73
E CHAINSTAY LENGTH (MM)	485	485	485	485
F BOTTOM BRACKET DROP (MM)	65	65	65	65
G HEAD TUBE LENGTH (MM)	160	170	180	190
H FORK CONSTRUCTION HEIGHT (MM)	470	470	470	470
I PRE-RAKED FORK (MM)	45	45	45	45
J WHEELBASE LENGTH (MM)	1107	1117	1126	1135
K STACK (MM)	64	658	667	677
L REACH (MM)	390	396	402	408

FOCUS 01E 9.9

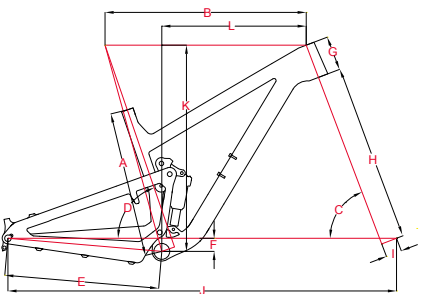


WHEEL SIZE	S	M	L
WHEEL DIAMETER	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	450	480
B TOP TUBE LENGTH (MM)	585	602	622
C STEERING ANGLE (°)	69,2	69,2	69,2
D SEAT TUBE ANGLE (°)	74,5	74,5	74,5
E CHAINSTAY LENGTH (MM)	448	448	448
F BOTTOM BRACKET DROP (MM)	38	38	38
G HEAD TUBE LENGTH (MM)	100	112	125
H FORK CONSTRUCTION HEIGHT (MM)	516	516	516
I PRE-RAKED FORK (MM)	51	51	51
J WHEELBASE LENGTH (MM)	1120	1138	1159
K STACK (MM)	596	603	619
L REACH (MM)	420	435	450

AVENTURA² 9.8

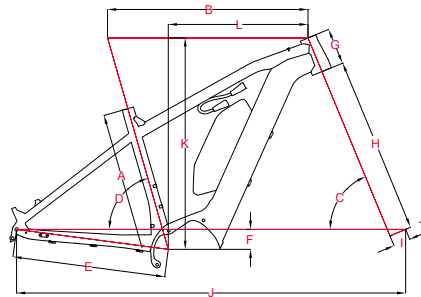

WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	585	599	619	635
C STEERING ANGLE (°)	68,7	68,7	68,7	68,7
D SEAT TUBE ANGLE (°)	75,2	75,2	75,2	75,2
E CHAINSTAY LENGTH (MM)	460	460	460	460
F BOTTOM BRACKET DROP (MM)	69,4	69,4	69,4	69,4
G HEAD TUBE LENGTH (MM)	110	120	130	150
H FORK CONSTRUCTION HEIGHT (MM)	505	505	505	505
I PRE-RAKED FORK (MM)	51	51	46	51
J WHEELBASE LENGTH (MM)	1146	1160	1182	1205
K STACK (MM)	616	625	644	662
L REACH (MM)	420	430	445	460


FOCUS 01E 8.9/8.8

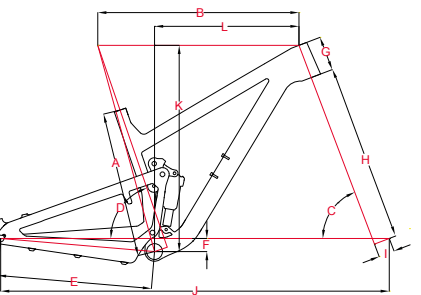

WHEEL SIZE	S	M	L
WHEEL DIAMETER	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	450	480
B TOP TUBE LENGTH (MM)	589	605	625
C STEERING ANGLE (°)	68,4	68,4	68,4
D SEAT TUBE ANGLE (°)	74,2	74,2	74,2
E CHAINSTAY LENGTH (MM)	448	448	448
F BOTTOM BRACKET DROP (MM)	31,5	31,5	31,5
G HEAD TUBE LENGTH (MM)	100	112	125
H FORK CONSTRUCTION HEIGHT (MM)	531	531	531
I PRE-RAKED FORK (MM)	51	51	51
J WHEELBASE LENGTH (MM)	1139	1158	1179
K STACK (MM)	604	611	628
L REACH (MM)	410	426	441


GEOMETRY

JAM 8.9 NINE/6.9 NINE/6.8 NINE

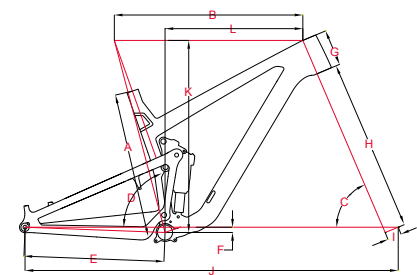


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	440	480	510
B TOP TUBE LENGTH (MM)	585	605	632	657
C STEERING ANGLE (°)	67,3	67,3	67,3	67,3
D SEAT TUBE ANGLE (°)	74,2	74,2	74,2	74,2
E CHAINSTAY LENGTH (MM)	440	440	440	440
F BOTTOM BRACKET DROP (MM)	29	29	29	29
G HEAD TUBE LENGTH (MM)	110	110	140	160
H FORK CONSTRUCTION HEIGHT (MM)	551	551	551	551
I PRE-RAKED FORK (MM)	51	51	51	51
J WHEELBASE LENGTH (MM)	1143	1172	1201	1229
K STACK (MM)	622	622	645	662
L REACH (MM)	410	430	450	470

JAM 6.9 SEVEN/6.8 SEVEN

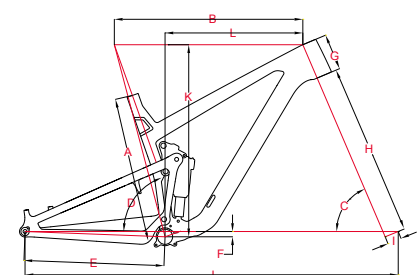


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	27.5"	27.5"	27.5"	27.5"
A SEAT TUBE LENGTH (MM)	410	440	470	500
B TOP TUBE LENGTH (MM)	574	598	623	648
C STEERING ANGLE (°)	66,3	66,3	66,3	66,3
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	425	425	425	425
F BOTTOM BRACKET DROP (MM)	12	12	12	12
G HEAD TUBE LENGTH (MM)	110	110	135	155
H FORK CONSTRUCTION HEIGHT (MM)	542	542	542	542
I PRE-RAKED FORK (MM)	42	42	42	42
J WHEELBASE LENGTH (MM)	1131	1156	1186	1214
K STACK (MM)	586	595	620	637
L REACH (MM)	410	430	450	470

FOCUS SAM 9.9/8.9

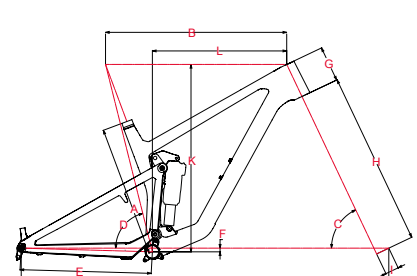


WHEEL SIZE	S	M	L
WHEEL DIAMETER	27.5"	27.5"	27.5"
A SEAT TUBE LENGTH (MM)	400	425	450
B TOP TUBE LENGTH (MM)	581	603	623
C STEERING ANGLE (°)	64,8	64,8	64,8
D SEAT TUBE ANGLE (°)	75	75	75
E CHAINSTAY LENGTH (MM)	428	428	428
F BOTTOM BRACKET DROP (MM)	13	13	13
G HEAD TUBE LENGTH (MM)	106	115	130
H FORK CONSTRUCTION HEIGHT (MM)	562	562	562
I PRE-RAKED FORK (MM)	42	42	42
J WHEELBASE LENGTH (MM)	1170	1195	1221
K STACK (MM)	600	610	623
L REACH (MM)	420	440	460

RAVEN 9.9/8.9/8.8/8.7/8.6

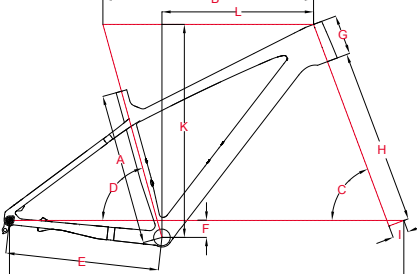


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	460	500	540
B TOP TUBE LENGTH (MM)	592	608	629	649
C STEERING ANGLE (°)	69,8	69,8	69,8	69,8
D SEAT TUBE ANGLE (°)	74,5	74,5	74,5	74,5
E CHAINSTAY LENGTH (MM)	435	435	435	435
F BOTTOM BRACKET DROP (MM)	68	68	68	68
G HEAD TUBE LENGTH (MM)	104	107	130	150
H FORK CONSTRUCTION HEIGHT (MM)	501	501	501	501
I PRE-RAKED FORK (MM)	44	44	44	44
J WHEELBASE LENGTH (MM)	1100	1116	1139	1160
K STACK (MM)	620	623	644	663
L REACH (MM)	420	435	450	465

WHISTLER 6.9/6.8

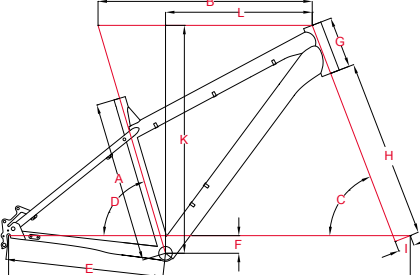


WHEEL SIZE	S	M	L
WHEEL DIAMETER	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	470	520
B TOP TUBE LENGTH (MM)	600	618	632
C STEERING ANGLE (°)	70	70	70
D SEAT TUBE ANGLE (°)	73	73	73
E CHAINSTAY LENGTH (MM)	440	440	440
F BOTTOM BRACKET DROP (MM)	46	46	46
G HEAD TUBE LENGTH (MM)	108	110	125
H FORK CONSTRUCTION HEIGHT (MM)	515	515	515
I PRE-RAKED FORK (MM)	46	46	46
J WHEELBASE LENGTH (MM)	1092	1111	1126
K STACK (MM)	640	642	655
L REACH (MM)	404	422	432

WHISTLER 3.9/3.8/3.7/3.6/3.5/3.4

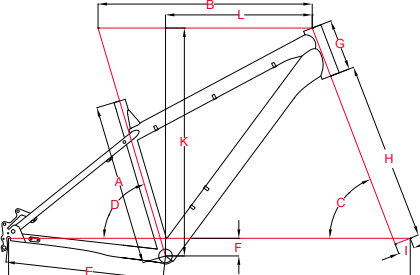


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	29"	29"	29"	29"
A SEAT TUBE LENGTH (MM)	420	460	500	540
B TOP TUBE LENGTH (MM)	570	583	603	619
C STEERING ANGLE (°)	70	70	70	70
D SEAT TUBE ANGLE (°)	74	74	74	74
E CHAINSTAY LENGTH (MM)	447	447	447	447
F BOTTOM BRACKET DROP (MM)	62	62	62	62
G HEAD TUBE LENGTH (MM)	100	110	130	150
H FORK CONSTRUCTION HEIGHT (MM)	501	501	501	501
I PRE-RAKED FORK (MM)	44	44	44	44
J WHEELBASE LENGTH (MM)	1081	1095	1117	1133
K STACK (MM)	612	622	640	660
L REACH (MM)	395	405	420	430

WHISTLER 3.9/3.8/3.7/3.6/3.5/3.4

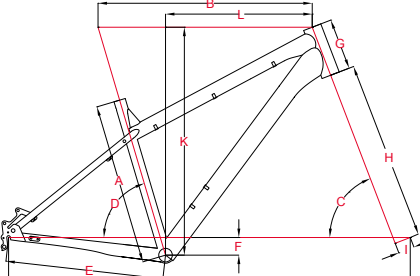

WHEEL SIZE	XS	S
WHEEL DIAMETER	27.5"	27.5"
A SEAT TUBE LENGTH (MM)	360	400
B TOP TUBE LENGTH (MM)	550	562
C STEERING ANGLE (°)	69	69
D SEAT TUBE ANGLE (°)	73,5	73,5
E CHAINSTAY LENGTH (MM)	430	430
F BOTTOM BRACKET DROP (MM)	48	48
G HEAD TUBE LENGTH (MM)	110	120
H FORK CONSTRUCTION HEIGHT (MM)	487	487
I PRE-RAKED FORK (MM)	44	44
J WHEELBASE LENGTH (MM)	1054	1068
K STACK (MM)	590	600
L REACH (MM)	375	385


IZALCO MAX DISC 9.9/9.8 / 9.7/8.9 / 8.8/8.7

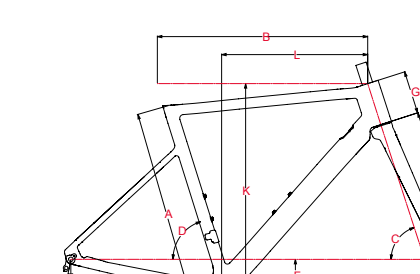

WHEEL SIZE	XXS	XS	S	M	L	XL	XXL
WHEEL DIAMETER	700C	700C	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	430	470	490	510	530	550	590
B TOP TUBE LENGTH (MM)	504	517	534	551	564	582	602
C STEERING ANGLE (°)	69,5	70,5	71,5	72	72	72,5	72,5
D SEAT TUBE ANGLE (°)	74	73,5	73,5	73,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	410	410	410	410	410	410	410
F BOTTOM BRACKET DROP (MM)	78	78	78	78	78	78	78
G HEAD TUBE LENGTH (MM)	80	80	100	115	125	150	185
H FORK CONSTRUCTION HEIGHT (MM)	392	392	392	392	392	392	392
I PRE-RAKED FORK (MM)	46	46	46	46	46	46	46
J WHEELBASE LENGTH (MM)	975	975	985	997	1010	1024	1044
K STACK (MM)	502	505	528	544	554	579	613
L REACH (MM)	360	368	378	390	400	410	420


GEOMETRY

IZALCO MAX D12 FS

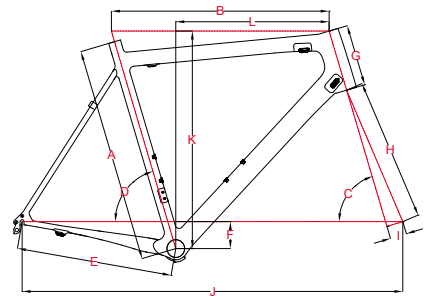


WHEEL SIZE	XXS	XS	S	M	L	XL	XXL
WHEEL DIAMETER	700C	700C	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	480	500	520	540	560	580	610
B TOP TUBE LENGTH (MM)	521	530	536	549	565	580	604
C STEERING ANGLE (°)	70,8	71,4	71,7	72,5	73,5	73,6	73,7
D SEAT TUBE ANGLE (°)	73,8	73,6	73,6	73,5	73,5	73,4	73,2
E CHAINSTAY LENGTH (MM)	405	405	405	405	405	405	405
F BOTTOM BRACKET DROP (MM)	70	70	70	70	70	70	70
G HEAD TUBE LENGTH (MM)	110	115	120	135	160	180	200
H FORK CONSTRUCTION HEIGHT (MM)	370	370	370	370	370	370	370
I PRE-RAKED FORK (MM)	43	43	46	43	43	43	43
J WHEELBASE LENGTH (MM)	970	972	977	981	988	1001	1022
K STACK (MM)	508	515	521	537	565	584	603
L REACH (MM)	375	379	384	390	398	405	420

IZALCO RACE DISC 9.9

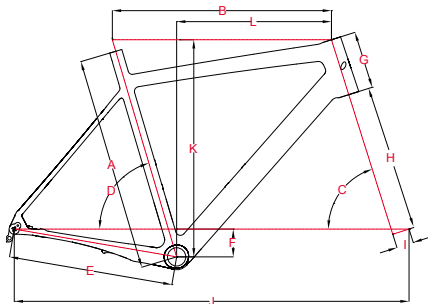


WHEEL SIZE	XS	S	M	L	XL
WHEEL DIAMETER	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	480	510	540	570	600
B TOP TUBE LENGTH (MM)	503	537	552	569	589
C STEERING ANGLE (°)	71	72	72,5	73,5	73,5
D SEAT TUBE ANGLE (°)	75,5	73,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	415	415	415	415	415
F BOTTOM BRACKET DROP (MM)	70	70	70	70	70
G HEAD TUBE LENGTH (MM)	115	130	145	165	185
H FORK CONSTRUCTION HEIGHT (MM)	370	370	370	370	370
I PRE-RAKED FORK (MM)	43	43	43	43	43
J WHEELBASE LENGTH (MM)	978	984	995	1002	1022
K STACK (MM)	513	531	547	569	589
L REACH (MM)	370	380	390	400	415

IZALCO RACE 9.9/9.8/9.7

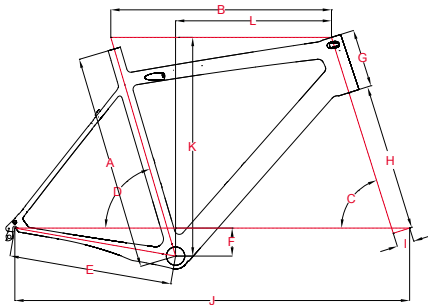


WHEEL SIZE	XS	S	M	L	XL
WHEEL DIAMETER	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	480	510	540	570	600
B TOP TUBE LENGTH (MM)	503	537	552	569	589
C STEERING ANGLE (°)	71	72	72,5	73,5	73,5
D SEAT TUBE ANGLE (°)	75,5	73,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	408	408	408	408	408
F BOTTOM BRACKET DROP (MM)	70	70	70	70	70
G HEAD TUBE LENGTH (MM)	115	130	145	165	185
H FORK CONSTRUCTION HEIGHT (MM)	370	370	370	370	370
I PRE-RAKED FORK (MM)	43	43	43	43	43
J WHEELBASE LENGTH (MM)	978	984	995	1002	1022
K STACK (MM)	513	531	547	569	588
L REACH (MM)	370	380	390	400	415

IZALCO RACE 6.9/6.7

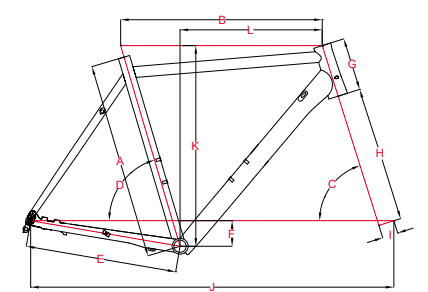


WHEEL SIZE	XS	S	M	L	XL
WHEEL DIAMETER	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	480	510	540	570	600
B TOP TUBE LENGTH (MM)	503	537	552	569	589
C STEERING ANGLE (°)	71	72	72,5	73,5	73,5
D SEAT TUBE ANGLE (°)	75,5	73,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	408	408	408	408	408
F BOTTOM BRACKET DROP (MM)	70	70	70	70	70
G HEAD TUBE LENGTH (MM)	115	130	145	165	185
H FORK CONSTRUCTION HEIGHT (MM)	370	370	370	370	370
I PRE-RAKED FORK (MM)	43	43	43	43	43
J WHEELBASE LENGTH (MM)	978	984	995	1002	1022
K STACK (MM)	513	531	547	569	588
L REACH (MM)	370	380	390	400	415

PARALANE 9.9/9.8/9.7/8.9/6.9/5.9

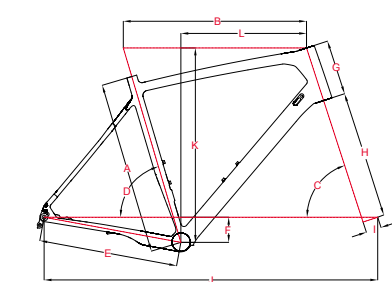


WHEEL SIZE	XS	S	M	L	XL	XXL
WHEEL DIAMETER	700C	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	455	485	516	535	555	595
B TOP TUBE LENGTH (MM)	497	526	547	560	577	591
C STEERING ANGLE (°)	71	71,5	72	72	72,5	72,5
D SEAT TUBE ANGLE (°)	75,5	74,5	73,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	415	415	415	415	415	415
F BOTTOM BRACKET DROP (MM)	75	75	75	75	75	75
G HEAD TUBE LENGTH (MM)	120	150	165	180	200	215
H FORK CONSTRUCTION HEIGHT (MM)	380	380	380	380	380	380
I PRE-RAKED FORK (MM)	46	46	46	46	46	46
J WHEELBASE LENGTH (MM)	979	990	996	1010	1021	1035
K STACK (MM)	531	564	580	594	615	630
L REACH (MM)	360	370	375	384	394	404

MARES 9.9/9.8/9.7

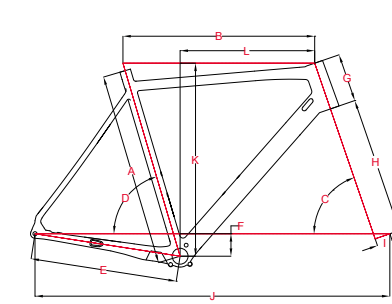


WHEEL SIZE	XS	S	M	L	XL	XXL
WHEEL DIAMETER	700C	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	480	510	540	560	580	600
B TOP TUBE LENGTH (MM)	523	534	544	555	565	577
C STEERING ANGLE (°)	70	70	70,5	71	71	71,5
D SEAT TUBE ANGLE (°)	73,5	73,5	73,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	425	425	425	425	425	425
F BOTTOM BRACKET DROP (MM)	65	65	65	65	65	65
G HEAD TUBE LENGTH (MM)	110	120	130	140	150	160
H FORK CONSTRUCTION HEIGHT (MM)	400	400	400	400	400	400
I PRE-RAKED FORK (MM)	46	46	46	46	46	46
J WHEELBASE LENGTH (MM)	1003	1015	1020	1027	1037	1045
K STACK (MM)	527	537	548	559	569	580
L REACH (MM)	365	375	382	390	397	405

MARES 6.9/6.8/6.7

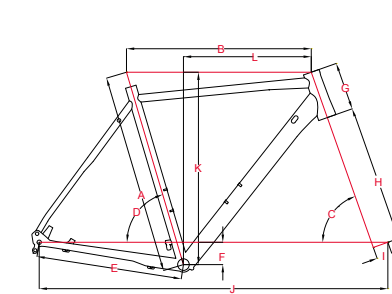

WHEEL SIZE	XS	S	M	L	XL	XXL
WHEEL DIAMETER	700C	700C	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	480	510	540	560	580	600
B TOP TUBE LENGTH (MM)	518	529	538	550	558	570
C STEERING ANGLE (°)	70	70	70,5	71	71	71,5
D SEAT TUBE ANGLE (°)	73,5	73,5	73,5	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	425	425	425	425	425	425
F BOTTOM BRACKET DROP (MM)	65	65	65	65	65	65
G HEAD TUBE LENGTH (MM)	120	130	140	150	160	170
H FORK CONSTRUCTION HEIGHT (MM)	400	400	400	400	400	400
I PRE-RAKED FORK (MM)	46	46	46	46	46	46
J WHEELBASE LENGTH (MM)	999	1010	1015	1023	1031	1038
K STACK (MM)	539	549	560	571	581	592
L REACH (MM)	358	367	372	381	386	395


PLANET 6.8/6.7

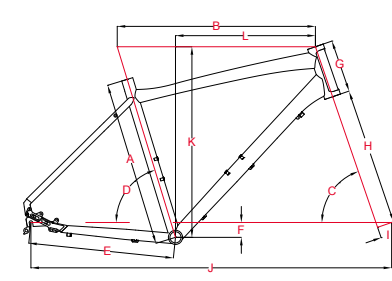

WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	28"	28"	28"	28"
A SEAT TUBE LENGTH (MM)	450	500	550	600
B TOP TUBE LENGTH (MM)	569	584	598	612
C STEERING ANGLE (°)	70,5	70,5	70,5	70,5
D SEAT TUBE ANGLE (°)	72,5	72,5	72,5	72,5
E CHAINSTAY LENGTH (MM)	434	434	434	434
F BOTTOM BRACKET DROP (MM)	62	62	62	62
G HEAD TUBE LENGTH (MM)	155	170	185	195
H FORK CONSTRUCTION HEIGHT (MM)	395	395	395	395
I PRE-RAKED FORK (MM)	46	46	46	46
J WHEELBASE LENGTH (MM)	1056	1063	1078	1087
K STACK (MM)	568	582	596	606
L REACH (MM)	390	400	410	420


GEOMETRY

ARRIBA 3.9/3.8

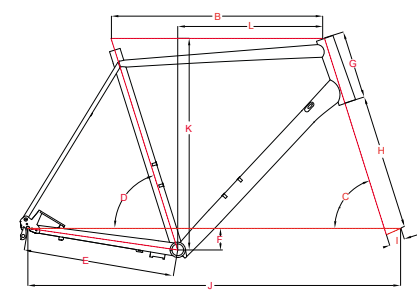


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	28"	28"	28"	28"
A SEAT TUBE LENGTH (MM)	450	500	550	600
B TOP TUBE LENGTH (MM)	569	584	598	612
C STEERING ANGLE [°]	70,5	70,5	70,5	70,5
D SEAT TUBE ANGLE [°]	72,5	72,5	72,5	72,5
E CHAINSTAY LENGTH (MM)	434	434	434	434
F BOTTOM BRACKET DROP (MM)	62	62	62	62
G HEAD TUBE LENGTH (MM)	155	170	185	195
H FORK CONSTRUCTION HEIGHT (MM)	395	395	395	395
I PRE-RAKED FORK (MM)	46	46	46	46
J WHEELBASE LENGTH (MM)	1056	1063	1078	1087
K STACK (MM)	568	582	596	606
L REACH	390	400	410	420

CRATER LAKE 3.9/3.8/3.7

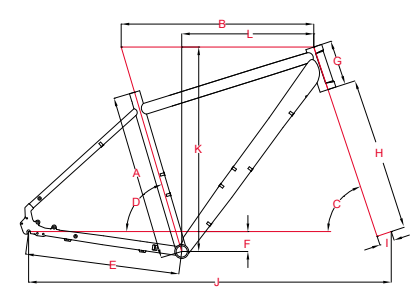


WHEEL SIZE	S	M	L	XL
WHEEL DIAMETER	700C	700C	700C	700C
A SEAT TUBE LENGTH (MM)	450	500	500	550
B TOP TUBE LENGTH (MM)	570	580	595	610
C STEERING ANGLE [°]	71	71,5	71,5	71,5
D SEAT TUBE ANGLE [°]	74	73,5	73,5	73,5
E CHAINSTAY LENGTH (MM)	465	465	465	465
F BOTTOM BRACKET DROP (MM)	60	60	55	55
G HEAD TUBE LENGTH (MM)	135	135	170	220
H FORK CONSTRUCTION HEIGHT (MM)	465	465	465	465
I PRE-RAKED FORK (MM)	45	45	45	45
J WHEELBASE LENGTH (MM)	1093	1092	1104	1114
K STACK (MM)	613	615	643	691
L REACH (MM)	394	398	398	392

JAM² HT JUNIOR

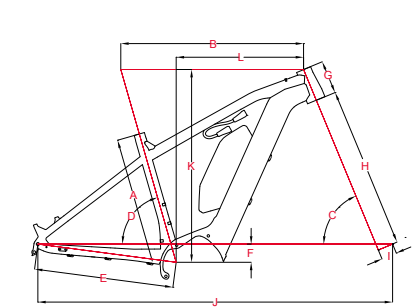

WHEEL SIZE	XS
WHEEL DIAMETER	26"
A SEAT TUBE LENGTH (MM)	350
B TOP TUBE LENGTH (MM)	544
C STEERING ANGLE [°]	67,5
D SEAT TUBE ANGLE [°]	74,5
E CHAINSTAY LENGTH (MM)	425
F BOTTOM BRACKET DROP (MM)	45
G HEAD TUBE LENGTH (MM)	110
H FORK CONSTRUCTION HEIGHT (MM)	473
I PRE-RAKED FORK (MM)	39
J WHEELBASE LENGTH (MM)	1063
K STACK (MM)	572
L REACH (MM)	385

RAVEN JUNIOR

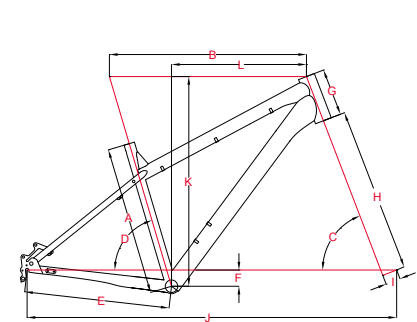

WHEEL SIZE	XS
WHEEL DIAMETER	26"
A SEAT TUBE LENGTH (MM)	320
B TOP TUBE LENGTH (MM)	528
C STEERING ANGLE [°]	69
D SEAT TUBE ANGLE [°]	73,5
E CHAINSTAY LENGTH (MM)	430
F BOTTOM BRACKET DROP (MM)	38
G HEAD TUBE LENGTH (MM)	105
H FORK CONSTRUCTION HEIGHT (MM)	451
I PRE-RAKED FORK (MM)	35
J WHEELBASE LENGTH (MM)	1027
K STACK (MM)	545
L REACH (MM)	366

FOCUS SAM[®] Pro, Olly Wilkins, Joe Connell (St)



IMPRINT

Derby Cycle Werke GmbH
Siemensstraße 1-3
D - 49661 Cloppenburg

Phone: +49 (0)4471.966-111
Fax: +49 (0)4471.966-210
E-Mail: info@derby-cycle.com

Managing Director:
Jan Cornelis van der Heiden (Vors.),
Dr. Alexander Wunsch,
Wolfgang Wildemann

